

Thermal Server Coffee Brewer



Model CWTF-TS with Thermal Server

(Server sold separately)

Dimensions: 27.6" H x 9" W x 18.5" D
(70.1 cm H x 22.9cm W x 47cm D)

Features

Thermal Server Coffee Brewer

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Convenient thermal servers keep coffee hot for hours.
- Thermal servers are easily transported to remote meeting rooms, breakfast bars, etc.
- Pourover model available (CW15-TS).
- Pourover feature included on automatic models.
- Internal components are constructed from stainless steel.
- Hot water faucet available.
- SplashGard® funnel deflects hot liquids away from the hand.
- Holds up to 4" cup.

Related Products

Thermal Server-Black

Product No. :
23300.6101 (Glass Liner)
23300.6120 (Stainless Liner)
Capacity: 84 oz. (2.5 L)



Easy Clear® EQ-17-TL

Product No. : 30200.1000
Dimensions:
12 $\frac{1}{16}$ " H x 2 $\frac{1}{2}$ " W x 3" D
(31.6 cm H x 6.35 cm W x 7.62 cm D)



Easy Clear® ED-17-TL

Product No. : 30201.1001
Dimensions:
8 $\frac{1}{4}$ " H x 2 $\frac{5}{16}$ " Dia.
(20.95 cm H x 5.87 cm Dia.)

Paper Filter Pack

Product No. : 20115.6000
Packed per case: 1,000
Dimensions:
4 $\frac{1}{4}$ " Base x 2 $\frac{3}{4}$ " Sidewall
(10.8 cm Base x 6.98 cm Sidewall)



Thermal Server Booster*

Product No. : 18010.6000
Capacity: 1 Thermal Server
Shipping Weight: 2 lbs. (.9 kg)
Dimensions: 4.5" H x 9 $\frac{1}{4}$ " W x 8 $\frac{1}{4}$ " D
11.4 cm H x 23.5 cm W x 21 cm D



*To be used in conjunction with Thermal Server without base. Product No. : 23300.6105 & 23300.6124.

Model

CW TS

CWT TS

CWTF TS

Agency Listing



Dimensions & Specifications



Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
CW15-TS (Pourover)	23000.6000	120	12.1	1450	1450	3.8 gal/14.4 L	5.1 / .14	35 / 15.9	Yes†
CWT15-TS	23000.6006	120	12.1	1450	1450	3.8 gal/14.4 L	5.1 / .14	37 / 16.8	Yes†
CWTF15-TS*	23000.6012	120	12.1	1450	1450	3.8 gal/14.4 L	5.1 / .14	40 / 18.1	Yes†
CWTF35-TS*	23000.6016	120/240	14.6	3500	3500	7.5 gal/20.8 L	5.1 / .14	41 / 18.6	No

*Includes faucet. †Power cord (NEMA 5-15P) 15 Amp-120V machine only.


Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Model 15 has attached cordset and requires 2-wire plus grounded service rated 120V, single phase, 60Hz.

Model 35 requires 3-wire, grounded service rated 120/208 or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" male flare fitting.

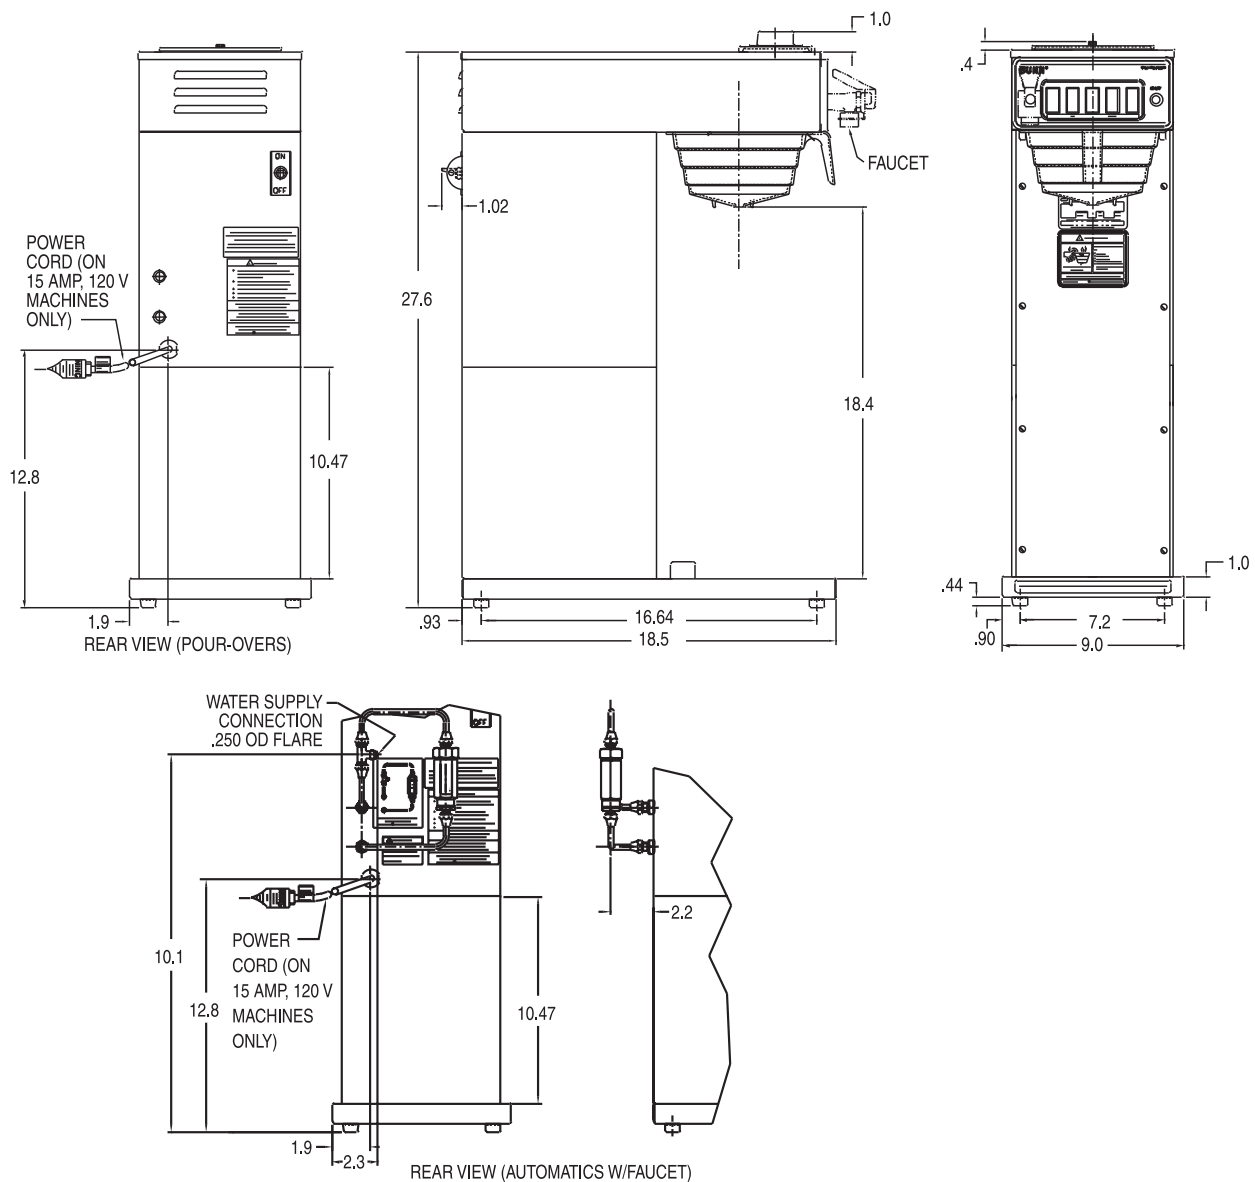

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.