

Thermal Server Coffee Brewer

Features



**Model
CWTF TS***

**Model
CDBCF TS***

Both Models shown with Thermal Server
(Thermal Servers sold separately)
Dimensions: 27.6" H x 9" W x 18.5" D
(70.1cm H x 22.9cm W x 47cm D)

Thermal Server Coffee Brewer

- Brews 3.8 to 5.5 gallons (14.4 to 20.8 liters) of perfect coffee per hour.
- Brewer measures only 9" wide.
- Pourover model available (CW15-TS).
- Pourover feature included on automatic models.
- Internal components are constructed from stainless steel.
- Hot water faucet available.
- SplashGard® funnel deflects hot liquids away from the hand.
- Holds up to 4" cup.

Digital Automatic Models

- Large 200 oz. (5.9 liter) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- Quicker install saves up to 30 minutes. Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- Coffee extraction controlled with pre-infusion or Pulse Brew™ and digital temperature control.

For current specification sheets and other information, go to www.bunn.com.

**International models may vary in appearance.*

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000
Dimensions:
12⁷/₁₆" H x 2¹/₂" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D



Paper Filter Pack

Product No. : 20115.6000
Packed per case: 1,000
Dimensions:
4¹/₄" Base x 2³/₄" Sidewall
10.8 cm Base x 6.98 cm Sidewall



Thermal Server-Black

Product No. : 23300.6001
Capacity: 84 oz. (2.5 L)



Easy Clear® ED-17-TL

Product No. : 30201.1001
Dimensions:
8¹/₄" H x 2⁵/₁₆" Dia.
20.95 cm H x 5.87 cm Dia.






Thermal Server Booster*

Product No. : 18010.6000
Capacity: 1 Thermal Server
Shipping Weight: 2 lbs. (.9 kg)
Dimensions: 6" H x 9¹/₄" W x 8¹/₄" D
15.2 cm H x 23.5 cm W x 21 cm D



*To be used in conjunction with Thermal Server without base. Product No. : 23300.6002 & 23300.6003.

Model	Agency Listing
CW TS	
CWT TS	
CWTF TS	

Dimensions & Specifications



Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
CW15-TS (Pourover)*	23000.6000	120	12.1	1450	1450	3.8 gal/14.4 liter	5.1 / .14	35 / 15.9	Yes†
CWT15-TS*	23000.6006	120	12.1	1450	1450	3.8 gal/14.4 liter	5.1 / .14	37 / 16.8	Yes†
CWTF15-TS*	23000.6012	120	12.1	1450	1450	3.8 gal/14.4 liter	5.1 / .14	40 / 18.1	Yes†
CWTF35-TS*	23000.6016	120/240	14.6	3500	3500	5.5 gal/20.8 liter	5.1 / .14	41 / 18.6	No
CDBCF15-TS**	29400.6000	120	12.5	1450	1500	4.5 gal/17.1 liter	5.1 / .14	37 / 16.8	Yes†
CDBCF35-TS**	29400.6002	120/240	14.6	3500	3500	7.5 gal/28.4 liter	5.1 / .14	37 / 16.8	No

* Includes plastic funnel & black trunk


** Includes Stainless funnel and black trunk.

† Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Model 15 has attached cordset and requires 2-wire plus grounded service rated 120V, single phase, 60Hz.
Model 35 requires 3-wire, grounded service rated 120/208 or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" (6.4 mm) male flare fitting.

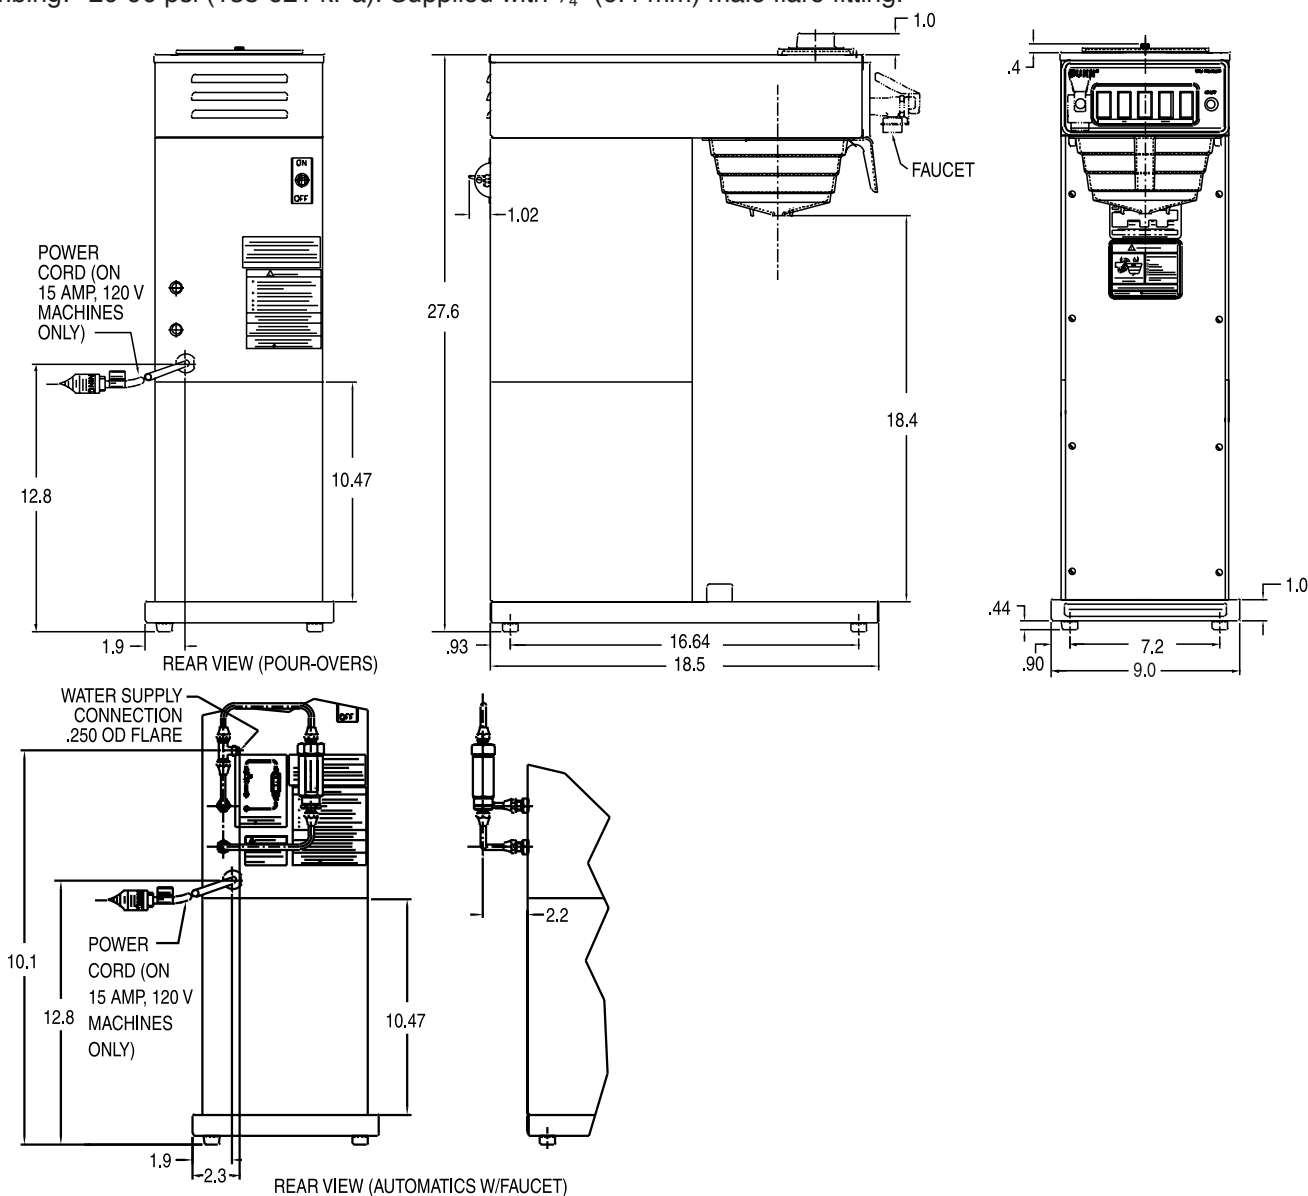

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.