

AXIOM™ Airpot Coffee Brewer



Model AXIOM-APS with Airpot

(Server sold separately) Dimensions: 23.6" H x 9" W x 18.5" D (59.9cm H x 22.9cm W x 47cm D)

Features

Axiom Airpot Coffee Brewer

- Brews 4.5 to 7.5 gallons (15.7 to 28.4 litres) of perfect coffee per
- For high lime areas, BrewLOGIC™ technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Convenient airpots keep coffee hot and fresh for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Brews directly into 1.9 to 3 liter airpots.
- Ensures coffee brew quality with cold brew lock out capability.
- Electronic diagnostics and built in tank drain make service easier.
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature control.
- Hot water faucet.
- SplashGard® funnel deflects hot liquids away from the hand.
- Energy-saver mode reduces tank temperature during idle periods.

Related Products

2.2 liter Push-Button Airpot

Product No.: 28696.6000 Capacity: 74 oz. (2.2 L)

2.5 liter Push-Button Airpot

Product No.: 13041.6000 Capacity: 84 oz. (2.5 L)

2.5 liter Lever-Action Airpot

Product No.: 32125.0000 Capacity: 84 oz. (2.5 L)

3.0 liter Lever-Action Airpot

Product No.: 32130.0000 Capacity: 102 oz. (3.0 L)

3.8 liter Lever-Action Airpot

Product No.: 36725.0000 Capacity: 129 oz. (3.8 L)



Easy Clear® EQ-17-TL

Product No.: 30200.1000 Dimensions:

12⁷/₁₆" H x 2¹/₂" W x 3" D (31.6 cm H x 6.35 cm W x 7.62 cm D)



Paper Filter Pack

Product No.: 20115.6000 Packed per case: 1,000 Dimensions:

41/4" Base x 23/4" Sidewall (10.8 cm Base x 6.98 cm Sidewall)



Easy Clear® ED-17-TL

Product No.: 30201.1001

Dimensions: 81/4" H x 25/16" Dia.

(20.95 cm H x 5.87 cm Dia.)



Model

AXIOM 15-APS

AXIOM 35-APS







Dimensions & Specifications




Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
AXIOM 15 APS (SS Trunk,Plastic Fo	38700.6017 unnel)	120	12.3	1425	1475	4.5 gal/17.1L	5.2/.15	36 /16.3	Yes
AXIOM 15 APS (SS Trunk, & Funne	38700.6018	120	12.3	1425	1475	4.5 gal/17.1L	5.2/.15	36 /16.3	Yes
AXIOM 35 APS (SS Trunk, & Funne	38700.6016 el)	120/240	14.6	3500	3500	7.5 gal/28.4L	5.2/.15	36 /16.3	No
AXIOM 35 APS (SS Trunk,Plastic Fu	38700.6019 unnel)	120/240	14.6	3500	3500	7.5 gal/28.4L	5.2/.15	36 /16.3	No
AXIOMP 35 APS (Pourover Feature,	38700.6044 SS Trunk, & Fu	120/240 nnel)	14.6	3500	3500	7.5 gal/28.4L	5.2/.15	37 /16.8	No

Brewing capacity: based upon incoming water temp of 60°F/15°C (140°F/60°C rise) per 1/2 gallon brew time of 4 minutes.

Electrical: If wired for 120V, requires 2-wires plus ground service rated 120V, single phase, 60 Hz. If wired for 120/208V or 120/240V, requires 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" male flare fitting.

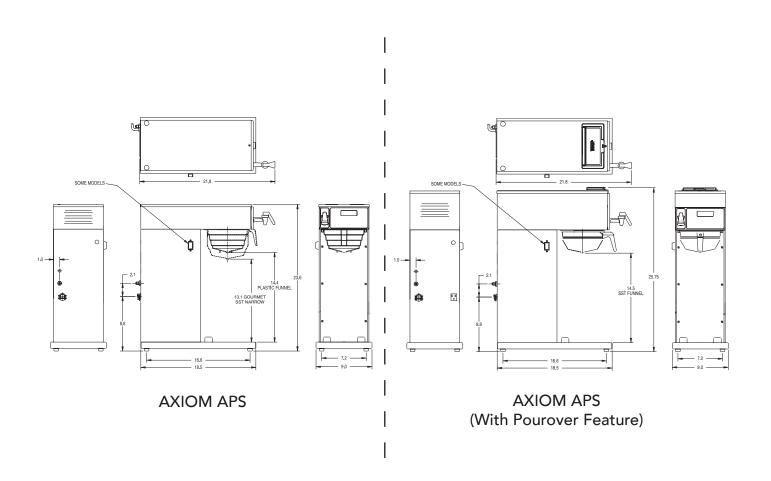

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.