

# Low Profile Pourover Coffee Brewer with 1 Warmer

ITEM#		
PROJECT		

DATE



### Features

#### **Low Profile Pourover Coffee Brewer**

- Brews 3.8 gallons (14.4 liters) of perfect coffee per hour.
- Pourover brewer requires no plumbing completely portable.
- · All stainless steel construction.
- · Stainless steel or black decor.
- · One warmer.
- SplashGard® funnel deflects hot liquids away from the hand.

#### Model VP17-1 BLK

(Decanter ot included)
Dimensions: 17.8" H x 8" W x 17.7" D
(45.2cm H x 21.6cm W x 44.96cm D)

For current specification sheets and other information, go to www.bunn.com.

## Related Products

Paper Filter Pack

Product No.: 20115.6000 Packed per case: 1,000

Dimensions:

 $4\frac{1}{4}$ " Base x  $2\frac{3}{4}$ " Sidewall 10.8 cm Base x 6.98 cm Sidewall



WX1-warmer

Product No.: 06450.6000 One position warmer



Easy Pour® black decanter

Product No.: 06100.0201 Quantity: 1 (also packaged in quantities of 3 & 24)



WX2-warmer

Product No.: 06310.6000

Two position warmer



Easy Pour® orange decanter (for decaf)

Product No.: 06101.0201 Quantity: 1 (also packaged in quantities of 3 & 24)



Model	Agency Listing	
VP17-1 SST	<b>®</b>	
VP17-1 BLK	ூ	

## Dimensions & Specifications






Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
VP17-1 SS	13300.6001	120	10.4	1150	1250	3.8 gal/14.4 liter	3 /.08	23 / 10.4	Yes*
VP17-1 BLK	13300.6000	120	10.4	1150	1250	3.8 gal/14.4 liter	3 /.08	23 / 10.4	Yes*

<sup>\*</sup>Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Models require 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: No plumbing needed.

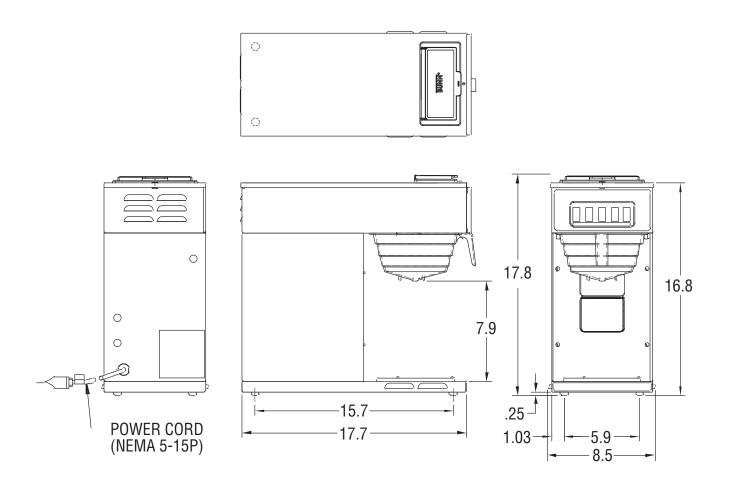

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com