

ITEM# \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_

## AXIOM™ 12 Cup Automatic Coffee Brewer

### Features

#### AXIOM™ Automatic Coffee Brewers

- Large 200 oz. (5.9 liter) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGIC™ technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology incorporates simplified programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion or pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Energy-saver mode reduces tank temperature during idle periods.
- Hot water faucet.



**Model AXIOM-15-3**  
(decanters sold separately)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

**Easy Clear® EQ-17-TL**  
Product No. : 30200.1000  
Dimensions:



**Easy Clear® ED-17-TL**  
Product No. : 30201.1001

**Paper Filter Pack**  
Product No. : 20115.6000  
Packed per case: 1,000  
Dimensions: 4 1/4" Base x 2 3/4" Sidewall  
10.8 cm Base x 6.98 cm Sidewall



**Easy Pour® black decanter**  
Product No. : 06100.0201  
Quantity: 1 (also packaged in quantities of 3 & 24)



**Easy Pour® orange decanter (for decaf)**  
Product No. : 06101.0201  
Quantity: 1 (also packaged in quantities of 3 & 24)



**WX1-warmer**  
Product No. : 06450.6000  
One position warmer



**WX2-warmer**  
Product No. : 06310.6000  
Two position warmer



#### Model

#### Agency Listing

AXIOM-15-3  
AXIOM-35-3



# Dimensions & Specifications



Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft <sup>3</sup> /m <sup>3</sup>	Weight lbs/kg	Cord Attached
AXIOM-15-3 <i>1 lower / 2 upper</i>	38700.6000	120	12.5	1150	1500	4.5 gal/17.1 liter	4/.113	30 / 13.6	Yes
AXIOM-35-3 <i>1 lower / 2 upper</i>	38700.6001	120/240	17.5	3500	3850	7.5 gal/28.4 liter	4/.113	30 / 13.6	No
AXIOM-15-3 <i>3 lower warmers</i>	38700.6004	120	12.5	1150	1500	4.5 gal/17.1 liter	4/.113	31 / 14.1	Yes
AXIOM-35-3 <i>3 lower warmers</i>	38700.6003	120/240	17.5	3500	3850	7.5 gal/28.4 liter	4/.113	31 / 14.1	No

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.


Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz.


120/240 volt models require 3-wires plus ground service rated 120/240V, single phase, 60 Hz.

An internal terminal block is configured for connection to a 3-wire plus ground.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting.

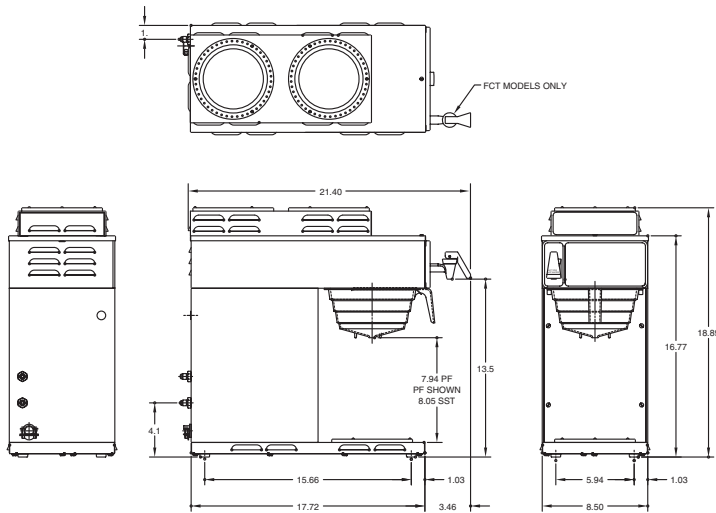

(1 Lower Warmer / 2 Upper Warmers)

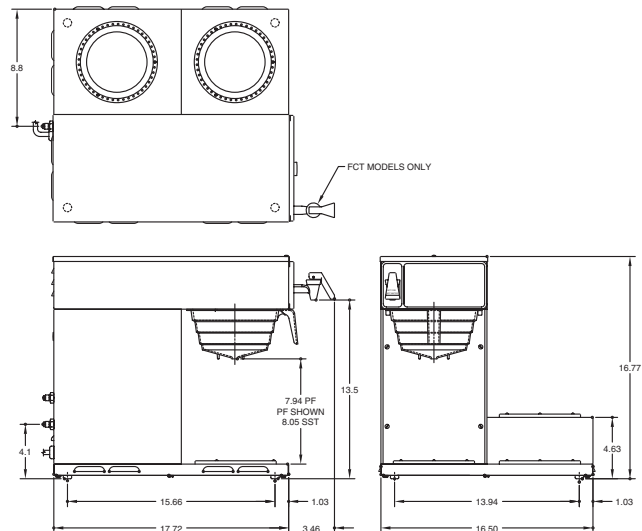

(3 Lower Warmers / Right)

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.