

H5X Element 5 Gallon (18.9 Liter) Hot Water Dispenser

Features

Providing accuracy, adjustability, energy efficiency and styling to our quality line of hot water equipment

- Digital thermostat provides consistent and accurate temperatures of 60°-212°F (15.6°-100°C).
- New contemporary, space-saving design.
- LED display provides simple temperature adjustment.
- Programmable "Energy Saver Mode" reduces operating cost during idle periods.
- Thinsulate[®] tank insulation provides increased energy efficiency.
- The perfect tool for added control over quality coffee and tea.



**Model H5X
Element**

Dimensions: 28.5"H x 7.1"W x 17.6"D
(72.4cm H x 18.03cm W x 44.7cm D)




Related Products

Easy Clear[®] EQHP-10

Product No. : 39000.0004

Easy Clear[®] EQHP-10L

Product No. : 39000.0001

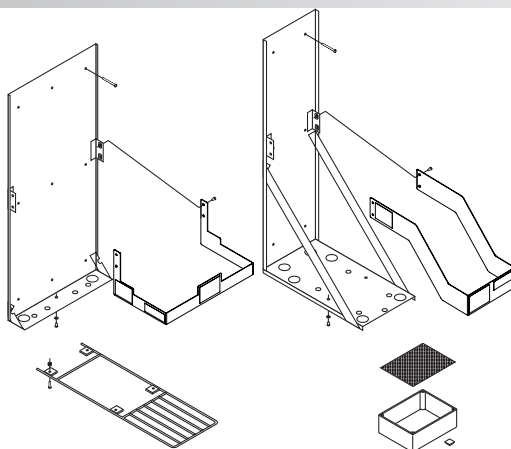

1. Wall Mount Bracket (side)

Product No. : 12542.0005

Dimensions: 30" H x 13 1/2" W x 4 1/2" D
76.2 cm H x 34.29 cm W x 11.43 cm D

2. Container Holding Shelf

Product No. : 12599.0000

Dimensions: 6 3/4" W x 21" D
17.15 cm W x 53.34 cm D

3. Drip Tray

Product No. : 02497.7998

Model

H5X Element

Agency Listing

Dimensions & Specifications

CANADA




Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Temp F°/C°	Capacity per hour		Cubic ft ³ /m ³	Weight lbs/kg
							cold 35°	hot 140°		
H5X-Element SST	43600.6006	120	12.5	1500	1500	212/100	3.7/ 14	8.1/ 31	4.1/.116	32/14.5
H5X-Element SST	43600.6002	208	19	4000	4000	212/100	7.3/ 27.6	14.7/ 55.6	4.1/.116	32/14.5
H5X-Element SST	43600.6003	240	16.7	4000	4000	212/100	7.3/ 27.6	14.7/ 55.6	4.1/.116	32/14.5
H5X-Element SST	43600.6008	208	28.8	6000	6000	212/100	9.9/ 37.5	18.6/ 70.4	4.1/.116	32/14.5
H5X-Element SST	43600.6010	240	25	6000	6000	212/100	9.9/ 37.5	18.6/ 70.4	4.1/.116	32/14.5
H5X-Element Black	43600.6017	208	19.5	4000	4000	212	7.3/ 27.6	14.7/ 55.7	4.1/ .116	32/14.5

Electrical: All models require 2-wires plus ground service, single-phase. Supplied strain relief on rear side of machine.

120V dispensers are supplied with NEMA 5-15P Plug and Cord.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" (6.3 mm) OD male flare fitting.

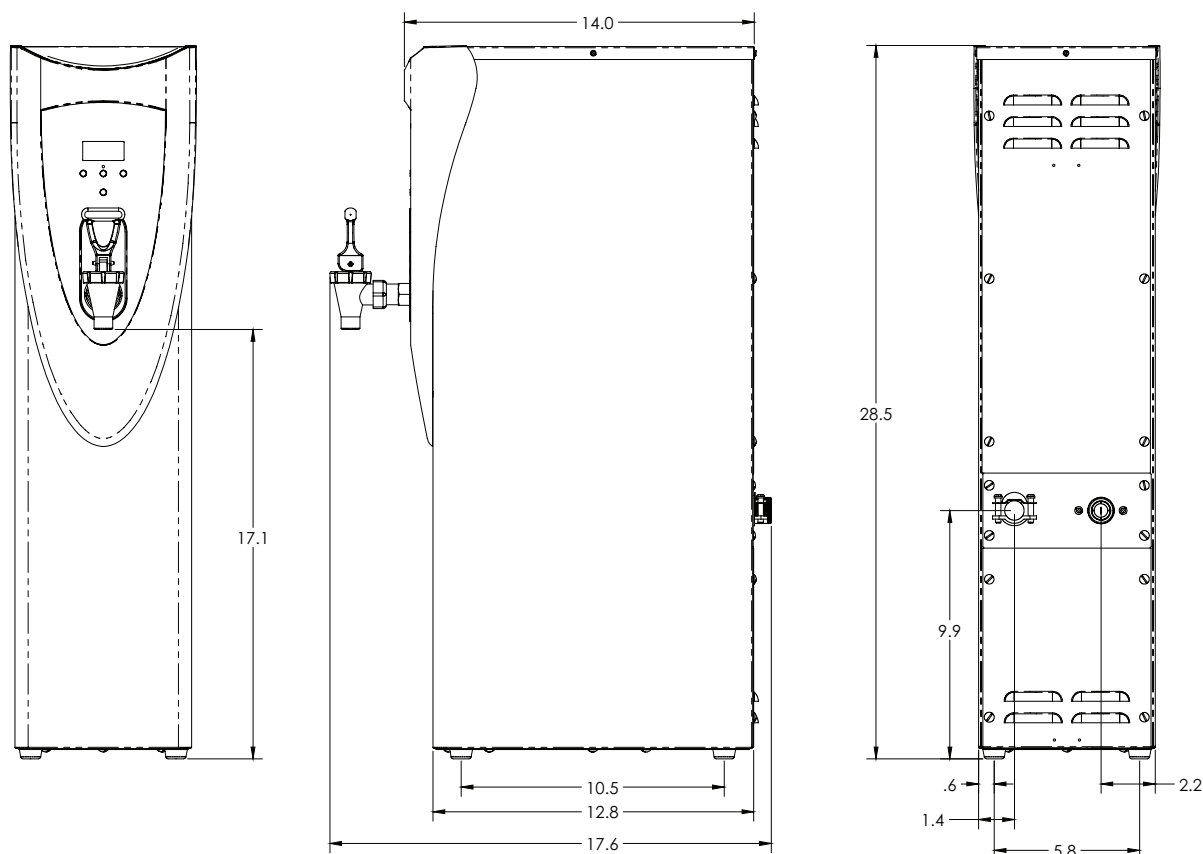

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

1/16 © Bunn-O-Matic Corporation