


## INSTRUCTIONS FOR USE – SCT-0816 – Digital Intermediate Pressure Gauge, Travel



### INSTRUCTIONS FOR USE:

- The instrument is powered by 2x AAA batteries. They can be installed by removing the cover at the back of the instrument. For the long time storage, we recommend removing the batteries from the instrument.
- The unit connects to a standard female BCD hose coupler.

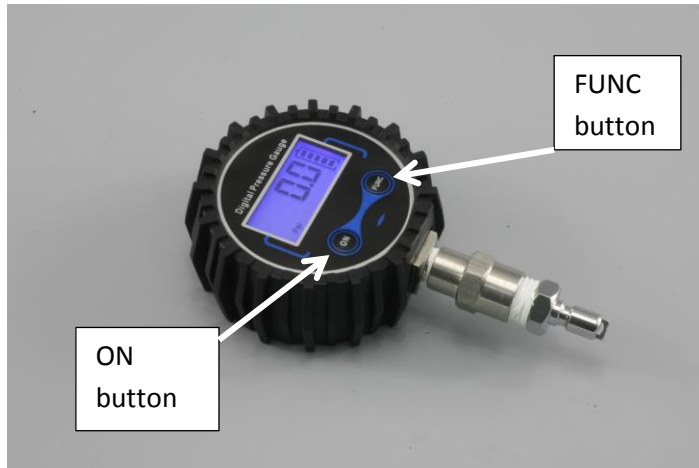

- To turn on, either press the “ON” button, or connect the gauge to a pressurised BCD hose.
- To turn the instrument off, press the “ON” button and hold for 1 second.
- To change units, press the “FUNC” button. The units available are PSI, kPa, bar, Kg/cm<sup>2</sup>.
- The backlight switched itself off after 1 minute. To reactivate the backlight, press the “FUNC” button (this goes hand in hand with a change of units).
- The unit has an auto switch off function after 2 ½ minutes when the instrument is not pressurised. If the unit is pressurised it will not auto switch off.

- If the maximum pressure of the unit is exceeded (200 PSI / 13.5 bar), an error message “OP” appears on the screen. Immediately remove the excessive supply pressure from the instrument. Pressurising the instrument beyond the pressure limits could damage the unit or cause bodily harm. Please note that the unit is not fitted with an over pressure relief valve.

**SAFETY WARNING:**

When If the following safety warnings are not observed, serious injury or death could occur.



- Never exceed the pressure rating of the instrument, 200 PSI / 13.5 bar.
- The components of this assembly are suitable for AIR use only, they are not suitable for Nitrox or Oxygen use.