

UNDER SINK RO

The SPECTRUM Z1 combines sleek design with outstanding functionality, making it an ideal choice for both residential and light commercial water filtration. Its compact, easy-to-use setup features twist-and-click cartridge loading and push-fit connections, ensuring quick installation and hassle-free maintenance.

Equipped with cartridge change monitors and auto-flush settings, the Z1 keeps your system performing at its best, ensuring consistent, high-quality water. It comes complete with all the necessary fittings, including an isolation valve, tubing, connections, and a stylish brushed stainless-steel tap.




FEATURES & BENEFITS

- Push-fit connections for simple installation
- Cartridge change monitors
- Twist-and-lock cartridge loading
- Auto-flush settings to maintain quality
- All fittings included

TECHNICAL DATA

Operating Temperature (°C)	5-38
Minimum Feed Pressure (bar)	1
Feed Water Source (ppm)	<500
Recovery	65
Nominal Salt Rejection (%)	93
Voltage	220 VAC 50 Hz
Maximum Feed Water Turbidity (NTU)	<1

DIMENSIONS

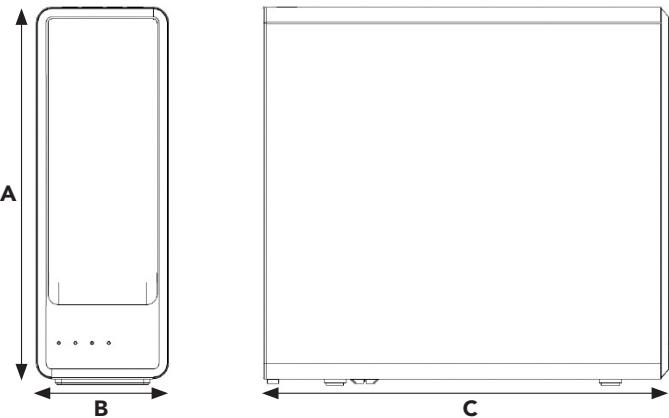

Dimensions (mm)			
Code	A	B	C
Z1-E020	376	130	397

Port Size (")		
Feed	Permeate	Concentrate
3/8	1/4	1/4

COMPONENTS

- Z1-E020 RO System
- Z1-E020 3-in-1 pre-post filter
- Z1-E020 RO membrane
- Power Transformer
- Inlet 3-way isolation valve
- Drain saddle & connector
- Brushed stainless steel tap and connector
- Tubing: 1.5m x 3/8" white
3m x 1/4" white

PERFORMANCE

FLOW RATE

Code	LPH (m³/day)	Avg Rejection (%)
Z1-E020	120 (2.88)	@ 93

ORDERING GUIDE

Code	Range	System Size
Z1 	E 	020

i.e Z1-E020

ASSOCIATED PRODUCTS

The below products have often been associated with this product.



REPLACEMENT CARTRIDGE
Z1-E020-C



REPLACEMENT CARTRIDGE
Z1-E020-M