

ProMac Series

FORK & FRAME ASSEMBLIES

**A New Generation of Quality Attachments
From the Name You Trust!**



ProMac 10



ProMac 15



ProMac 40



ProMac 10
w/MacGrab



ProMac 20 & 26

MADE IN USA







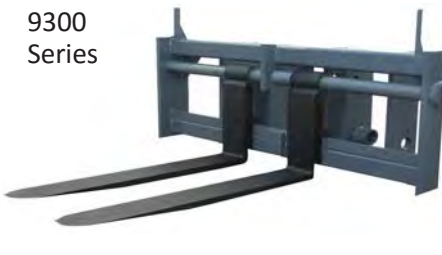

- Telescopic Material Handlers • Wheel Loaders • Backhoe Loaders
- Ag Loaders • Compact Wheel Loaders • Track Loaders



800-821-7563

16000 W. 108th Street, Lenexa, KS 66219
Phone (913) 495-4800 • FAX (913) 227-0523
E-mail: sales@ArrowMHP.com
or visit: ArrowMHP.com

ProMac Frames & Forks

ProMac 10 Frames & Forks	ProMac 10 with MacGrab Frame & Forks w/Grapple	ProMac 15 Frame & Forks
<p>6200 ITA III 6300 Series</p>  <p>Heavy Duty 10,000 lb. Capacity Fits: Tractor Loaders, Wheel Compact Loaders, Telehandlers, Loader Backhoes</p> <ul style="list-style-type: none"> • Shaft or ITA Rail Mount • High Carbon, high strength forks • Optional floating or non-swing forks 	<p>6300G Series</p>  <p>Supplied with 48" Forks and Grapple Arms</p> <ul style="list-style-type: none"> • Dual flow control valves to adjust arm closure speed • 3,000 PSI hydraulic system • Heavy duty frame & high strength alloy steel forks • Also available with single arm that closes to 12" 	<p>7200 ITA IV Series</p>  <p>Heavy Duty 15,000 lb. Capacity Fits Small Wheel Loaders</p> <ul style="list-style-type: none"> • ITA Rail Mount • High strength alloy steel forks
ProMac 20 & 26 Frame & Forks	ProMac 40 Frame & Forks	Frames are available for most couplers or direct pin on mounts
<p>7300 & 8300 Series</p>  <p>Heavy Duty 20,000 or 26,000 lb. Capacity Fits Very Large Wheel Loaders</p> <ul style="list-style-type: none"> • Shaft Mount • High strength alloy steel forks • Optional floating or non-swing forks 	<p>9300 Series</p>  <p>Heavy Duty 40,000 lb. Capacity Fits Very Large Wheel Loaders</p> <ul style="list-style-type: none"> • Shaft Mount • High strength alloy steel forks • Optional floating or non-swing forks 	<ul style="list-style-type: none"> • INCLUDES ARROW'S HIGH STRENGTH ALLOY STEEL FORKS • Heavy duty unitized steel construction • Frame widths from 48" to 120" inches • Load capacity is rated at 24" load center • Easily adjustable fork spread • Available from stock or within 14 days • Optional floating forks • Designed for maximum visibility • Fork lengths from 28" to 128" inches • Optional fork grapples • Optional hydraulic fork positioning 

ASPS15258