

CAMSO 4L 13



TELEHANDLERS



WHEEL
LOADERS



MINI-
DUMPERS



A SMOOTH RIDE WITH ENHANCED TRACTION

Provides exceptional versatility and durability in both on- and off-road applications. Reduces vibrations for enhanced driving comfort while providing excellent traction in off-road conditions.

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO 4L I3



VERSATILE DIRECTIONAL TREAD PATTERN WITH CENTER BLOCK

- Reduces vibrations and enhances driving comfort

HAULER STEPPED TREAD DESIGN

- Maximizes tread cleanout in off-road conditions for improved traction

OPEN SHOULDER TREAD DESIGN

- Provides excellent traction in off-road conditions


HEAVY-DUTY CARCASS

- Provides excellent stability and side impact resistance

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	APPLICATION	MAXIMUM TIRE LOAD [lb]							
											On other vehicles					On counterbalanced lift trucks		
		Recom-mended	Alterna-tive	O.D. [in]	O.W. [in]	O.T.D. [32nd]					Inflation pressure [PSI]	Creep	6 mph	9 mph	30 mph	Inflation pressure [PSI]	Load wheel	Steering wheel
10.0/75-15.3	8	9 x 15.3	-	31.4	10.4	37	119	A8	R-4	FREE	45	4950	4200	3990	2700	61	4300	3600
				31.4	10.4	37	106			DRIVE	45	4950	2935	2785	1885	61	4300	3600
11.5/80-15.3	10	9 x 15.3	-	33.3	11.6	31	131	A8	R-4	FREE	49	7100	6020	5720	3870	68	6150	5150
				33.3	11.6	31	119			DRIVE	49	7100	4200	3990	2700	68	6150	5150
10.5-18	10	9x18	9SDC	35.1	10.6	31	126	B	R-4	-	54	9400	6750	6200	4200	64	6750	5650
12.5-18	12	11x18	11SDC 12SDC 12	38.9	13.2	28	131	B	R-4	-	50	10750	-	-	7050	61	7750	6450
10.5-20	10	9x20	9SDC	37.4	10.9	28	128	B	R-4	-	54	9950	3240	2970	4450	61	7150	5950
12.5-20	12	11x20	11SDC 12SDC 12	41.5	13.7	29	132	B	R-4	-	50	11050	3600	3300	4950	61	7950	6600
14.5-20	14	11x20	11SDC 12SDC 12	43.6	14.1	34	138	B	R-4	-	50	13000	4250	3895	5850	61	9400	7800
405/70-20 (16/70-20)	14	13x20	13SDC	42.6	17.4	33	154	A8	R-4	FREE	50	13650	5250	4990	7450	79	11850	9950
				1.7	0.7	33	142			DRIVE	50	13750	3710	3525	5250	79	11850	9950
405/70-24 (16/70-24)	14	13x24	13SDC	46.8	16.6	34	156	A8	R-4	FREE	50	14550	5600	5320	7950	64	12650	10600
				46.8	16.6	34	144			DRIVE	50	14550	3920	3725	5550	64	12650	10600

IMPACT RISK FACTOR

Impact risk factor is calculated based on the carcass resistance and the lug/void ratio

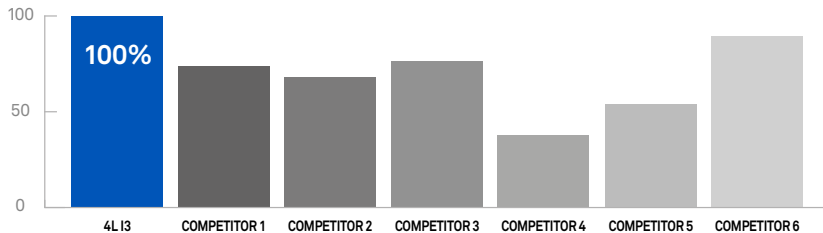

The Camso 4L I3 shows the **highest resistance to impact** based on the optimized lug-to-void ratio and the carcass resistance when compared to 6 competitors on the 405/70-20. Having the lowest impact risk factor means that our tire is the most resistant and runs a lower risk of having a flat tire.



FACTORY AUTHORIZED DISTRIBUTOR:

BOLTZ EQUIPMENT, INC.
 JACKSONVILLE, FLORIDA USA
 TOLL FREE USA/CANADA: +1 (888) 955-9779
 INTERNATIONAL DIRECT: +1 (904) 232-4448
 EMAIL: SALES@BOLTZEQUIPMENT.COM
 WEB: BOLTZEQUIPMENTPARTS.COM



FORMERLY CAMOPLAST SOLIDEAL