

Make: FORD

Model: 2013-2014 Focus ST

Application: Light Plate

PACKAGE CONTENTS			TOOLS
QTY		QTY	
1 4 4 4 4	Light Plate Assembly 5/16" - 18 x 1.25" Buttonhead Screw 5/16" - 18 Hex Nut 5/16" USS Flat Washer 5/16" Lock Washer 1/2" Flat Washer		1/2" Socket or Wrench 3/16" Hex Key 3/8" Drill Bit Bumper removal tools

INSTALLATION INSTRUCTIONS




Detach hood release cable and remove front bumper.




Align light plate to grill as shown above. Take note of lhole locations with respect to grill hexes.

2

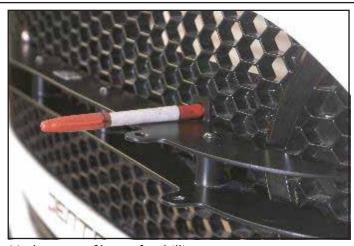

Mark center of hexes for drilling.

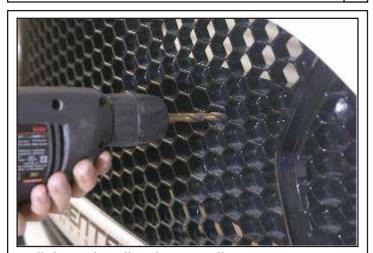

Drill through grill with 3/8" Drill Bit.

4

3

1

DISCLAIMER FOR RALLY INNOVATIONS PRODUCTS: Buyers assume all risk and liability whatsoever for the installation and the use of Rally Innovations products. Rally Innovations products are sold as decorative accessories and should not be relied upon as protection for the vehicle or occupants in the event of a collision or roll over. Vehicles equipped with a supplemental restraint system (air bag) deployed by impact should not be modified by any aftermarket Light Bar or Skid Guard without first consulting the vehicle manufacturer. Rally Innovations, a subsidiary of Pentech Automotive assumes no liability for injury, loss, incidental or consequential damages in the event of a collision or roll over.



Insert 5/16" Buttonhead Screws through tabs and grill.



Fasten with 1/2" Flat Washer, 5/16" Flat Washer, 5/16" Lock Washer, and 5/16" Hex Nut on each bolt. Tighten all hardware.



Reinstall front bumper cover. Recommend mount and wiring lights prior to re-installation.



8

5