




MAKE: SUBARU
 MODEL 1993-2001 Impreza RS
 PART: Rally Light Bar

PACKAGE CONTENTS						TOOLS	
QTY		QTY		QTY			
1	Rally Light Bar	6	3/8" Nut	2	1/4" Washer	Ratchet	
2	Mounting Brace	2	5/16" Bolt Plate			9/16" Wrench	
1	License bracket	2	5/16" FlatWasher			9/16" Socket	
2	M8 x25mm Hex Bolt	2	5/16" Lock Washer			1/2" Wrench	
2	3/8" - 16 x 1" Hex Bolt	2	5/16" Nut			1/2" Socket	
2	3/8" - 16 x 1.5" Hex Bolt	2	Nylon Spacer - 3/8" long			15mm Socket	
2	3/8" - 16 x 1 3/4" Hex Bolt	2	1/4" x1" Lag Screw				
4	3/8" Split Lock Washer	2	*Nylon Spacer - 3/4" long				
12	3/8" Flat Washer	2	*1/4" x1.5" Long Lag Screw				


*-Addendum See Page 2

INSTALLATION INSTRUCTIONS




Attach (1) fog/driving light base to the light bar using (1) 3/8"-16x 1 3/4" hex bolt and (1) 3/8" nut, per side. (PIAA light bracket shown, not included)

1

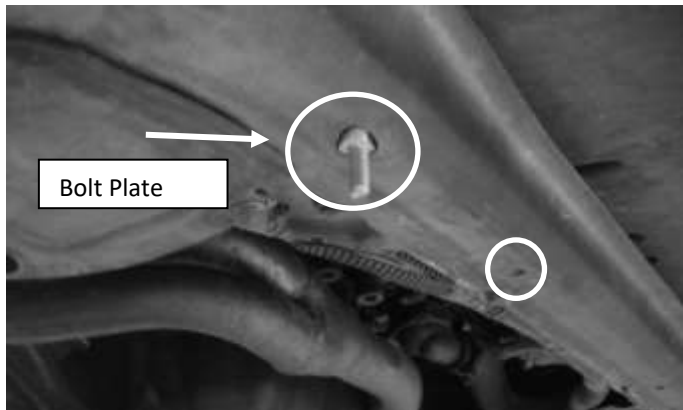


Locate the two holes in the lower radiator support, and place the 5/16" bolt plate into the non-threaded hole [Passenger side shown]

2

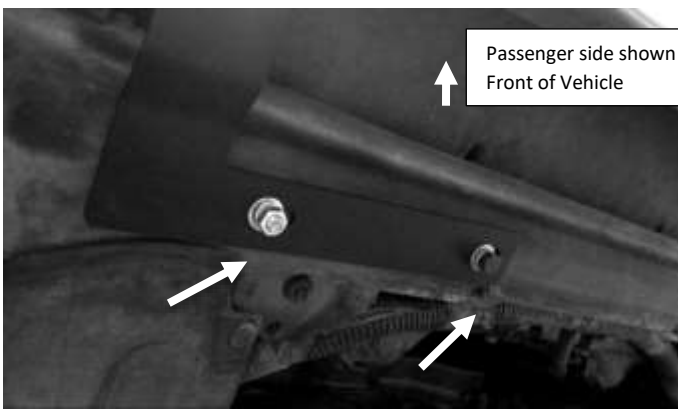

Attach the mounting bracket to the car using the M8-1.25 x 25mm bolt, and (1) 5/16 flat washer, (1) 5/16 lock washer, and (1) 5/16 nut fastened on the bolt plate.

3



Attach the license plate bracket on the front of the bumper with the factory license plate screws (or provided 1" screws)

Note: 1998 Impreza Bumper Shown (See Page 2 for Addendum)

4



Attach the rally light bar using (1) 3/8"-16 x 1.5" bolt, (1) 3/8" nylon spacer, (2) 3/8" flat washer, (1) 3/8" lock washer, and (1) 3/8" nut on each tab. **Note:** Assemble loosely to allow adjustments.

5



Attach the light bar to mounting bracket using (1) 3/8"-16x 1" hex bolt, (2) 3/8" flat washer, (1) 3/8" lock washer, and (1) 3/8" nut for each side. **Note:** Tighten all 3/8" bolt to 32 ft-lbs. Tighten M8 bolt to 19 ft-lbs.

6

Addendum: Light Bar Installation Instructions - License Plate Fastener

MODEL: 1999-2001 Impreza 2.5RS (Ver. 6 Bumper)

Provided Mounting Hardware



3/4" Spacer



1/4" x 1.5" Lag Screw

A nylon spacer and longer license plate screw is required for the version 6 bumper for correct fitment. The nylon spacer will sandwich between the license plate bracket and the bumper as shown.

