

Make: Subaru

Model: 2015-2016 Impreza

Application: Fog Light Conversion

PACKAGE CONTENTS					TOOLS	
QTY		QTY		QTY		
2	Light Conversion Bracket				7/16" Socket/Wrench	
2	1/4"-20 x 3/4" Hex Bolt				10mm Socket/Wrench	
8	1/4" Flat Washer				5/32" Hex Key	
2	1/4" Split Lock Washer				Panel Removal Tool	
2	1/4" Hex Nut				Philips Screwdriver	
					Wire Crimper	

INSTALLATION INSTRUCTIONS

Remove factory fasteners securing the splash guard to gain access to the fog light area.

1

Unplug the factory fog light.

2

Remove the light by unfastening the 10mm head bolt and plastic screw shown above.

3

Assemble the light and light conversion bracket together.


4

DISCLAIMER FOR RALLY INNOVATIONS PRODUCTS: Buyers assume all risk and liability whatsoever for the installation and the use of Rally Innovations products. Rally Innovations products are sold as decorative accessories and should not be relied upon as protection for the vehicle or occupants in the event of a collision or roll over. Vehicles equipped with a supplemental restraint system (air bag) deployed by impact should not be modified by any aftermarket Light Bar or Skid Guard without first consulting the vehicle manufacturer. Rally Innovations, a subsidiary of Pentech Automotive assumes no liability for injury, loss, incidental or consequential damages in the event of a collision or roll over.




Remove fog bezel from the bumper. Use a Panel Removal Tool, if necessary, to gently pry on the bezel fingers behind the front bumper to displace it from its location.

5

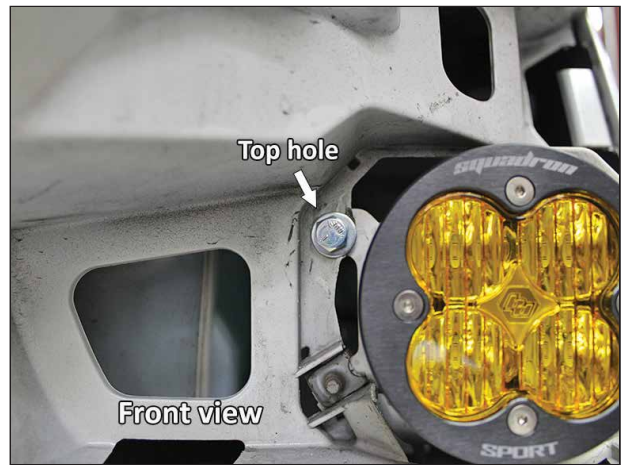


Install new light assembly using the same mounting points as the original. Fasten the top hole (shown above) with (1) 1/4"-20x 3/4" Hex Bolt, (2) 1/4" Flat Washer, (1) 1/4" Split Lock Washer, and (1) 1/4"-20 Hex Nut.

6

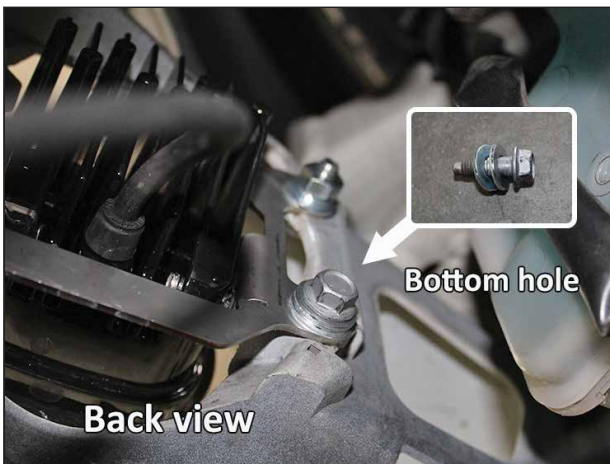

For the bottom hole, reinstall the factory 10mm head bolt with (2) 1/4" Flat Washers.

7

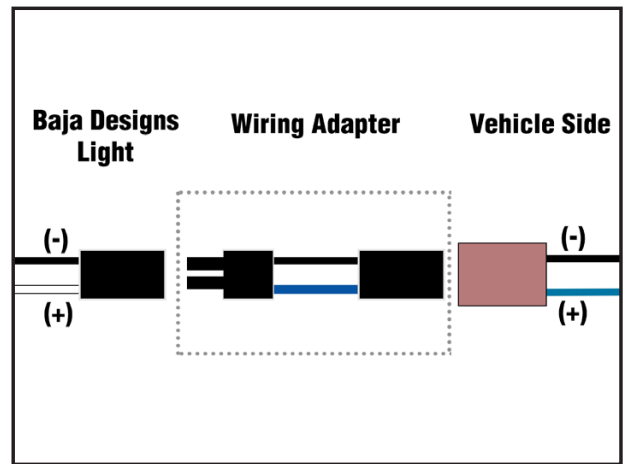

The wiring adapter installs between the vehicle harness and the light like shown above. The (-/+) on the light should coincide with the (-/+) on the vehicle harness and vice versa. Note: The -/+ on the light is black/white.

8



Reinstall the fog light bezel & splash guard and repeat steps on the opposite side fog light.

9



Completed assembly shown.

10