

Make: Subaru

Model: 2008-2011 Impreza/OBS  
2008-2014 STI/WRX

Application: Rally Light Bar


PACKAGE CONTENTS				TOOLS
QTY		QTY		
1	Rally Light Bar	2	3/8"-16 x1.75" Hex Bolt	Flathead Screwdriver 9/16" Wrench/Socket 7/16" Wrench/Socket Sharp Cutting Tool
1	Lower Mounting Brace	7	3/8"-16 Hex Nut	
1	License Plate bracket	11	3/8" Flat Washer	
1	3/8" USS Flat Washer	5	3/8" Lock Washer	
2	3/8" Bolt Plate	2	1/4" Lag Screw	
5	3/8"-16 x 1" Hex Bolt	2	1/4" Flat Washer	

## INSTALLATION INSTRUCTIONS



Remove the plastic Splash Guard.  
**Turbo models:** Insert (2) 3/8" Bolt Plates into the slots shown.

1

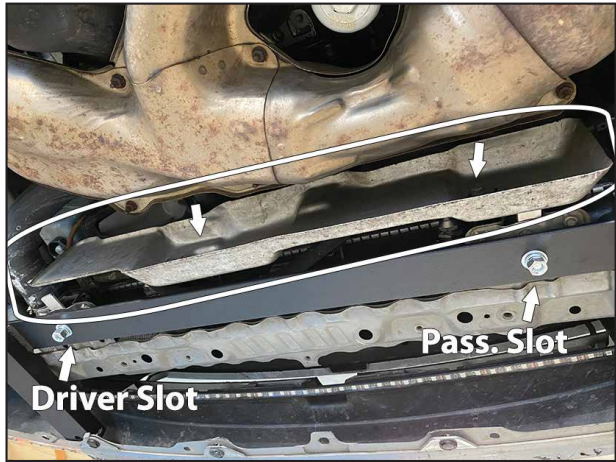

**Non-turbo models:** Remove heatshield using a 10mm socket wrench to unfasten the (2) screws indicated by the arrows. Insert (1) 3/8" Bolt Plate into driver side slot and (1) 3/8"-16 x 1" Hex Bolt with a (1) 3/8" USS Flat Washer (large size Flat Washer) into the passenger side slot.

2



Attach Lower Brace with (1) 3/8" Flat Washer, Lock Washer, and Hex Nut per side. Do not tighten yet - allow the brace to move freely from front-back along the slots.

3



Attach Light Bar with (1) 3/8"-16x1" Hex Bolt, (1) 3/8" Lock Washer, and (1) 3/8" Flat Washer per side.

4

DISCLAIMER FOR RALLY INNOVATIONS PRODUCTS: Buyers assume all risk and liability whatsoever for the installation and the use of Rally Innovations products. Rally Innovations products are sold as decorative accessories and should not be relied upon as protection for the vehicle or occupants in the event of a collision or roll over. Vehicles equipped with a supplemental restraint system (air bag) deployed by impact should not be modified by any aftermarket Light Bar or Skid Guard without first consulting the vehicle manufacturer. Rally Innovations, a subsidiary of Pentech Automotive assumes no liability for injury, loss, incidental or consequential damages in the event of a collision or roll over.




Locate (2) license plate holes on the front bumper, as shown above.

5



Attach License Plate and License Plate Bracket to the front bumper cover with (1) 1/4" Lag Screw and (1) 1/4" Flat Washer, per hole.

6

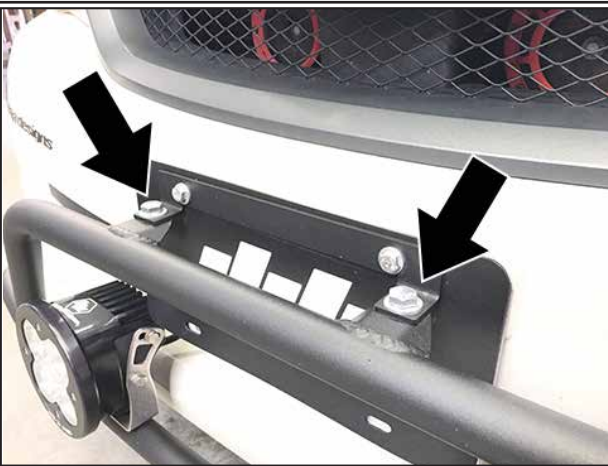


**08-10 STI:** Attach Light Bar to License Plate Bracket with (1) 3/8"-16x1" Hex Bolt, (2) 3/8" Flat Washers, (1) 3/8" Lock Washer, and (1) 3/8" Hex Nut, per side. **Note:** License Plate Bracket flanges are on top of the bar flanges.

7



**All other models:** Attach Light Bar to License Plate Bracket with License Plate Bracket flanges under the bar flanges.

8

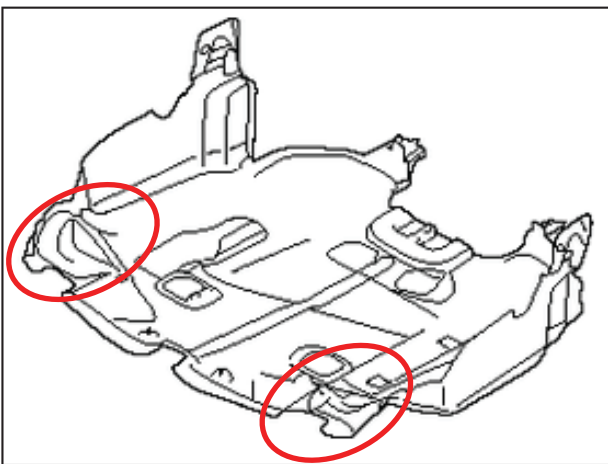

Trim the indicated areas of the plastic Splash Guard to clear the light bar.

9



Go back and tighten the lower brace hardware and reinstall the heatshield (for non turbo models).

Completed assembly shown. (2010 WRX pictured)

10