

◆ SPECIFICATIONS


|                            |                                      |
|----------------------------|--------------------------------------|
| PPF:                       | > 2160 μmol/s                        |
| Efficacy:                  | > 3 μmol/J                           |
| Input Power:               | 720 W                                |
| Power Factor:              | ≥ 96%                                |
| Fixture Dimensions/Weight: | 57"L x 45.5" W x 5.30" H / 43.63 lbs |
| Mounting Height:           | > 6" (15.2cm) Above Canopy           |
| Lifetime:                  | L90 : > 54,000 hrs                   |
| Warranty:                  | 5 Years Standard Warranty            |
| Input Voltage:             | Autosensing 100-277 V~               |
| Amp Draw:                  | 120V/6.23A, 240V/3.09A, 277V/2.71A   |
| Group Control:             | YES                                  |

◆ FEATURES


- Ture 5' wide fixture
- Group Control
- External Controllability
- 4 Adjustable Spectrum Channels
- Plug and Play
- On-board Dimming
- Outstanding Efficacy

◆ MODEL-H PLUS 5'

Tested at 6" / Tested at 12"

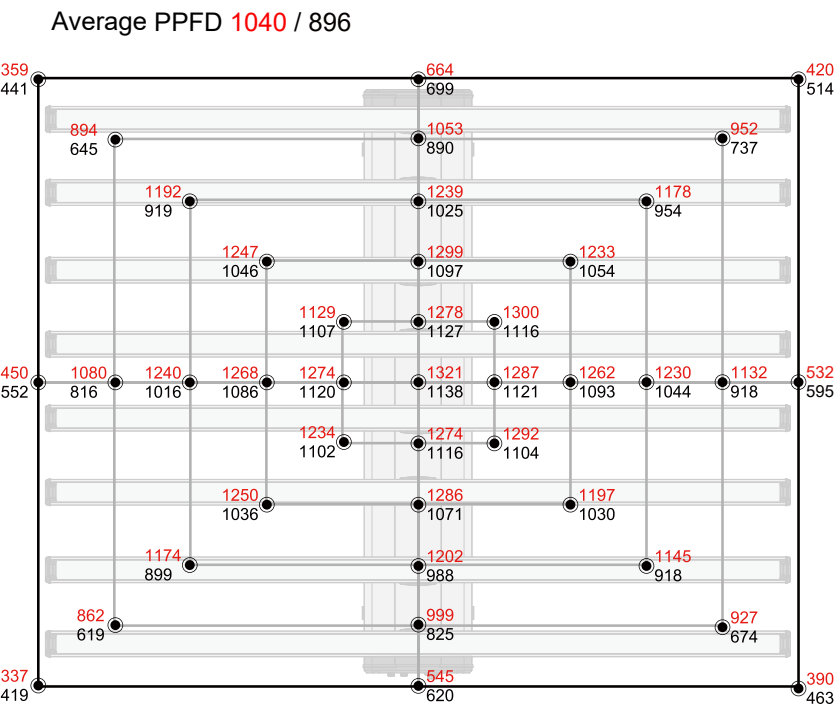


◆ DIMENSIONS

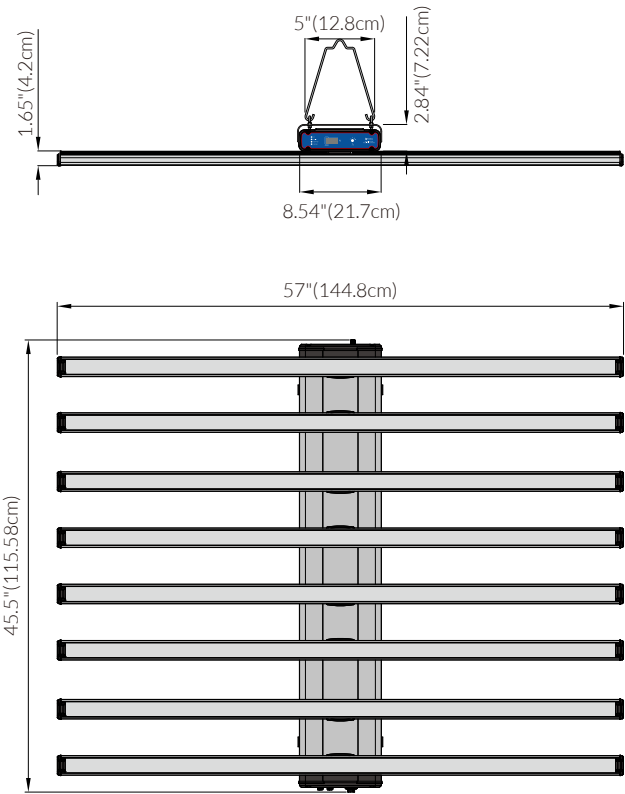


◆ SPECTRUM


Efficacy: 3 μmol/J

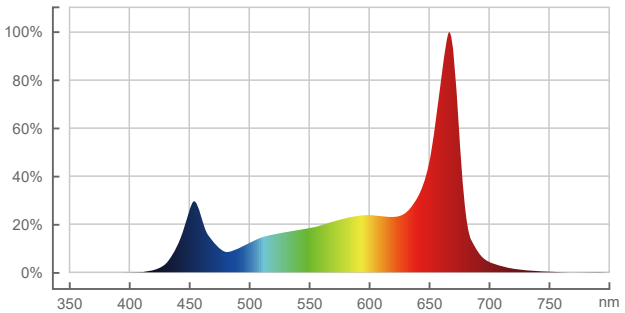

Efficacy: 2.9 μmol/J

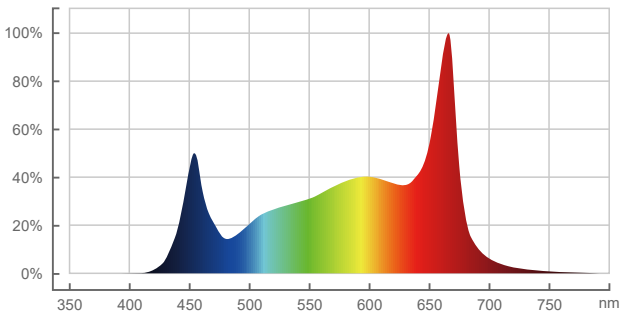

Efficacy: 2.8 μmol/J

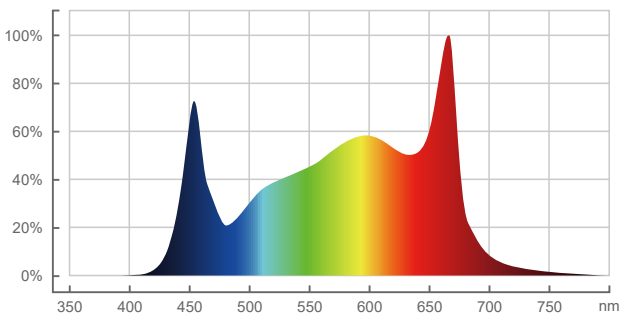



MODEL-H PLUS 5' (480V)

LED Grow Light

◆ SPECIFICATIONS


|                            |                                      |
|----------------------------|--------------------------------------|
| PPF:                       | > 2160 μmol/s                        |
| Efficacy:                  | > 3 μmol/J                           |
| Input Power:               | 720 W                                |
| Power Factor:              | ≥ 96%                                |
| Fixture Dimensions/Weight: | 57"L x 45.5" W x 5.30" H / 43.63 lbs |
| Mounting Height:           | > 6" (15.2cm) Above Canopy           |
| Lifetime:                  | L90 : > 54,000 hrs                   |
| Warranty:                  | 5 Years Standard Warranty            |
| Input Voltage:             | Autosensing 347-480 V~               |
| Amp Draw:                  | 2.09A@347V, 1.55A@480V               |
| Group Control:             | YES                                  |

◆ FEATURES


- Ture 5' wide fixture
- Group Control
- External Controllability
- 4 Adjustable Spectrum Channels
- Plug and Play
- On-board Dimming
- Outstanding Efficacy

◆ MODEL-H PLUS 5' (480V)

Tested at 6" / Tested at 12"

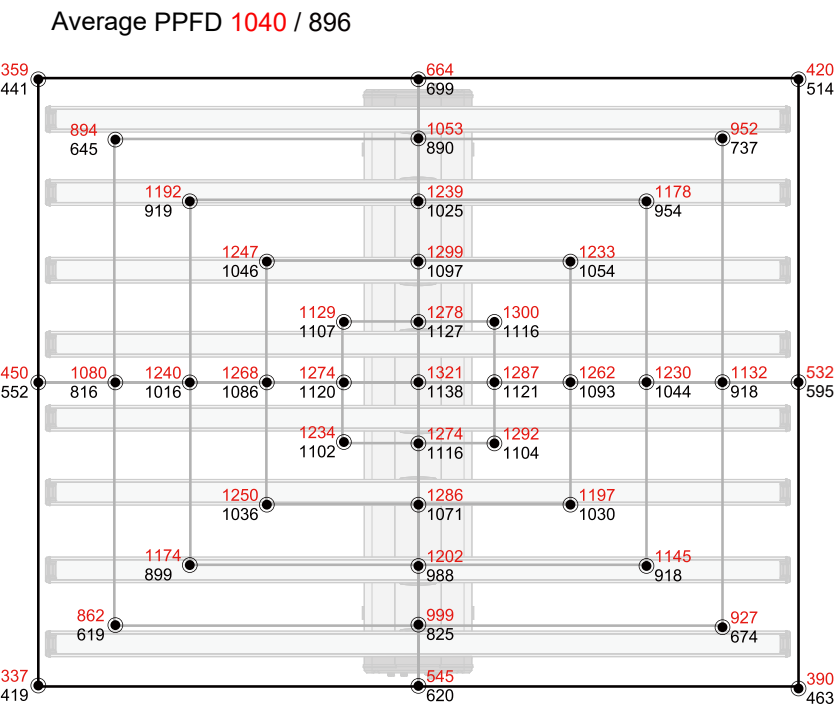


◆ DIMENSIONS

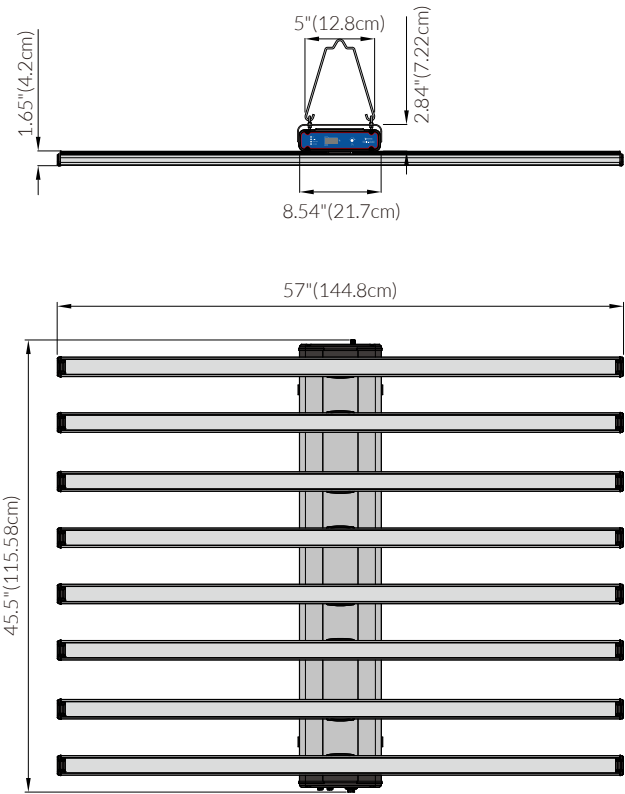


◆ SPECTRUM

Efficacy: 3 μmol/J

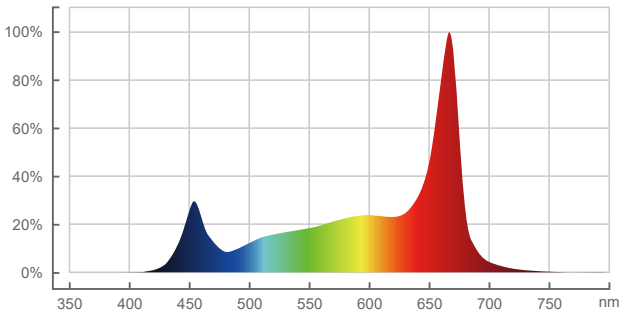

Efficacy: 2.9 μmol/J

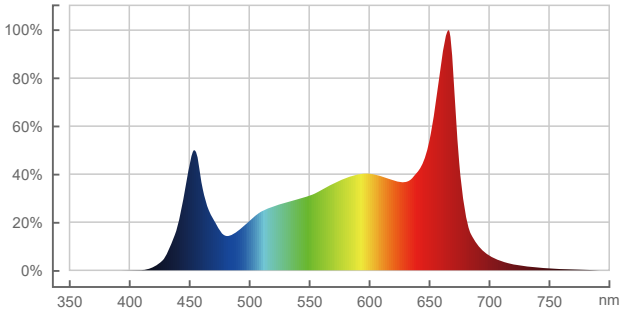

Efficacy: 2.8 μmol/J

