

NRS11-320

Hibit Display Line Voltage Luminaire with Slim Canopy

Lamp: (1) 20W-50W lensed GU10 120V MR16 (included)

PRODUCT DESCRIPTION

Low voltage MR16 luminaire with tapered back. Luminaire has an arched stem extending from canopy, allowing full aiming and 360° rotation for display lighting.

SPECIFICATION

HOUSING

0.07" die-cast aluminum lampholder is perforated for proper heat dissipation. The housing is provided with an aiming adjustment handle for ease of aiming.

STEM

Material: 0.07" die-cast aluminum.

ELECTRICAL

WIRING

Size: 18 Gauge AWG 200°C, 300V

SOCKET

Porcelain socket rated for 120V lamp.

UNIVERSAL CONNECTOR

Construction: 0.07" die cast aluminum shell

Contacts: Copper for positive and neutral Copper contact spring on top to provide solid contact with ground conductor located on top of rail.

FINISHES

Brushed Nickel, Bronze, and Silver are available.

LABELS AND LISTINGS

UL and cUL Listed for dry location only.

NORALIGHTING.


Type

Project

Catalog No.

Lamp/Wattage

DIMENSIONS

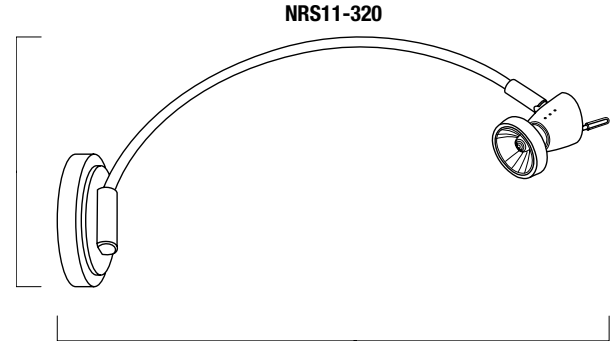

Height : 10"
Max. Extension : 17-3/4"



Hibit Display Line Voltage Luminaire with Slim Canopy

Catalog No.	Finish
NRS11-320	BN = Brushed Nickle BZ = Bronze S = Silver

Create a complete item number: Example: NRS11-320BN

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2014