

NRS34-450

Rail Mounted Pendant Cord Fixture

Low Voltage Pendant

Lamp: (1) 20-50W 12V lensed MR-16 (not included).

NORALIGHTING.

Type

Project

Catalog No.

Lamp/Wattage

PRODUCT DESCRIPTION

Die cast lamp holder with cylinder shaped frosted glass shade. Fixture provides ambient light. Luminaire has small stem extending from rail connector.

SPECIFICATION

HOUSING

Top neck of porcelain socket holds a die cast ring. Accepts any custom glass or decorative element with 7/8" opening (Ordered Separately).

STEM

Material: die-cast aluminum 0.07".

ELECTRICAL

WIRING

Size: 18 gauge AWG, 105°C, 300V.

SOCKET

Porcelain socket rated for 50W 12V lamp max.

TRANSFORMER

Transformer – 60W or 75W, 120/12V step down transformer in enclosure.

Enclosure – material is 0.08" thick. 3.23" long by 1.61" wide by 1.34" high in center tapering to 1.1" high at sides.

UNIVERSAL CONNECTOR

Construction: 0.07" die cast aluminum shell

Contacts: Copper for positive and neutral Copper contact spring on top to provide solid contact with ground conductor located on top of rail.


FINISHES

Brushed Nickel, Bronze, and Silver are available.

LABELS AND LISTINGS

UL and cUL Listed for dry location only.

DIMENSIONS

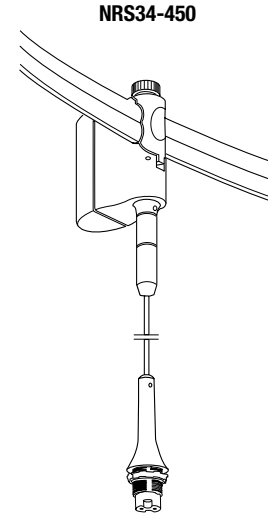

Length : 2-3/4"
Max. Extension : 8'10"



Rail Mounted Pendant Cord Fixture Low Voltage Pendant

Catalog No.	Finish
NRS34-450	BN = Brushed Nickel
	BZ = Bronze
	S = Silver

Create a complete item number: Example: NRS34-450B N

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2014