

RF COAXIAL ADAPTER



XIAN PRECISIONRF ELECTRONICS CO.,LTD

RF CONNECTOR FREQUENCY

1.0mm	110GHz
1.85mm	65GHz
2.4mm	50GHz
SMP	40GHz
SSMA	40GHz
2.92mm	40GHz
3.5mm	33GHz
SMA	27GHz
N	18GHz
7mm	18GHz
L16	18GHz
TNCA	18GHz
TNC	11GHz
BNC	8GHz

ADPTER INDEX

TNC	In-Series , N、 SMA
TNCA	In-Series,N、 SMA
BNC	In-Series,N、 SMA
N	In-Series,L16、 7mm、 3.5mm、 2.92mm、 2.4mm、 BNC、 TNC、 TNCA、 SMA
SMA	In-Series,L16、 N、 3.5mm、 2.92mm、 2.4mm、 BNC、 TNC、 TNCA、 SMP
SSMA	In-Series, To SMA、 2.92mm、 2.4mm
3.5mm	In-Series, To N、 SMA、 2.92mm、 2.4mm、 1.85mm
2.92mm	In-Series ,To N、 SMA、 SSMA、 SMP、 2.4mm、 1.85mm
2.4mm	In-Series ,To N、 SMA、 SSMA、 SMP、 1.85mm
1.85mm	In-Series, To 3.5mm、 2.92mm、 2.4mm、 1.0mm
1.0mm	In-Series, To 1.85mm
7mm	To N, 3.5mm、 2.92mm、 2.4mm
L16	To N、 SMA


TNC In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~11GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

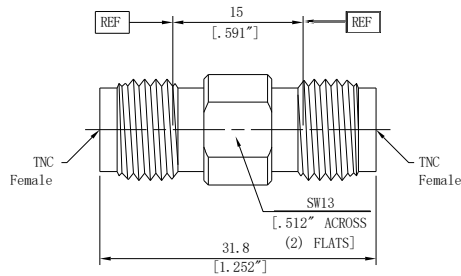

Product	TNC (f) to TNC (f)
Part No.	Z535300Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

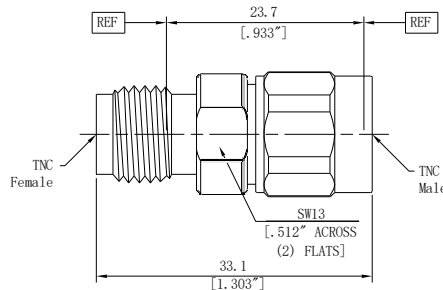

Product	TNC (m) to TNC (f)
Part No.	Z535310Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

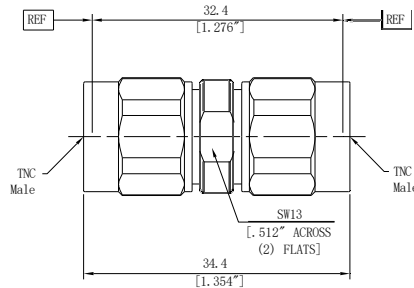

Product	TNC (m) to TNC (m)
Part No.	Z535311Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


TNCA In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

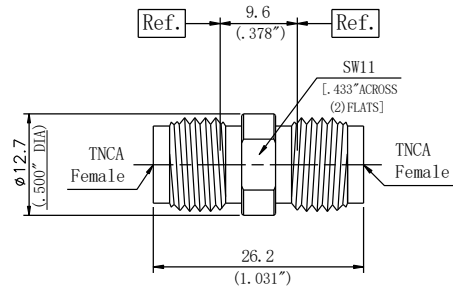


Product	TNCA (f) to TNCA (f)
Part No.	Z545400Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

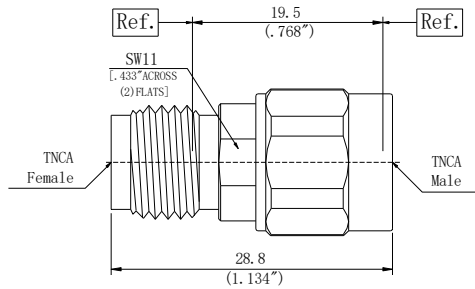


Product	TNCA (m) to TNCA (f)
Part No.	Z545410Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

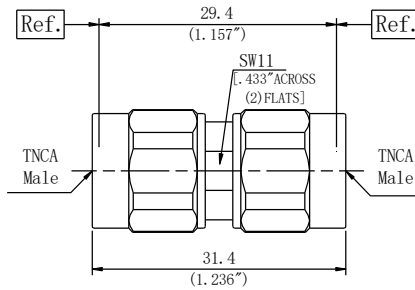

Product	TNCA (m) to TNCA (m)
Part No.	Z545411Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

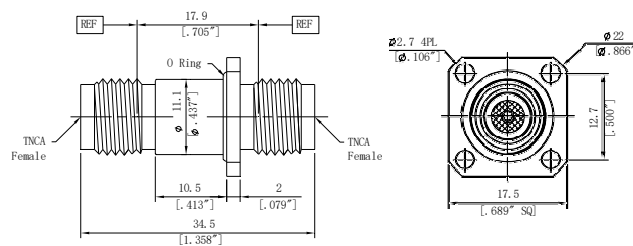

Product	TNCA (f) to TNCA (f) Flange Mount
Part No.	Z545400FS09
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

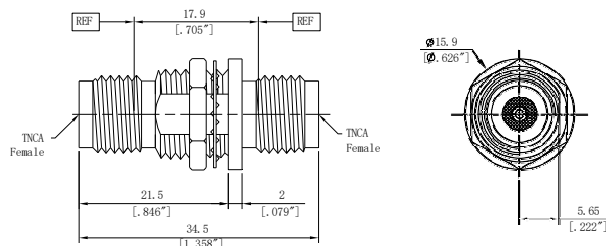

Product	TNCA (f) to TNCA (f) Bulkhead Mount
Part No.	Z545400Y01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)


BNC In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~8GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

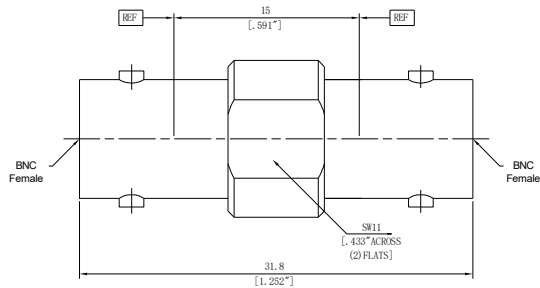

Product	BNC (f) to BNC (f)
Part No.	Z525200Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

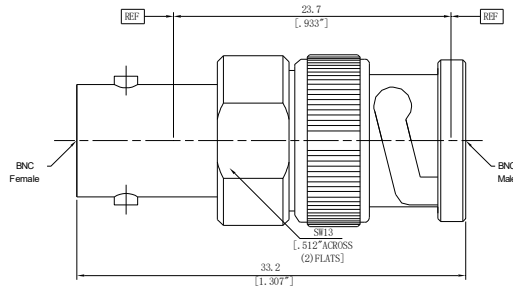

Product	BNC (m) to BNC (f)
Part No.	Z525210Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

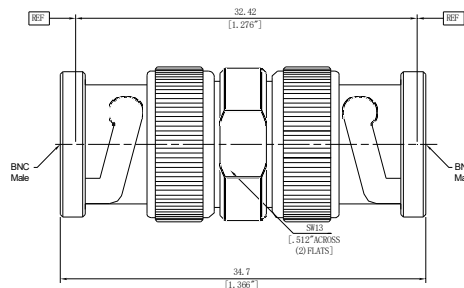

Product	BNC (m) to BNC (m)
Part No.	Z525211Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)


N In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

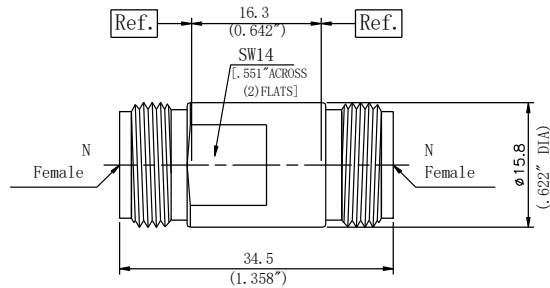


Product	N (f) to N (f)
Part No.	Z343400Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

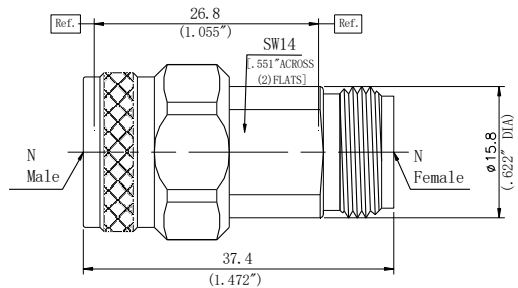


Product	N (m) to N (f)
Part No.	Z343410Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

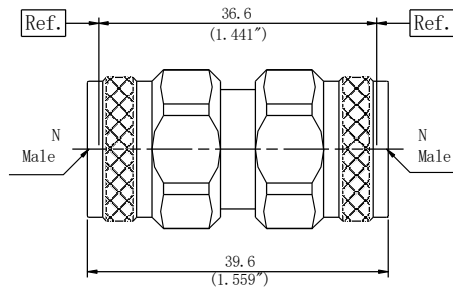

Product	N (m) to N (m)
Part No.	Z343411Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

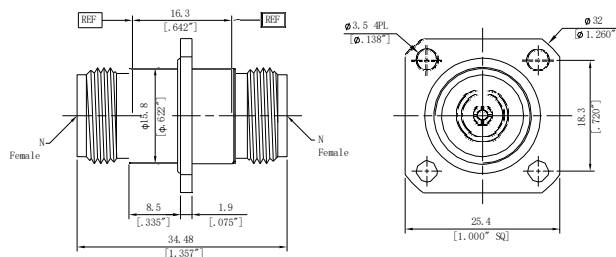


Product	N (f) to N (f) Flange Mount
Part No.	Z343400FS10
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

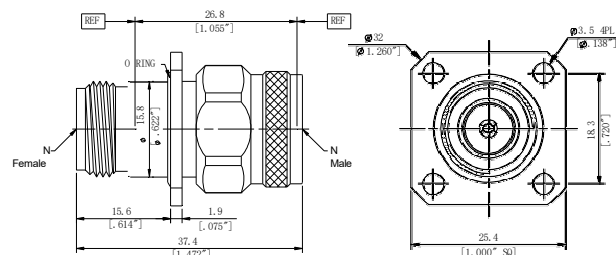


Product	N (m) to N (f) Flange Mount
Part No.	Z343410FS10
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


N In-Series Adapters

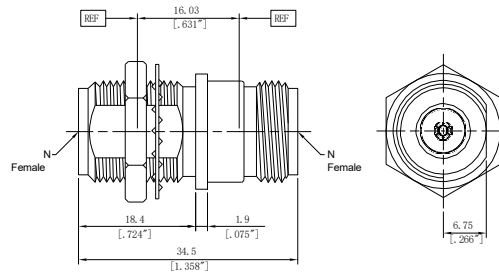


Product	N (f) to N (f) Bulkhead Mount
Part No.	Z343400Y01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)



Product	N (f) to N (f) Right Angle
Part No.	Z343400W01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)



Product	N (m) to N (f) Right Angle
Part No.	Z343410W01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)



Product	N (m) to N (m) Right Angle
Part No.	Z343411W01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


SMA In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~27GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

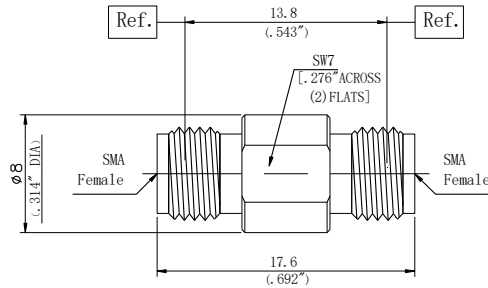


Product	SMA (f) to SMA (f)
Part No.	Z555500Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

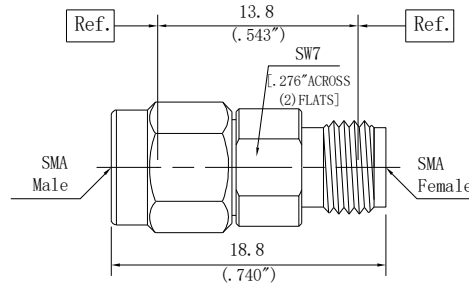


Product	SMA (m) to SMA (f)
Part No.	Z555510Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

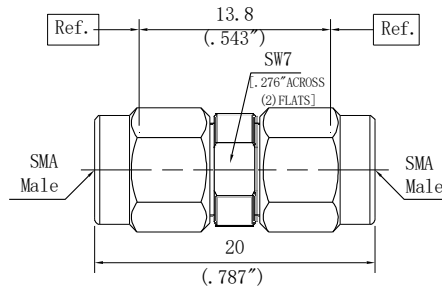

Product	SMA (m) to SMA (m)
Part No.	Z555511Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

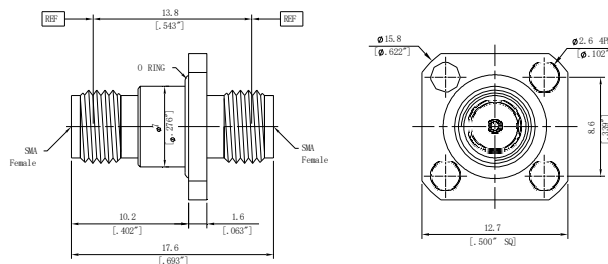


Product	SMA (f) to SMA (f) Flange Mount
Part No.	Z555500FS01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

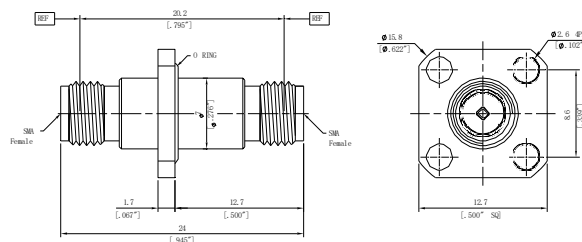


Product	SMA (m) to SMA (f) Flange Mount
Part No.	Z555500FS01A
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)


SMA In-Series Adapters

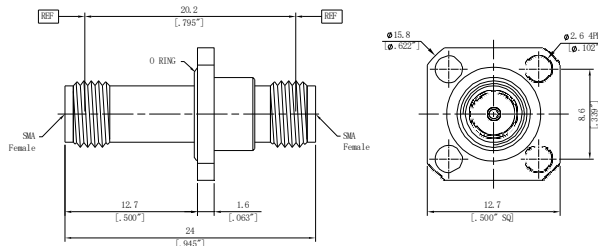


Product SMA (f) to SMA (f)
 Part No. Z555500FS01B
 Frequency DC-27GHz
 VSWR 1.15:1(max)
 Insertion Loss 0.21dB (max)

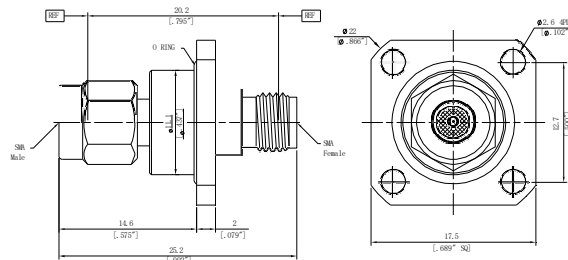


Product SMA (m) to SMA (f)
 Part No. Z555510FS09A
 Frequency DC-27GHz
 VSWR 1.15:1(max)
 Insertion Loss 0.26dB (max)

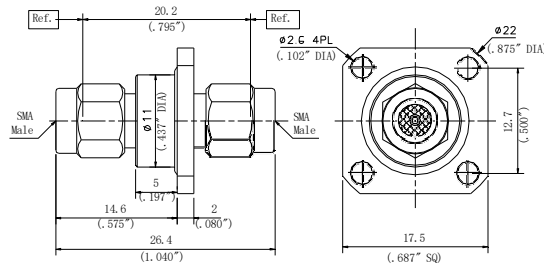


Product SMA (m) to SMA (m)
 Part No. Z555511FS09A
 Frequency DC-27GHz
 VSWR 1.15:1(max)
 Insertion Loss 0.26dB (max)

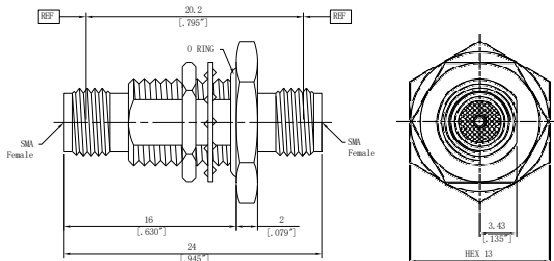

Product SMA (f) to SMA (f)
 Part No. Z555500YS02
 Frequency DC-27GHz
 VSWR 1.15:1(max)
 Insertion Loss 0.26dB (max)

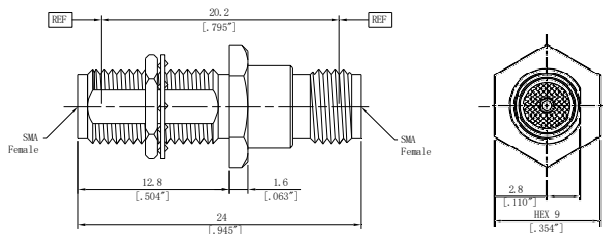


Product SMA (m) to SMA (f)
 Part No. Z555500Y03
 Frequency DC-27GHz
 VSWR 1.15:1(max)
 Insertion Loss 0.26dB (max)

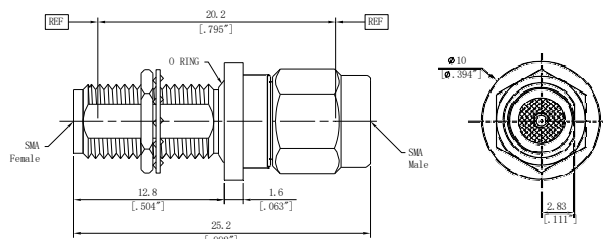


Product SMA (m) to SMA (f)
 Part No. Z555510YS01
 Frequency DC-27GHz
 VSWR 1.15:1(max)
 Insertion Loss 0.26dB (max)


SMA In-Series Adapters



Product	SMA (f) to SMA (f)
Part No.	Right Angle Z555500W01
Frequency	DC-27GHz
VSWR	1.25:1(max)
Insertion Loss	0.26dB (max)



Product	SMA (m) to SMA (f)
Part No.	Right Angle Z555510W01
Frequency	DC-27GHz
VSWR	1.25:1(max)
Insertion Loss	0.26dB (max)



Product	SMA (m) to SMA (m)
Part No.	Right Angle Z555511W01
Frequency	DC-27GHz
VSWR	1.25:1(max)
Insertion Loss	0.26dB (max)


SSMA In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

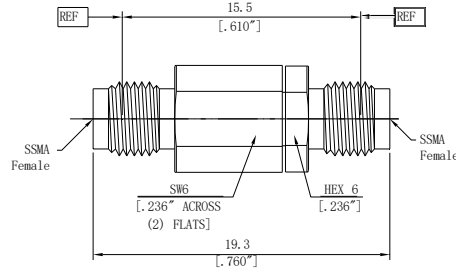

Product	SSMA (f) to SSMA (f)
Part No.	Z575700Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

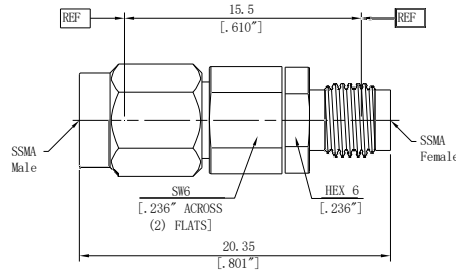

Product	SSMA (m) to SSMA (f)
Part No.	Z575710Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

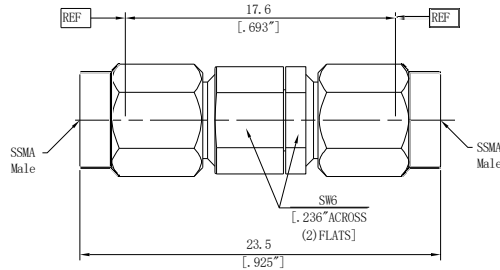

Product	SSMA (m) to SSMA (m)
Part No.	Z575711Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)


3.5mm In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~33GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

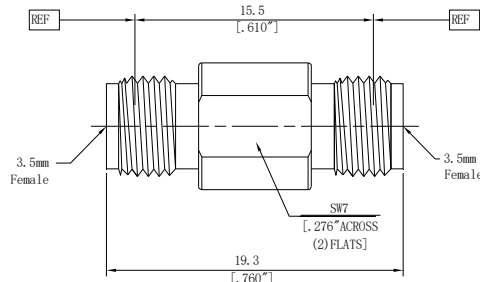


Product	3.5mm (f) to 3.5mm (f)
Part No.	Z353500Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

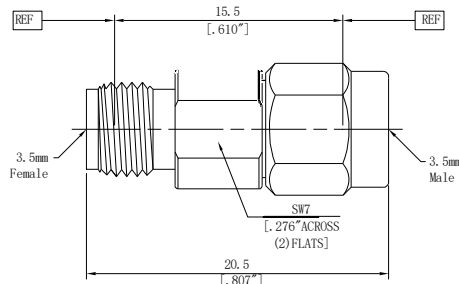


Product	3.5mm (m) to 3.5mm (f)
Part No.	Z353510Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

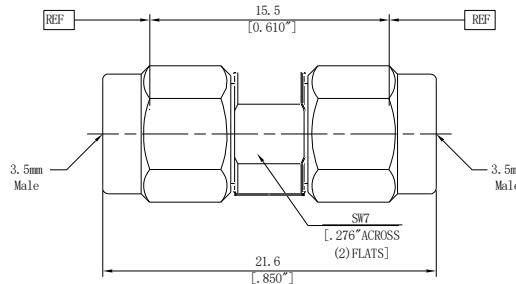

Product	3.5mm (m) to 3.5mm (m)
Part No.	Z353511Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

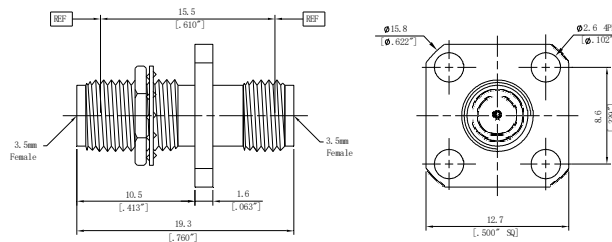


Product	3.5mm (f) to 3.5mm (f)
Part No.	Z353500FY01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

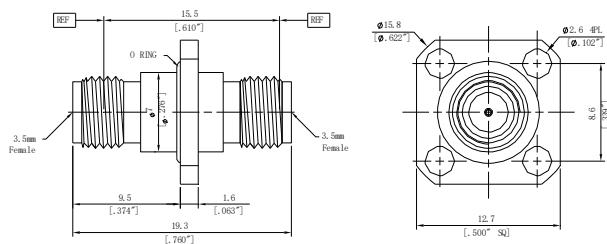


Product	3.5mm (f) to 3.5mm (f)
Part No.	Z353500FS01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)


3.5mm In-Series Adapters

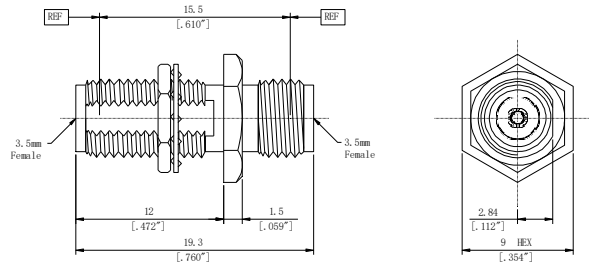


Product	3.5mm (f) to 3.5mm (f) Bulkhead Mount
Part No.	Z353500Y02
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

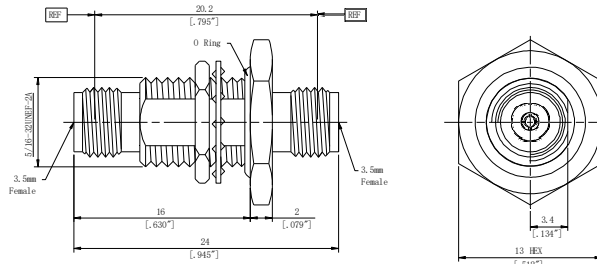


Product	3.5mm (f) to 3.5mm (f) Bulkhead Mount
Part No.	Z353500YS02
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)



Product	3.5mm (f) to 3.5mm (f) Right Angle
Part No.	Z353500W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)



Product	3.5mm (m) to 3.5mm (f) Right Angle
Part No.	Z353510W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)



Product	3.5mm (m) to 3.5mm (m) Right Angle
Part No.	Z353511W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)


2.92mm In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

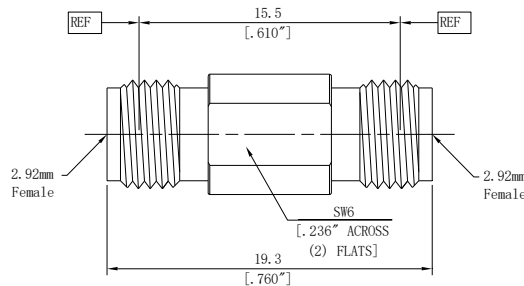


Product	2.92mm (f) to 2.92mm (f)
Part No.	Z363600Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

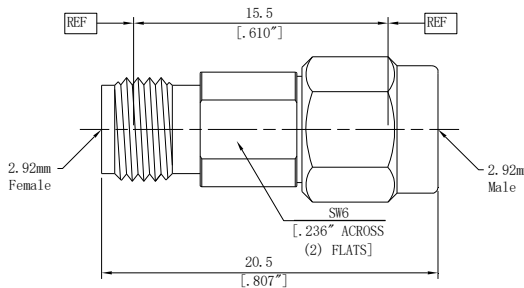


Product	2.92mm (m) to 2.92mm (f)
Part No.	Z363610Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

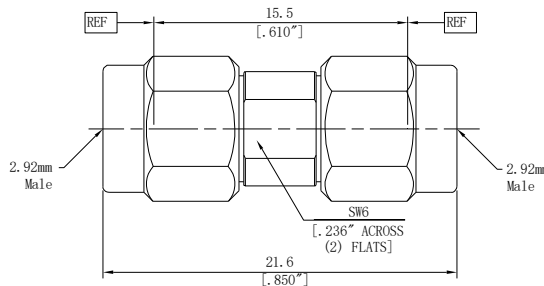

Product	2.92mm (m) to 2.92mm (m)
Part No.	Z363611Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

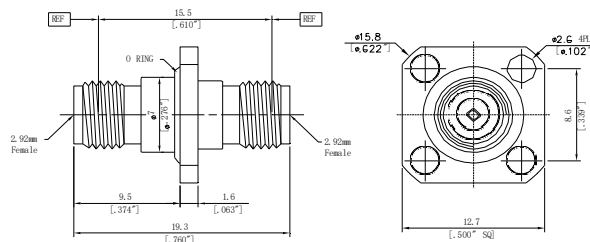


Product	2.92mm (f) to 2.92mm (f) Flange Mount
Part No.	Z363600FS01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

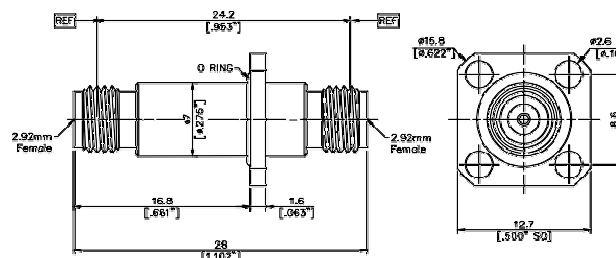


Product	2.92mm (f) to 2.92mm (f) Flange Mount
Part No.	Z363600FS01A
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)


2.92mm In-Series Adapters

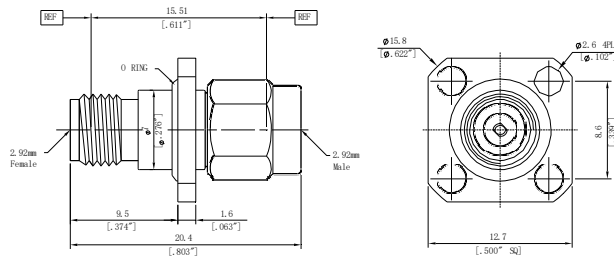


Product	2.92mm (m) to 2.92mm (f) Flange Mount
Part No.	Z363610FS01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

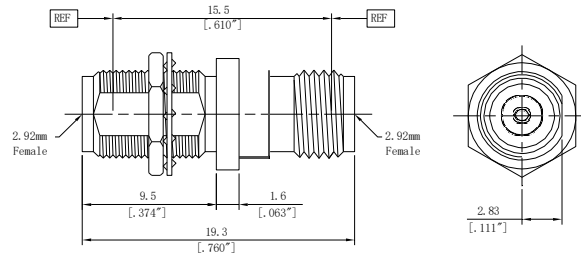


Product	2.92mm (f) to 2.92mm (f) Bulkhead Mount
Part No.	Z363600Y01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

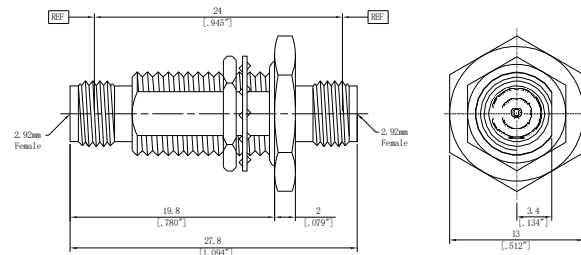


Product	2.92mm (f) to 2.92mm (f) Bulkhead Mount
Part No.	Z363600YS02
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

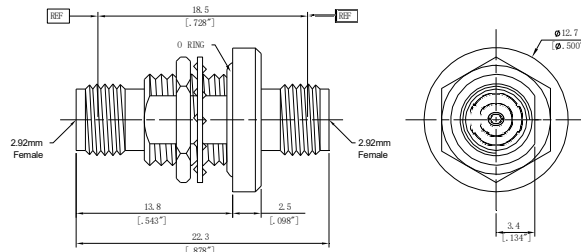

Product	2.92mm (f) to 2.92mm (f) Bulkhead Mount
Part No.	Z363600YS02A
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

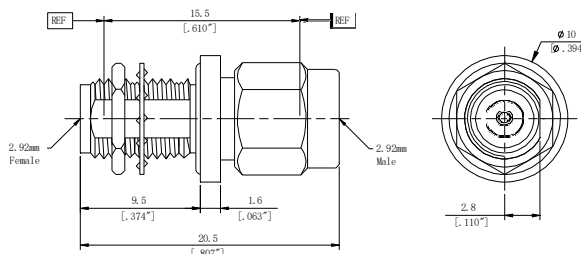


Product	2.92mm (m) to 2.92mm (f) Bulkhead Mount
Part No.	Z363610YS01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.32dB (max)

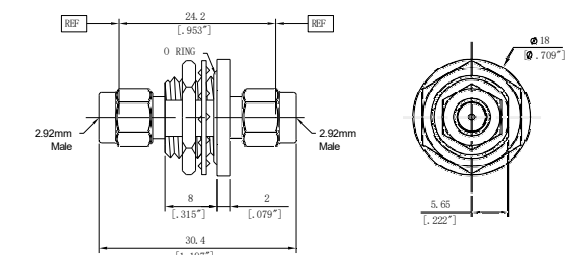


Product	2.92mm (m) to 2.92mm (m) Bulkhead Mount
Part No.	Z363611YS01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.32dB (max)


2.92mm In-Series Adapters



	2.92mm (f) to 2.92mm (f)
Product	Right Angle
Part No.	Z363600W01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)



	2.92mm (m) to 2.92mm (f)
Product	Right Angle
Part No.	Z363610W01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)



	2.92mm (m) to 2.92mm (m)
Product	Right Angle
Part No.	Z363611W01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)


2.4mm In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~50GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

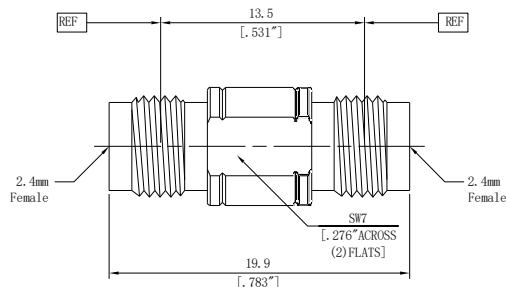


Product	2.4mm (f) to 2.4mm (f)
Part No.	Z373700Z01
Frequency	DC-50GHz
VSWR	1.20:1(max)
Insertion Loss	0.35dB (max)

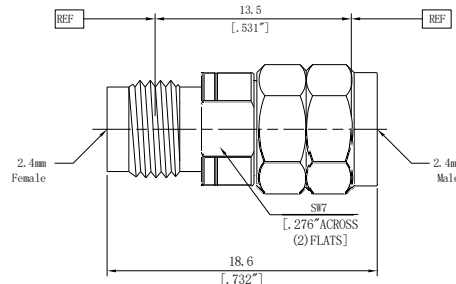


Product	2.4mm (m) to 2.4mm (f)
Part No.	Z373710Z01
Frequency	DC-50GHz
VSWR	1.15:1(max)
Insertion Loss	0.35dB (max)

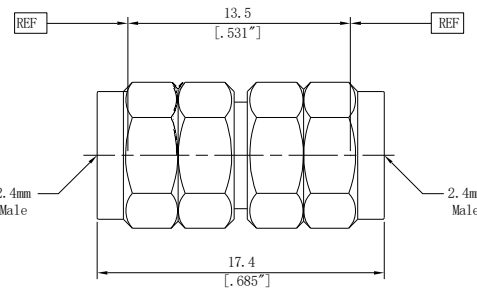

Product	2.4mm (m) to 2.4mm (m)
Part No.	Z373711Z01
Frequency	DC-50GHz
VSWR	1.15:1(max)
Insertion Loss	0.35dB (max)

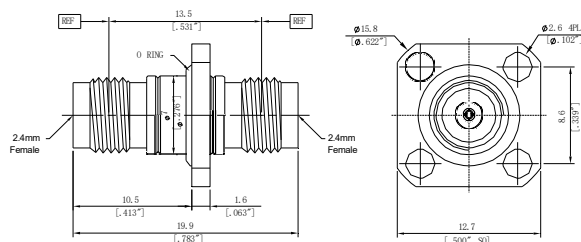


Product	2.4mm (f) to 2.4mm (f) Flange Mount
Part No.	Z373700FS01
Frequency	DC-50GHz
VSWR	1.20:1(max)
Insertion Loss	0.35dB (max)

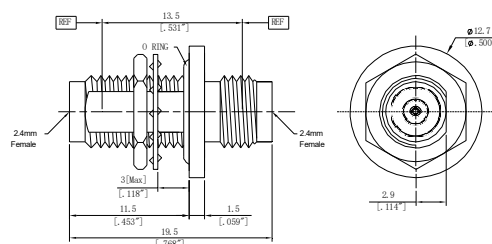


Product	2.4mm (f) to 2.4mm (f) Bulkhead Mount
Part No.	Z373700YS02C
Frequency	DC-50GHz
VSWR	1.20:1(max)
Insertion Loss	0.35dB (max)


2.4mm In-Series Adapters



Product	2.4mm (f) to 2.4mm (f) Right Angle
Part No.	Z373700W01
Frequency	DC-50GHz
VSWR	1.40:1(max)
Insertion Loss	0.42dB (max)




Product	2.4mm (m) to 2.4mm (f) Right Angle
Part No.	Z373710W01
Frequency	DC-50GHz
VSWR	1.40:1(max)
Insertion Loss	0.42dB (max)





Product	2.4mm (m) to 2.4mm (m) Right Angle
Part No.	Z373711W01
Frequency	DC-50GHz
VSWR	1.40:1(max)
Insertion Loss	0.42dB (max)



1.85mm In-Series Adapters

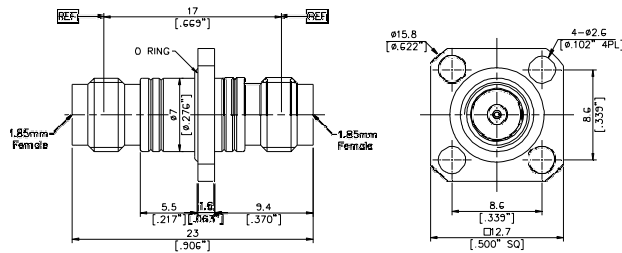



	1.85mm (f) to 1.85mm (f)
Product	Flange Mount
Part No.	Z383800FS01
Frequency	DC-65GHz
VSWR	1.25:1(max)
Insertion Loss	0.4dB (max)



	1.85mm (f) to 1.85mm (f)
Product	Right Angle
Part No.	Z383800W01
Frequency	DC-67GHz
VSWR	1.40:1(max)
Insertion Loss	0.48dB (max)



	1.85mm (m) to 1.85mm (f)
Product	Right Angle
Part No.	Z383810W01
Frequency	DC-67GHz
VSWR	1.40:1(max)
Insertion Loss	0.48dB (max)



	1.85mm (m) to 1.85mm (m)
Product	Right Angle
Part No.	Z383811W01
Frequency	DC-67GHz
VSWR	1.40:1(max)
Insertion Loss	0.48dB (max)


1.0mm In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~110GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

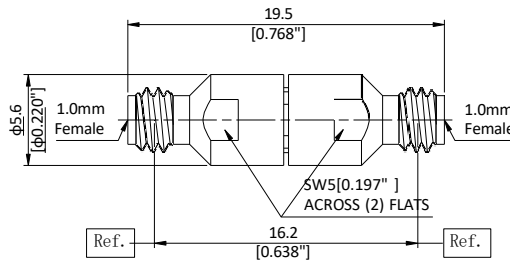

Product	1.0mm (f) to 1.0mm (f)
Part No.	Z393900Z01
Frequency	DC-110GHz
VSWR	1.40:1(max)

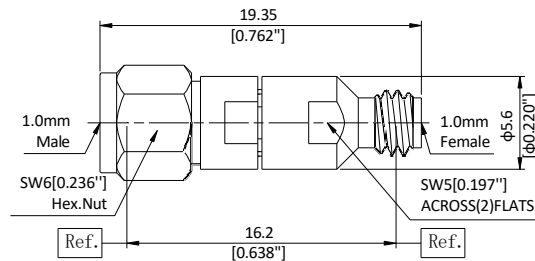

Product	1.0mm (m) to 1.0mm (f)
Part No.	Z393910Z01
Frequency	DC-110GHz
VSWR	1.40:1(max)

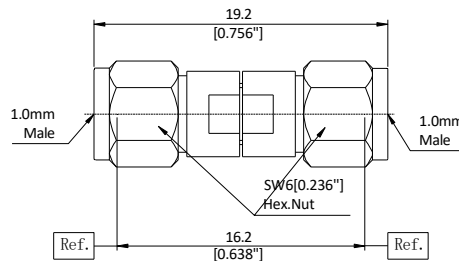

Product	1.0mm (m) to 1.0mm (m)
Part No.	Z393911Z01
Frequency	DC-110GHz
VSWR	1.40:1(max)


7mm In-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

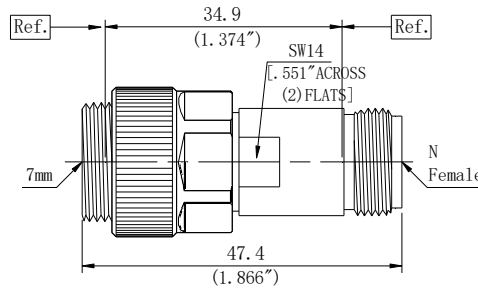


Product	7mm to N (f)
Part No.	Z3334N0Z01
Frequency	DC-18GHz
VSWR	1.10:1(max)
Insertion Loss	0.17dB (max)

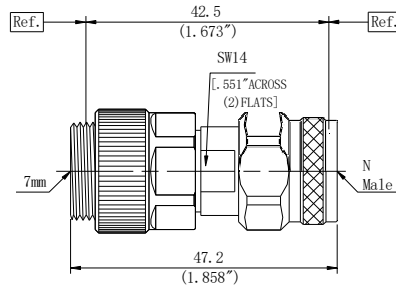


Product	7mm to N (m)
Part No.	Z3334N1Z01
Frequency	DC-18GHz
VSWR	1.10:1(max)
Insertion Loss	0.17dB (max)

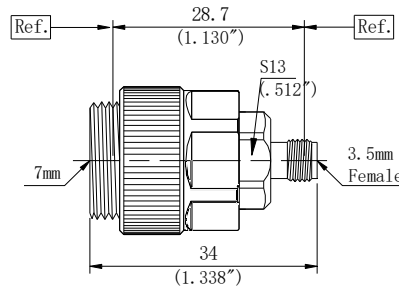

Product	7mm to 3.5mm (f)
Part No.	Z3335N0Z01
Frequency	DC-18GHz
VSWR	1.10:1(max)
Insertion Loss	0.17dB (max)

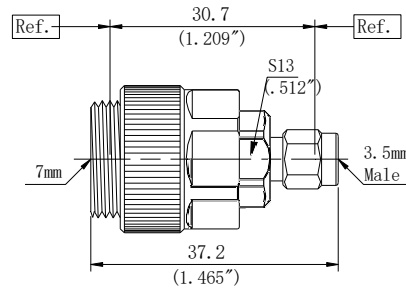

Product	7mm to 3.5mm (m)
Part No.	Z3335N1Z01
Frequency	DC-18GHz
VSWR	1.10:1(max)
Insertion Loss	0.17dB (max)

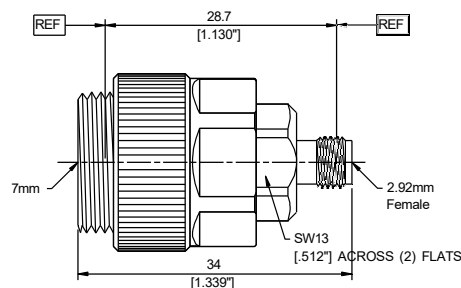

Product	7mm to 2.92mm (f)
Part No.	Z3336N0Z01
Frequency	DC-18GHz
VSWR	1.10:1(max)
Insertion Loss	0.17dB (max)


L16-N Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

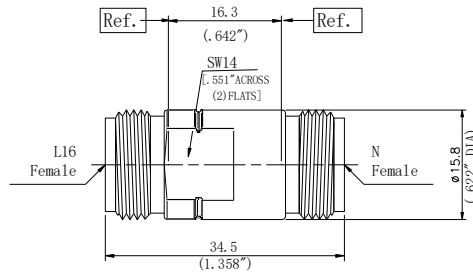


Product	L16 (f) to N (f)
Part No.	Z313400Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

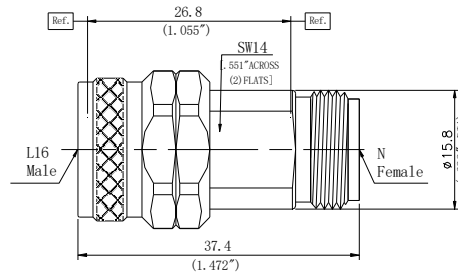

Product	L16 (m) to N (f)
Part No.	Z313410Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

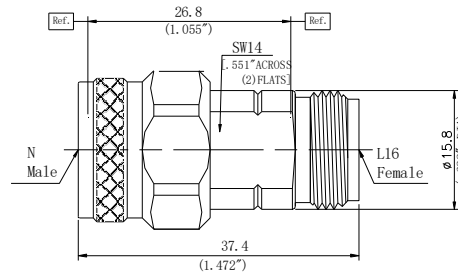

Product	L16 (f) to N (m)
Part No.	Z313401Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

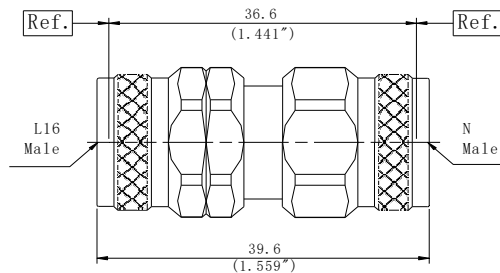

Product	L16 (m) to N (m)
Part No.	Z313411Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


L16-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

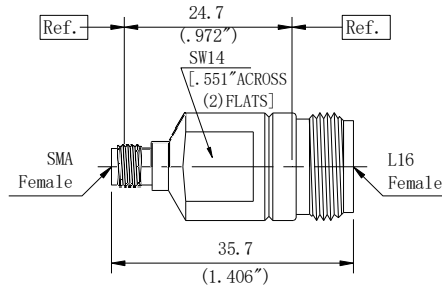


Product	L16 (f) to SMA (f)
Part No.	Z315500Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

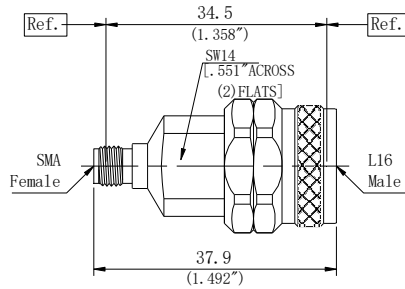

Product	L16 (m) to SMA (f)
Part No.	Z315510Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

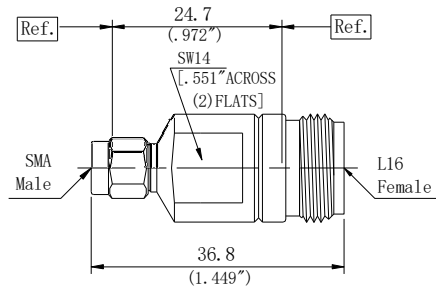

Product	L16 (f) to SMA (m)
Part No.	Z315501Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

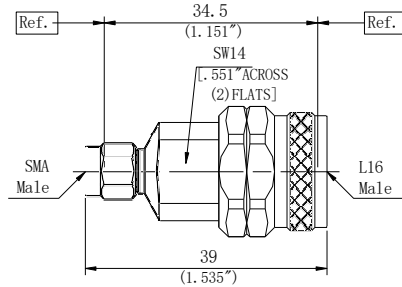

Product	L16 (m) to SMA (m)
Part No.	Z315511Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


N-3.5mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

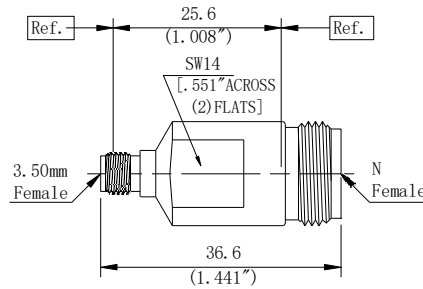


Product	N (f) to 3.5mm (f)
Part No.	Z343500Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

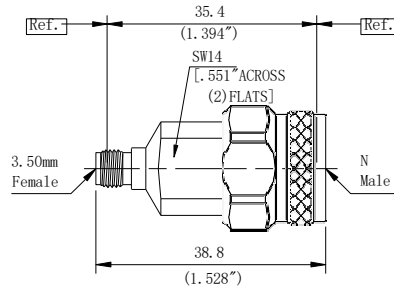

Product	N (m) to 3.5mm (f)
Part No.	Z343510Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

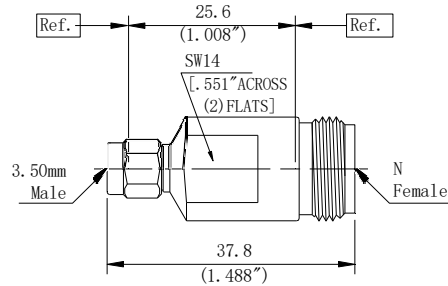

Product	N (f) to 3.5mm (m)
Part No.	Z343501Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

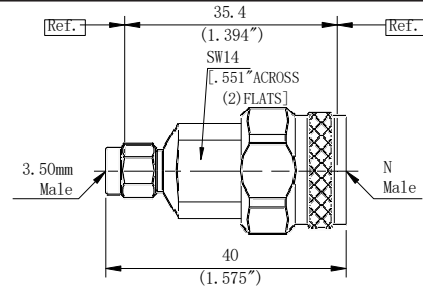

Product	N (m) to 3.5mm (m)
Part No.	Z343511Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


N-2.92mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

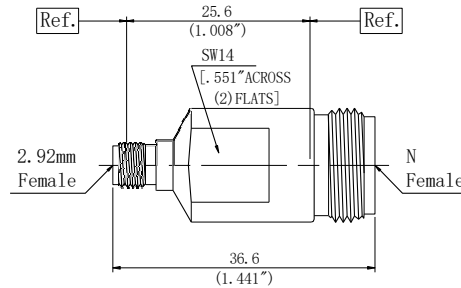


Product	N (f) to 2.92mm (f)
Part No.	Z343600Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

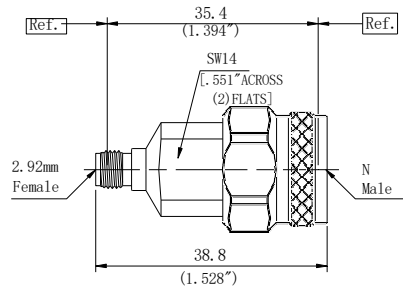

Product	N (m) to 2.92mm (f)
Part No.	Z343610Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

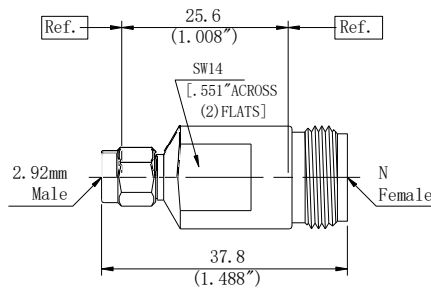

Product	N (f) to 2.92mm (m)
Part No.	Z343601Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

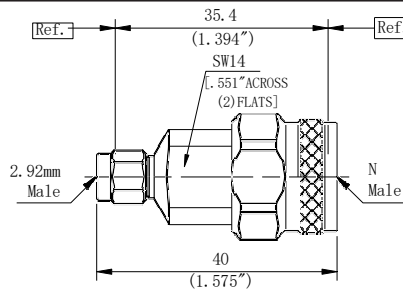

Product	N (m) to 2.92mm (m)
Part No.	Z343611Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


N-2.4mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

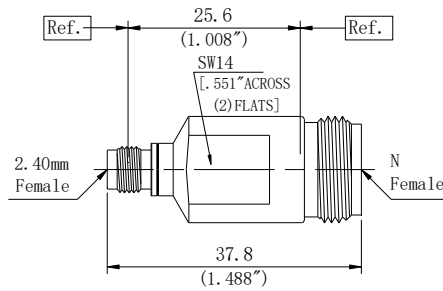


Product	N (f) to 2.4mm (f)
Part No.	Z343700Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

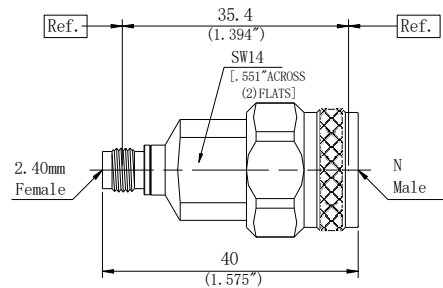

Product	N (m) to 2.4mm (f)
Part No.	Z343710Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

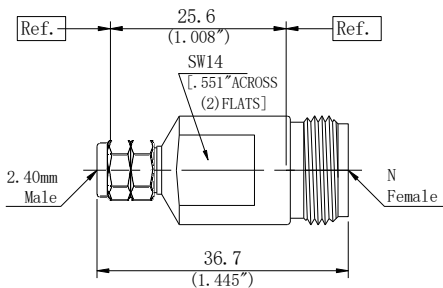

Product	N (f) to 2.4mm (m)
Part No.	Z343701Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

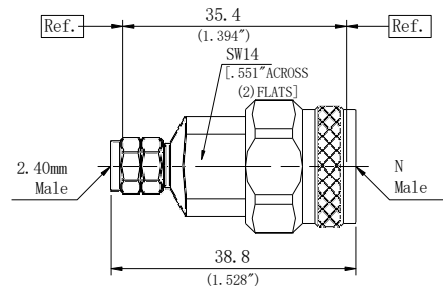

Product	N (m) to 2.4mm (m)
Part No.	Z343711Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


N-BNC Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~8GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

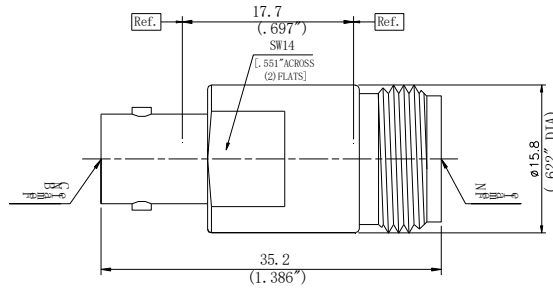


Product	N (f) to BNC (f)
Part No.	Z345200Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

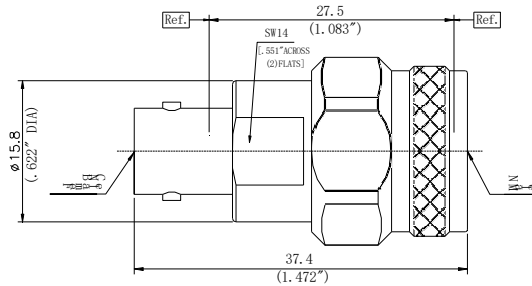

Product	N (m) to BNC (f)
Part No.	Z345210Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

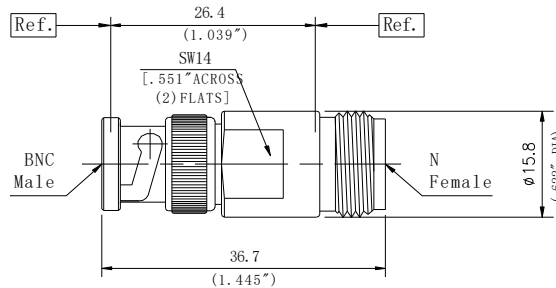

Product	N (f) to BNC (m)
Part No.	Z345201Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

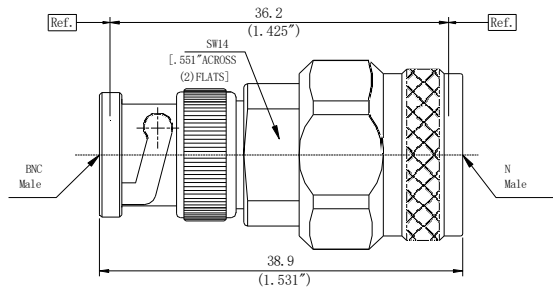

Product	N (m) to BNC (m)
Part No.	Z345211Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)


N-TNC Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~11GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

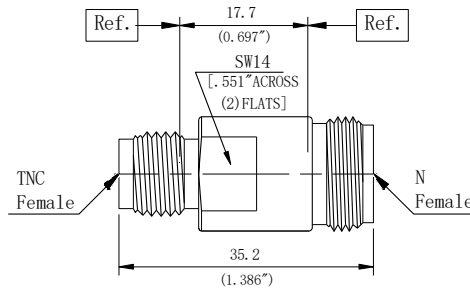


Product	N (f) to TNC (f)
Part No.	Z345300Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.13dB (max)

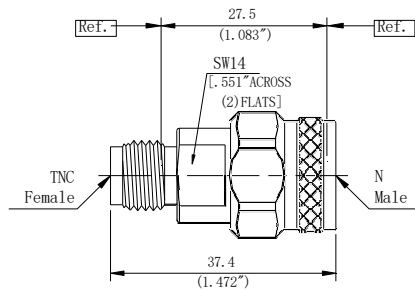

Product	N (m) to TNC (f)
Part No.	Z345310Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.13dB (max)

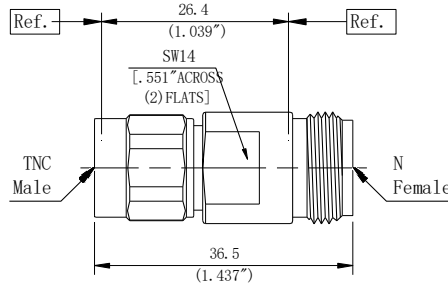

Product	N (f) to TNC (m)
Part No.	Z345301Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.13dB (max)

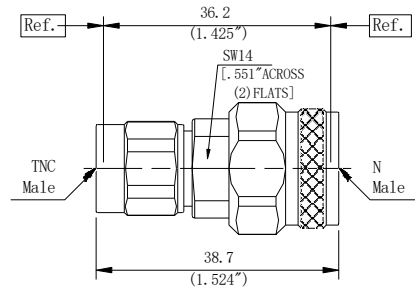

Product	N (m) to TNC (m)
Part No.	Z345311Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.13dB (max)


N-TNCA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

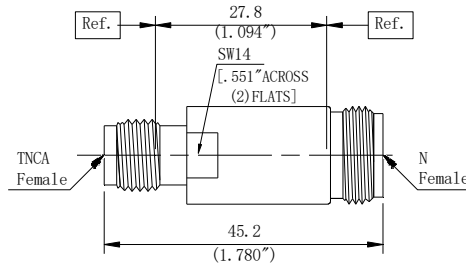


Product	N (f) to TNCA (f)
Part No.	Z345400Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.17dB (max)

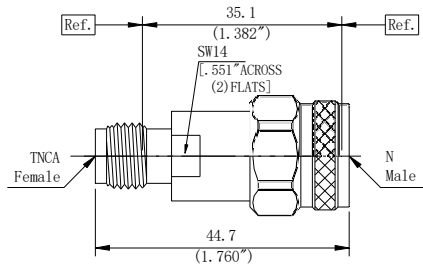


Product	N (m) to TNCA (f)
Part No.	Z345410Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.17dB (max)

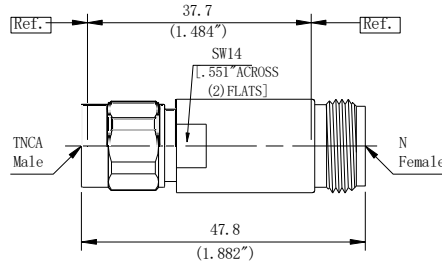

Product	N (f) to TNCA (m)
Part No.	Z345401Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.17dB (max)

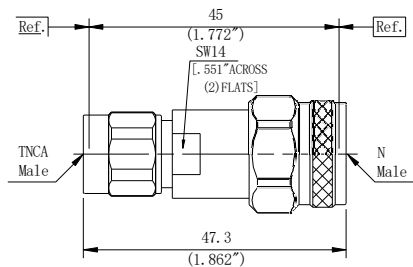

Product	N (m) to TNCA (m)
Part No.	Z345411Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.17dB (max)

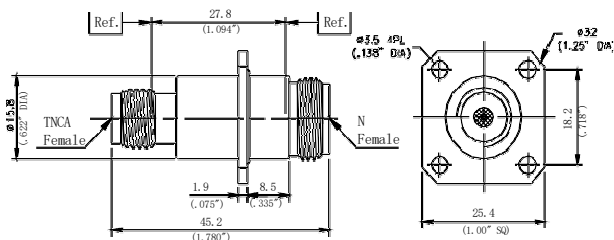

Product	N (f) to TNCA (f) Flange Mount
Part No.	Z345400FS10
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.17dB (max)


N-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

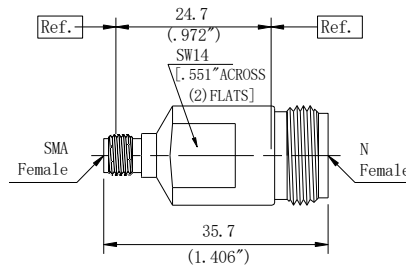


Product	N (f) to SMA(f)
Part No.	Z345500Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

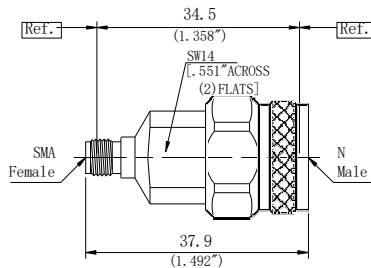


Product	N (m) to SMA (f)
Part No.	Z345510Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

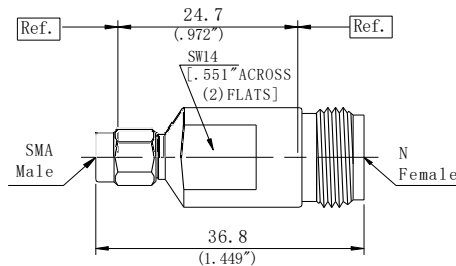

Product	N (f) to SMA (m)
Part No.	Z345501Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

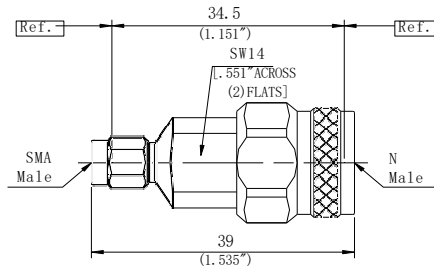


Product	N (m) to SMA (m)
Part No.	Z345511Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

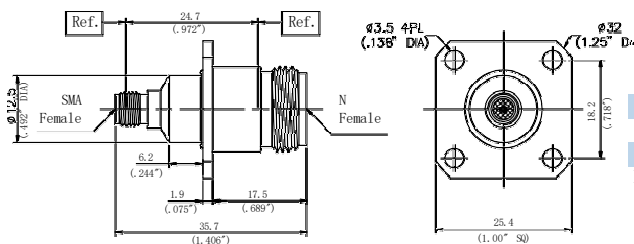


Product	N (f) to SMA (f) Flange Mount
Part No.	Z345500FS10
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


N-SMA Between-Series Adapters

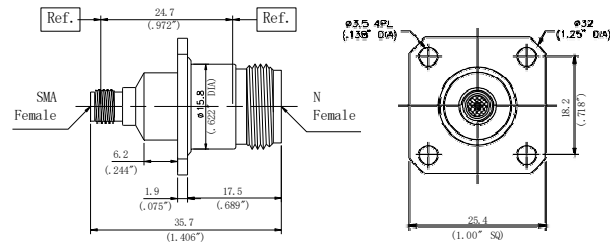


Product	N (f) to SMA (f) Flange Mount
Part No.	Z345500FS10A
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

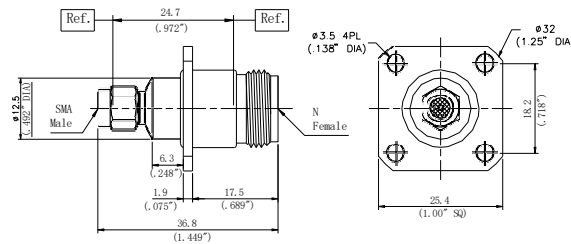


Product	N (f) to SMA (m) Flange Mount
Part No.	Z345501FS10
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

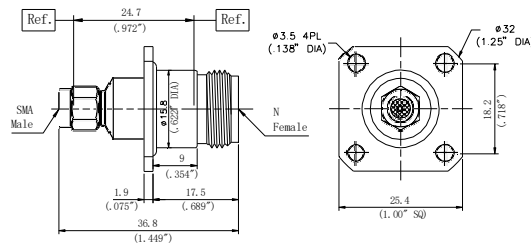


Product	N (f) to SMA (m) Flange Mount
Part No.	Z345501FS10A
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

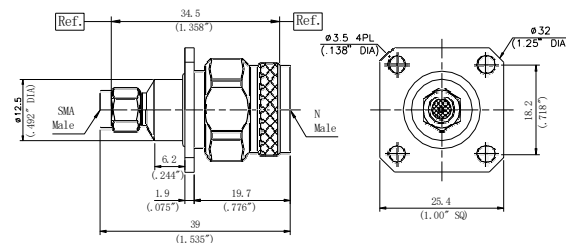

Product	N (m) to SMA (m) Flange Mount
Part No.	Z345511FS10
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

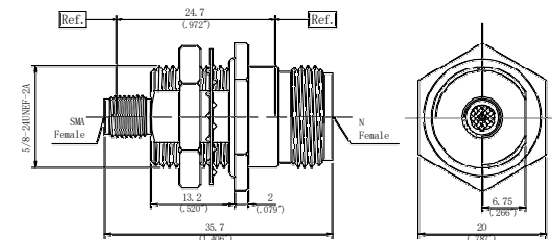

Product	N (f) to SMA (f) Bulkhead Mount
Part No.	Z345500YS01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)

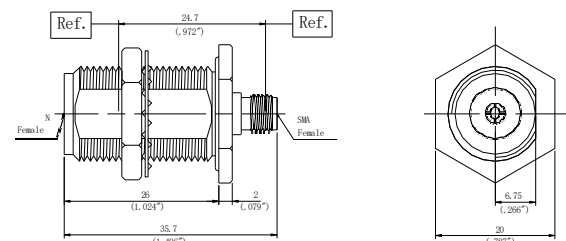

Product	N (f) to SMA (f) Bulkhead Mount
Part No.	Z345500YS02
Frequency	DC-18GHz
VSWR	1.15:1(max)
Insertion Loss	0.17dB (max)


3.5mm-2.92mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~33 GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

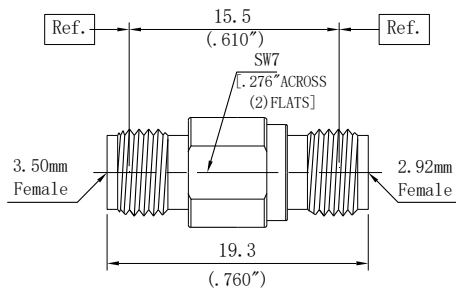


Product	3.5mm (f) to 2.92mm(f)
Part No.	Z353600Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

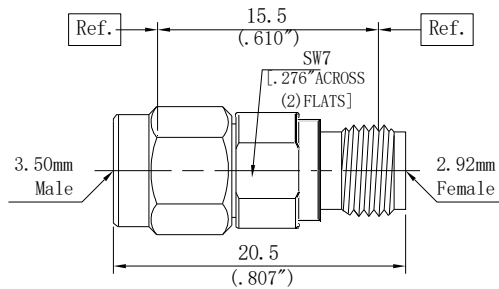


Product	3.5mm (m) to 2.92mm(f)
Part No.	Z353610Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

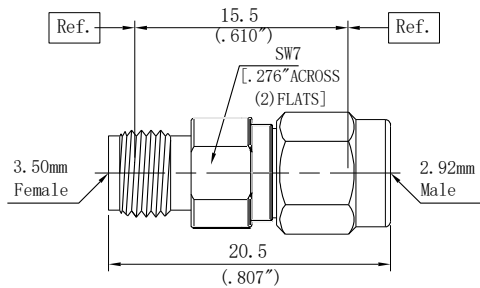

Product	3.5mm (f) to 2.92mm(m)
Part No.	Z353601Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

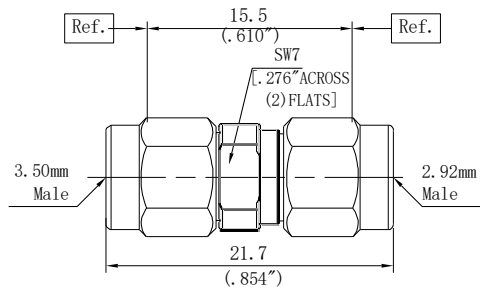

Product	3.5mm (m) to 2.92mm(m)
Part No.	Z353611Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

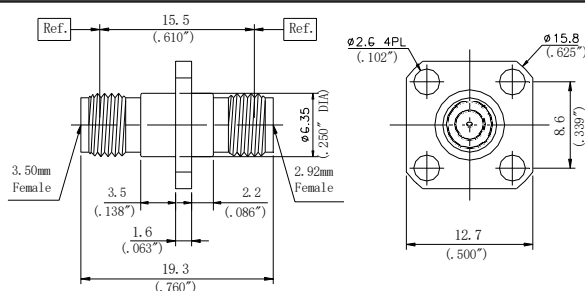

Product	3.5mm (f) to 2.92mm(f)
Part No.	Flange Mount
Frequency	Z353600F01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)


3.5mm-2.4mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~33GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

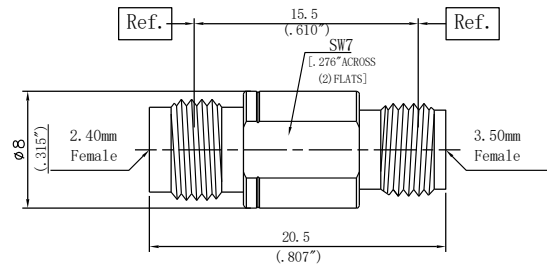


Product	3.5mm (f) to 2.4mm(f)
Part No.	Z353700Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

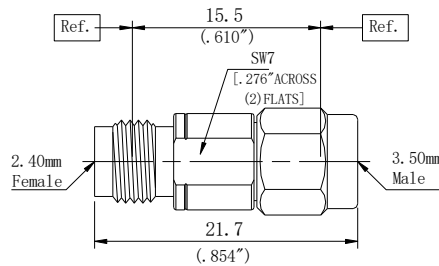

Product	3.5mm (m) to 2.4mm(f)
Part No.	Z353710Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)


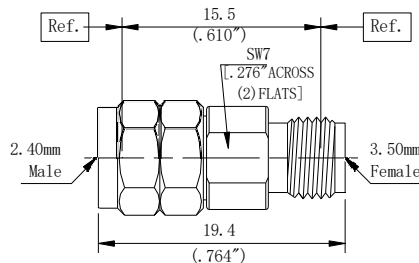


Product	3.5mm (f) to 2.4mm(m)
Part No.	Z353701Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

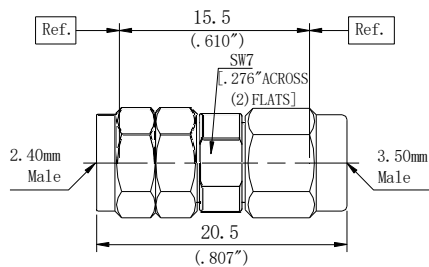


Product	3.5mm (m) to 2.4mm(m)
Part No.	Z353711Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)



3.5mm-2.4mm Between-Series Adapters





Product	3.5mm (f) to 2.4mm(f) Right Angle
Part No.	Z353700W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)



Product	3.5mm (m) to 2.4mm(f) Right Angle
Part No.	Z353710W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)



Product	3.5mm (f) to 2.4mm(m) Right Angle
Part No.	Z353701W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)



Product	3.5mm (m) to 2.4mm(m) Right Angle
Part No.	Z353711W01
Frequency	DC-33GHz
VSWR	1.25:1(max)
Insertion Loss	0.29dB (max)


3.5mm-1.85mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~33GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

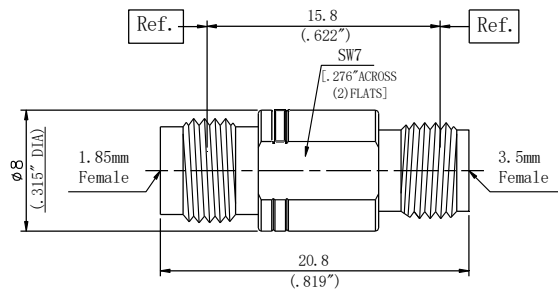


Product	3.5mm (f) to 1.85mm(f)
Part No.	Z353800Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

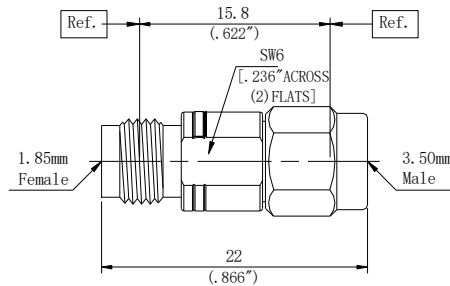

Product	3.5mm (m) to 1.85mm(m)
Part No.	Z353810Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

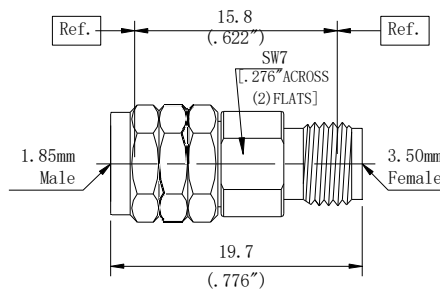

Product	3.5mm (f) to 1.85mm(m)
Part No.	Z353801Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)

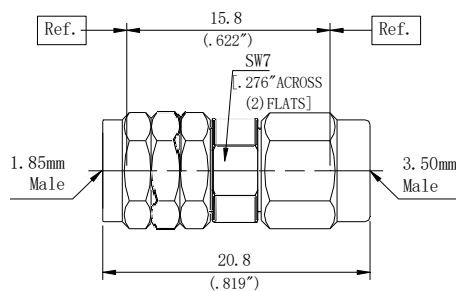

Product	3.5mm (m) to 1.85mm(m)
Part No.	Z353811Z01
Frequency	DC-33GHz
VSWR	1.15:1(max)
Insertion Loss	0.23dB (max)


3.5mm-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~27GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

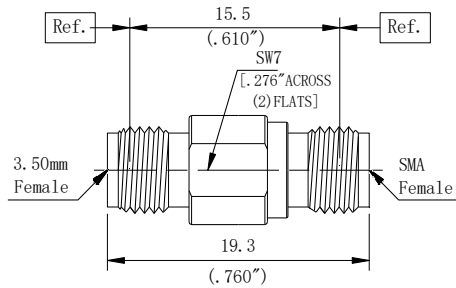


Product	3.5mm (f) to SMA(f)
Part No.	Z355500Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

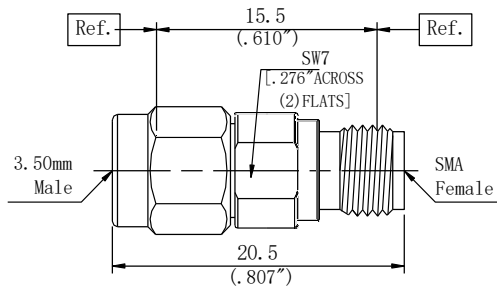

Product	3.5mm (m) to SMA(f)
Part No.	Z355510Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

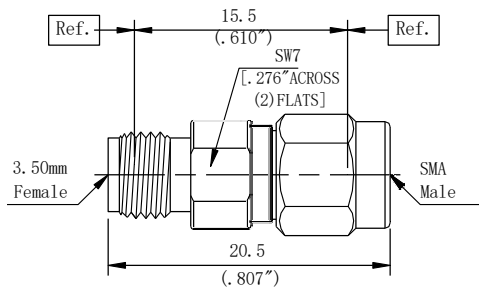

Product	3.5mm (f) to SMA(m)
Part No.	Z355501Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

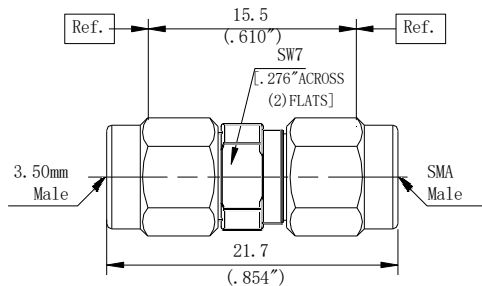

Product	3.5mm (m) to SMA(m)
Part No.	Z355511Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)


2.92mm-2.4mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

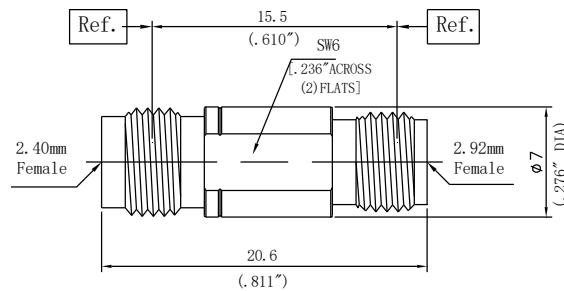


Product	2.92mm (f) to 2.4mm(f)
Part No.	Z363700Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

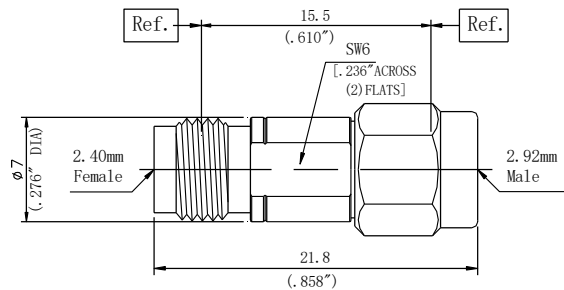


Product	2.92mm (m) to 2.4mm(f)
Part No.	Z363710Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

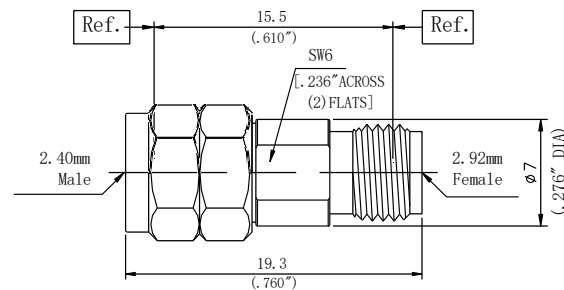

Product	2.92mm (f) to 2.4mm(m)
Part No.	Z363701Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)


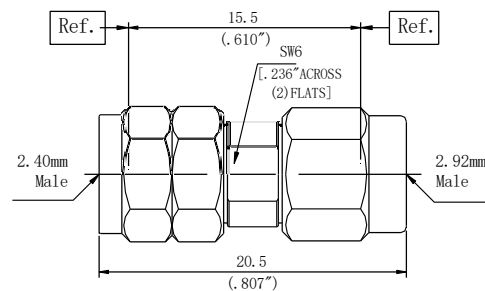


Product	2.92mm (m) to 2.4mm(m)
Part No.	Z363711Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

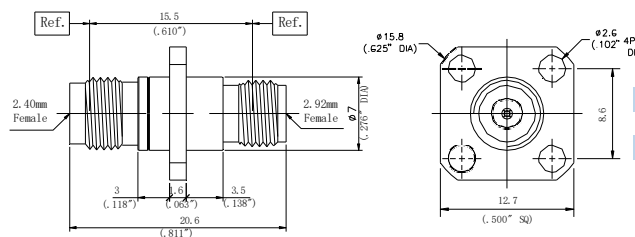


Product	2.92mm (f) to 2.4mm(f) Flange Mount
Part No.	Z363700F01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)



2.92mm-2.4mm Between-Series Adapters





Product	2.92mm (f) to 2.4mm(f) Right Angle
Part No.	Z363700W02
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)



Product	2.92mm (m) to 2.4mm(f) Right Angle
Part No.	Z363710W02
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)



Product	2.92mm (f) to 2.4mm(m) Right Angle
Part No.	Z363701W02
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)



Product	2.92mm (m) to 2.4mm(m) Right Angle
Part No.	Z363711W02
Frequency	DC-40GHz
VSWR	1.25:1(max)
Insertion Loss	0.32dB (max)


2.92mm-1.85mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

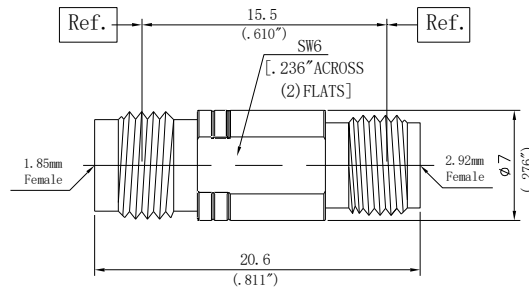


Product	2.92mm (f) to 1.85mm(f)
Part No.	Z363800Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

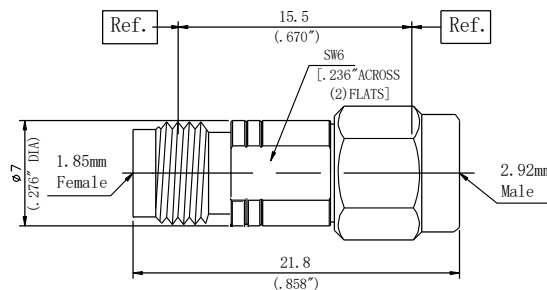

Product	2.92mm (m) to 1.85mm(f)
Part No.	Z363810Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

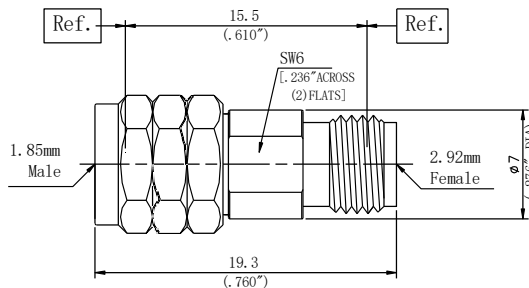

Product	2.92mm (f) to 1.85mm(m)
Part No.	Z363801Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)

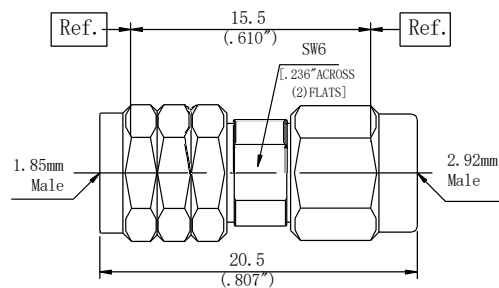

Product	2.92mm (m) to 1.85mm(m)
Part No.	Z363811Z01
Frequency	DC-40GHz
VSWR	1.15:1(max)
Insertion Loss	0.25dB (max)


2.92mm-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~27GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

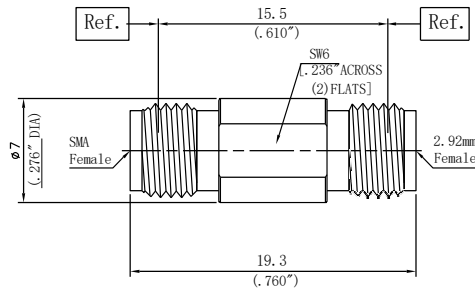


Product	2.92mm (f) to SMA(f)
Part No.	Z365500Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

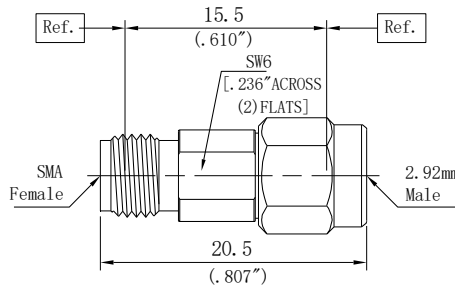

Product	2.92mm (m) to SMA (f)
Part No.	Z365510Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

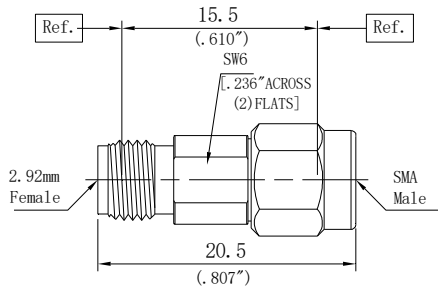

Product	2.92mm (f) to SMA(m)
Part No.	Z365501Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)

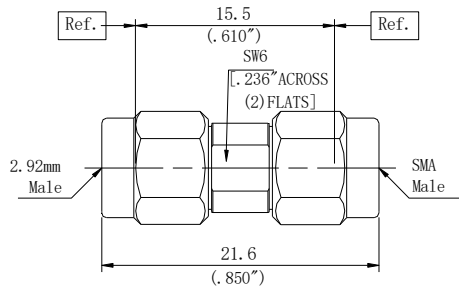

Product	2.92mm (m) to SMA(m)
Part No.	Z365511Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.21dB (max)


2.92mm-SSMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

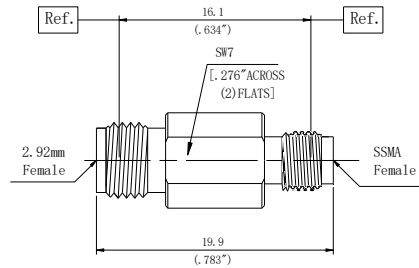


Product	2.92mm (f) to SSMA(f)
Part No.	Z365700Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

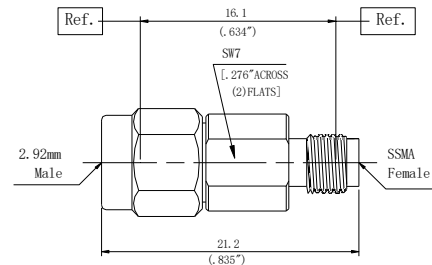

Product	2.92mm (m) to SSMA(f)
Part No.	Z365710Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

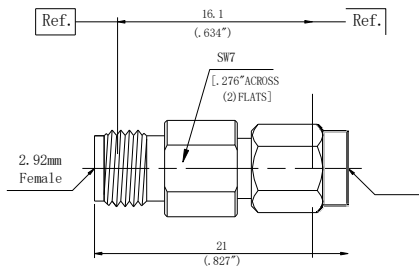

Product	2.92mm (f) to SSMA(m)
Part No.	Z365701Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

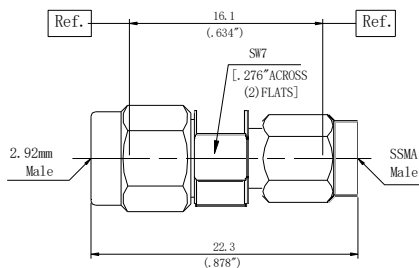

Product	2.92mm (m) to SSMA(m)
Part No.	Z365711Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)


2.92mm-SMP Between-Series Adapters

Technical Performance



Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

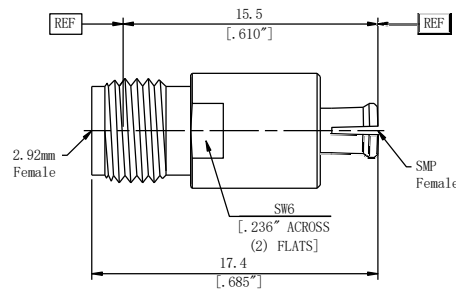


Product	2.92mm (f) to SMP(f)
Part No.	Z366300Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

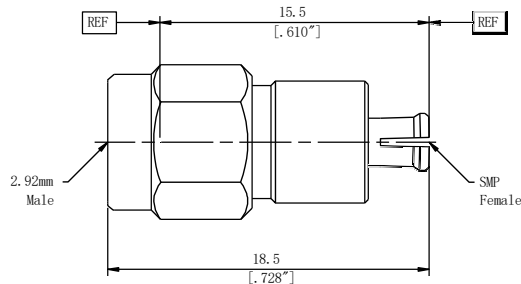


Product	2.92mm (m) to SMP (f)
Part No.	Z366310Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

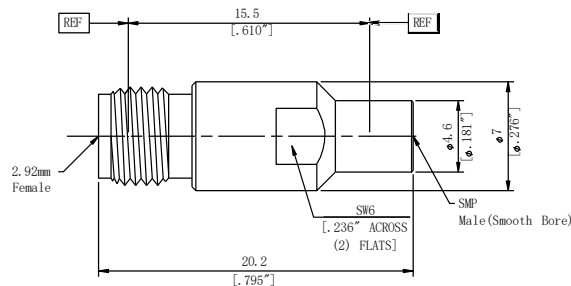

Product	2.92mm (f) to SMP(m) Smooth Bore
Part No.	Z366301Z01S
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)


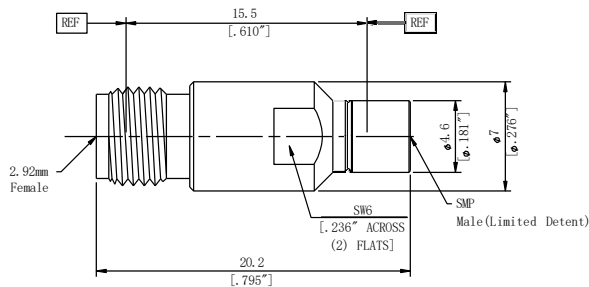


Product	2.92mm (f) to SMP(m) Limited Detent
Part No.	Z366301Z01L
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

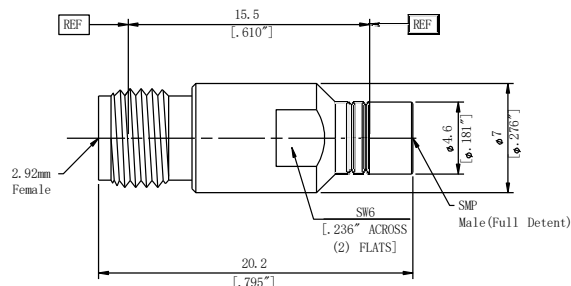


Product	2.92mm (f) to SMP(m) Full Detent
Part No.	Z366301Z01F
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)


2.92-SMP Between-Series Adapters

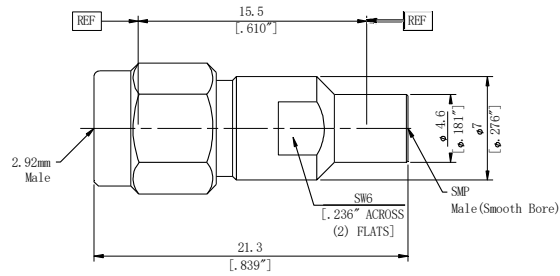

	2.92mm (m) to SMP(m)
Product	Smooth Broe
Part No.	Z366311Z01S
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

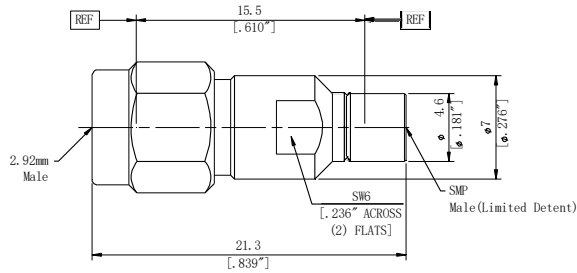

	2.92mm (m) to SMP(m)
Product	Limited Detent
Part No.	Z366311Z01L
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)

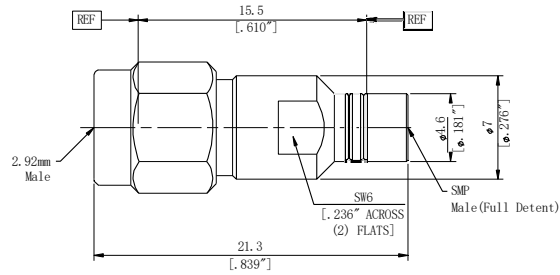

	2.92mm (m) to SMP(m)
Product	Full Detent
Part No.	Z366311Z01F
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.32dB (max)


2.4mm-1.85mm Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~50GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

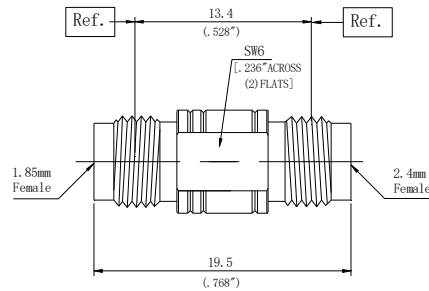


Product	2.4mm (f) to 1.85mm(f)
Part No.	Z373800Z01
Frequency	DC-50GHz
VSWR	1.25:1(max)
Insertion Loss	0.35dB (max)

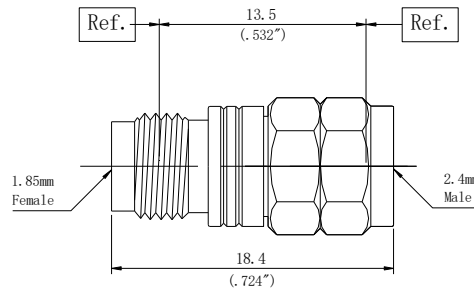

Product	2.4mm (m) to 1.85mm (f)
Part No.	Z373810Z01
Frequency	DC-50GHz
VSWR	1.25:1(max)
Insertion Loss	0.35dB (max)

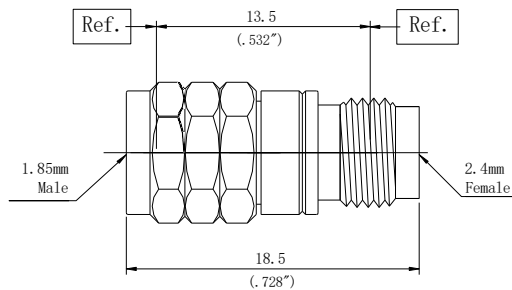

Product	2.4mm (f) to 1.85mm(m)
Part No.	Z373801Z01
Frequency	DC-50GHz
VSWR	1.25:1(max)
Insertion Loss	0.35dB (max)

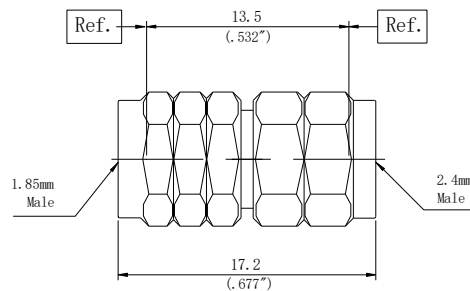

Product	2.4mm (m) to 1.85mm(m)
Part No.	Z373811Z01
Frequency	DC-50GHz
VSWR	1.25:1(max)
Insertion Loss	0.35dB (max)


2.4mm-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~27GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

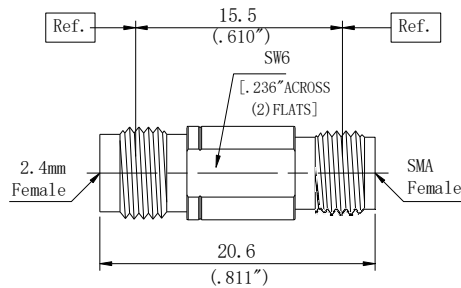


Product	2.4mm (f) to SMA(f)
Part No.	Z375500Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

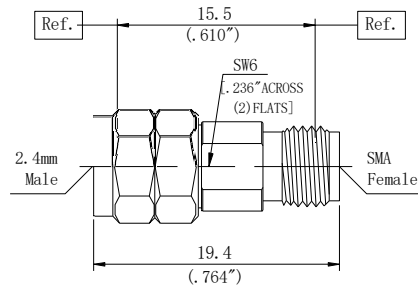

Product	2.4mm (m) to SMA(f)
Part No.	Z375510Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

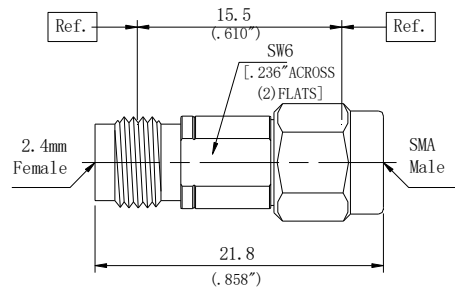

Product	2.4mm (f) to SMA(m)
Part No.	Z375501Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

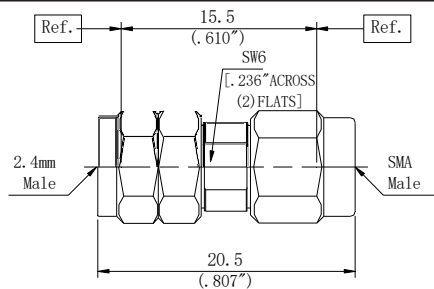

Product	2.4mm (m) to SMA(m)
Part No.	Z375511Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)


2.4mm-SSMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~40GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

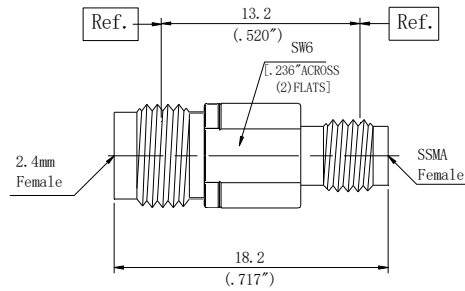


Product	2.4mm (f) to SSMA(f)
Part No.	Z375700Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

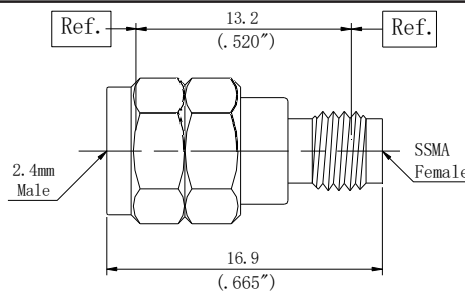

Product	2.4mm (m) to SSMA(f)
Part No.	Z375710Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

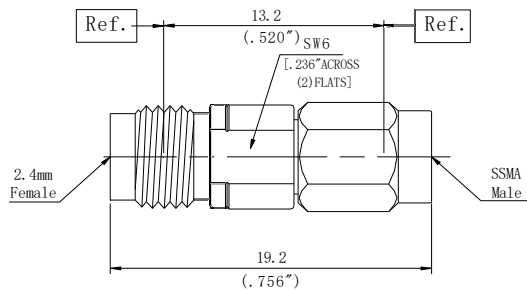

Product	2.4mm (f) to SSMA(m)
Part No.	Z375701Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)

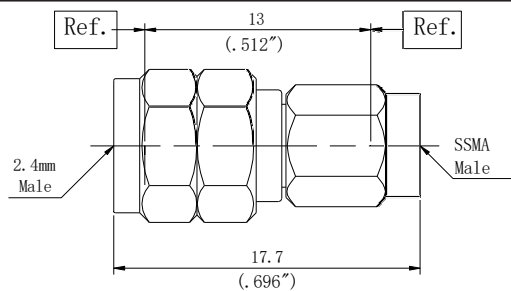

Product	2.4mm (m) to SSMA(m)
Part No.	Z375711Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Insertion Loss	0.25dB (max)


BNC-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~8 GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

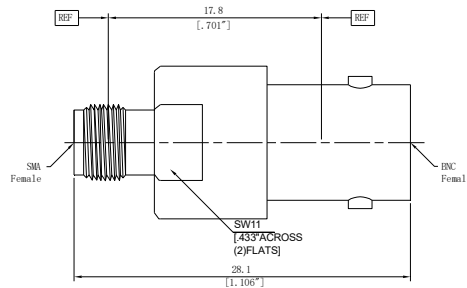


Product	BNC (f) to SMA(f)
Part No.	Z525500Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

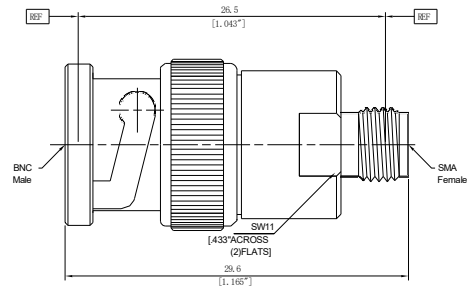

Product	BNC (m) to SMA(f)
Part No.	Z525510Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

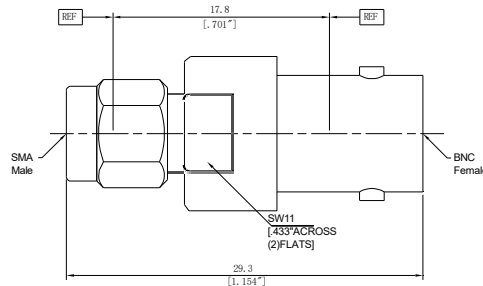

Product	BNC (f) to SMA(m)
Part No.	Z525501Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)

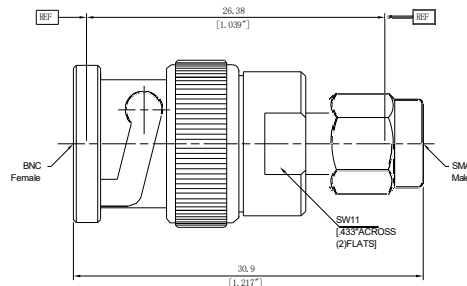

Product	BNC (m) to SMA(m)
Part No.	Z525511Z01
Frequency	DC-8GHz
VSWR	1.15:1(max)
Insertion Loss	0.14dB (max)


TNC-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~11GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

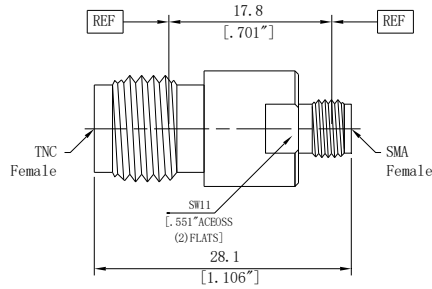


Product	TNC (f) to SMA(f)
Part No.	Z535500Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.16dB (max)

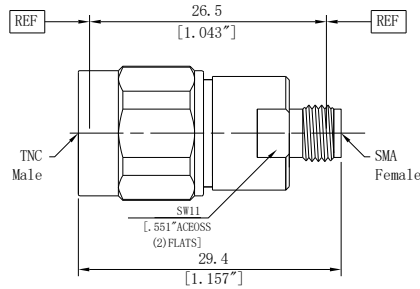

Product	TNC (m) to SMA(f)
Part No.	Z535510Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.16dB (max)

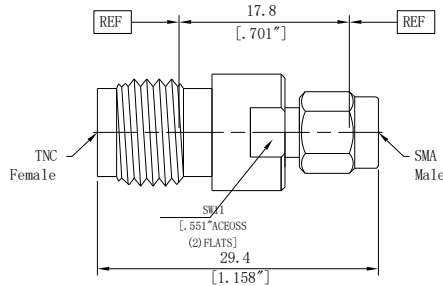

Product	TNC (f) to SMA(m)
Part No.	Z535501Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.16dB (max)

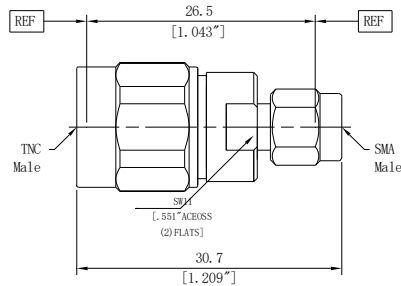

Product	TNC (m) to SMA(m)
Part No.	Z535511Z01
Frequency	DC-11GHz
VSWR	1.15:1(max)
Insertion Loss	0.16dB (max)


TNCA-SMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~18 GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

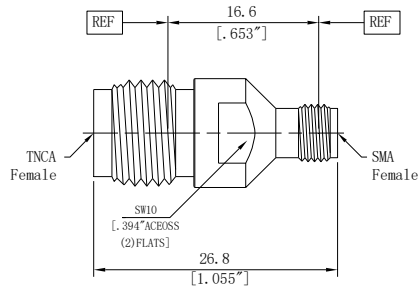


Product	TNCA (f) to SMA(f)
Part No.	Z545500Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

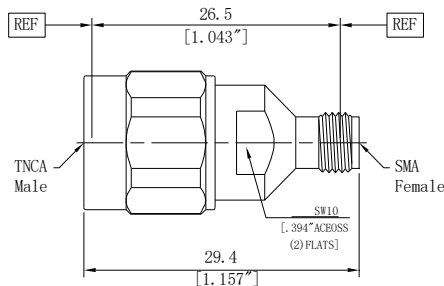


Product	TNCA (m) to SMA(f)
Part No.	Z545510Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

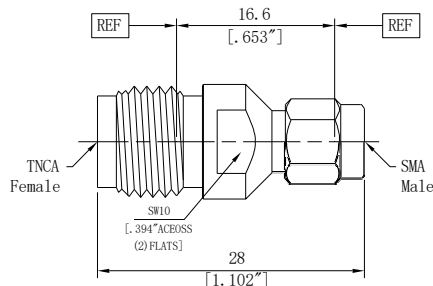

Product	TNCA (f) to SMA(m)
Part No.	Z545501Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

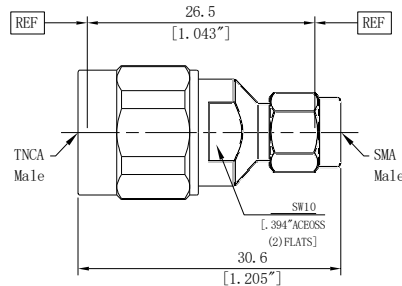

Product	TNCA (m) to SMA(m)
Part No.	Z545511Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)

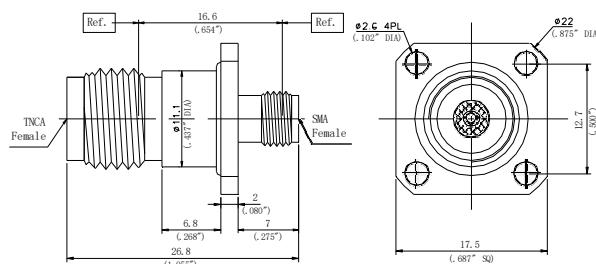

Product	TNCA (f) to SMA(f) Flange Mount
Part No.	Z545500FS09
Frequency	DC-18GHz
VSWR	1.25:1(max)
Insertion Loss	0.21dB (max)


SMA-SSMA Between-Series Adapters

Technical Performance


Impedance:	50Ω
Frequency:	DC~27GHz
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

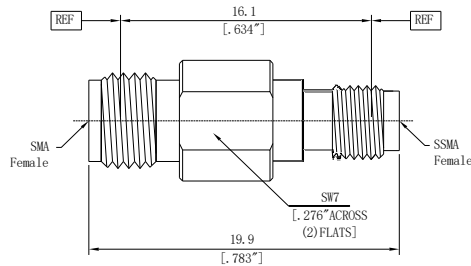


Product	SMA (f) to SSMA(f)
Part No.	Z555700Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

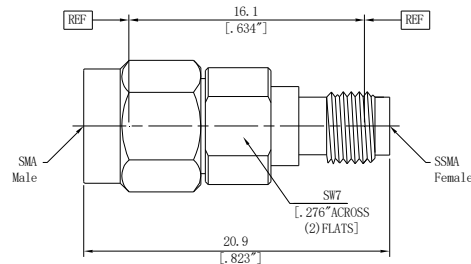

Product	SMA (m) to SSMA(f)
Part No.	Z555710Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

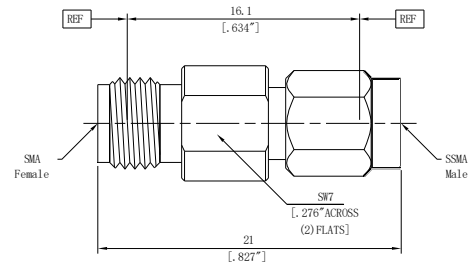

Product	SMA (f) to SSMA(m)
Part No.	Z555701Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

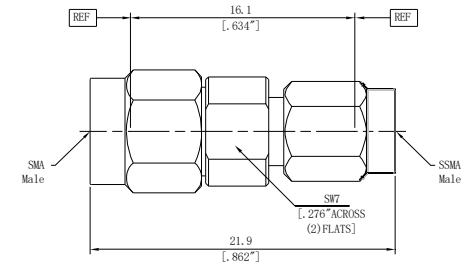

Product	SMA (m) to SSMA(m)
Part No.	Z555711Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Insertion Loss	0.26dB (max)

RF COAXIAL TERMINATIONS




Terminations 0.5W

Technical Performance


Impedance:	50Ω
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

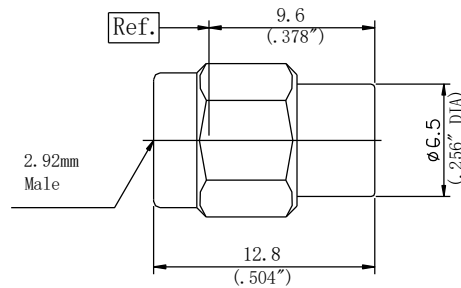


Product	2.92mm(m) Termination
Part No.	T361P0Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Power	≤0.5W

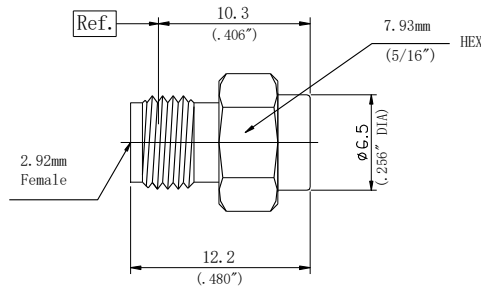


Product	2.92mm(f) Termination
Part No.	T360P0Z01
Frequency	DC-40GHz
VSWR	1.20:1(max)
Power	≤0.5W

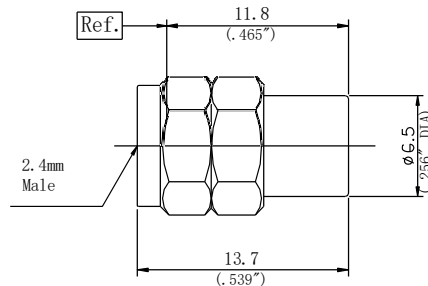

Product	2.4mm(m) Termination
Part No.	T371P0Z01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Power	≤0.5W

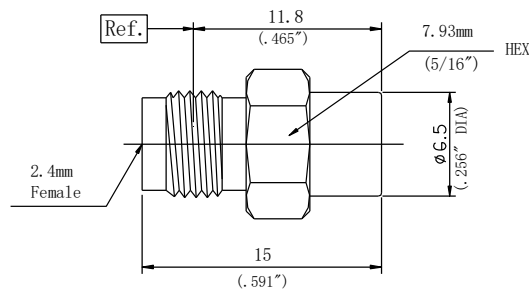

Product	2.4mm(f) Termination
Part No.	T370P0Z01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Power	≤0.5W

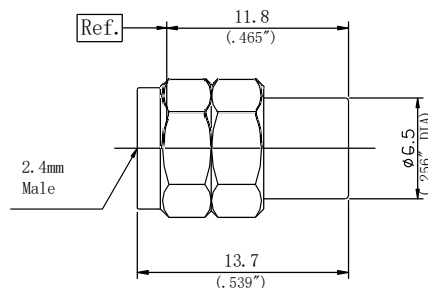

Product	2.4mm(m) Termination
Part No.	T371P0Z01H
Frequency	DC-50GHz
VSWR	1.35:1(max)
Power	≤0.5W


Terminations 1W

Technical Performance


Impedance:	50Ω
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

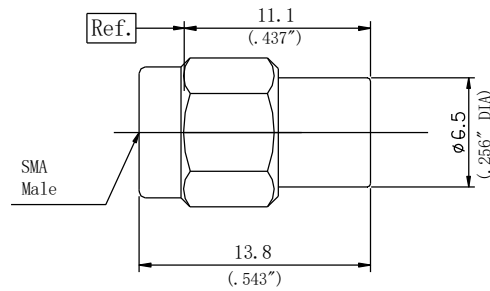


Product	SMA(m) Termination
Part No.	T551P1Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Power	≤1W

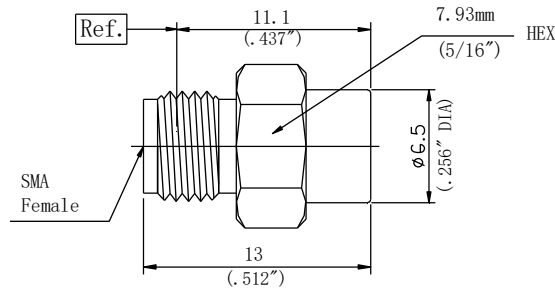


Product	SMA(f) Termination
Part No.	T550P1Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Power	≤1W

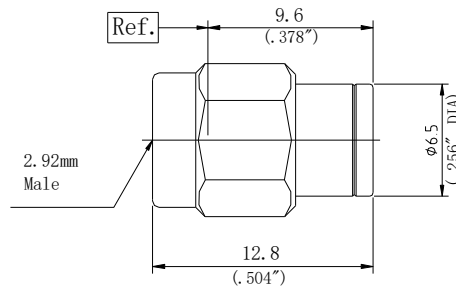

Product	2.92mm(m) Termination
Part No.	T361P1Z01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Power	≤1W

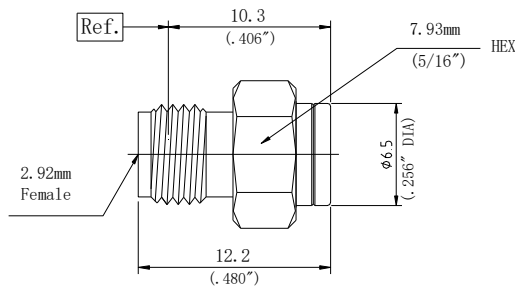


Product	2.92mm(f) Termination
Part No.	T360P1Z01
Frequency	DC-40GHz
VSWR	1.25:1(max)
Power	≤1W

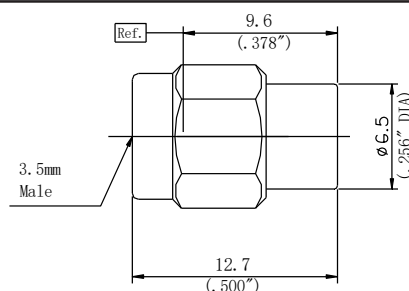


Product	3.5mm(m) Termination
Part No.	T351P1Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Power	≤1W


Terminations 1W

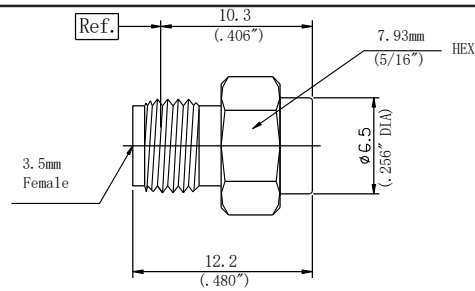


Product	3.5mm(f) Termination
Part No.	T350P1Z01
Frequency	DC-27GHz
VSWR	1.15:1(max)
Power	≤1W

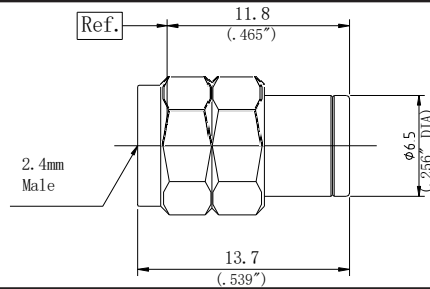


Product	2.4mm(m) Termination
Part No.	T371P1Z01
Frequency	DC-40GHz
VSWR	1.30:1(max)
Power	≤1W

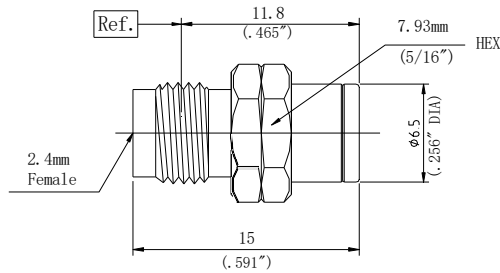



Product	2.4mm(f) Termination
Part No.	T370P1Z01
Frequency	DC-40GHz
VSWR	1.30:1(max)
Power	≤1W

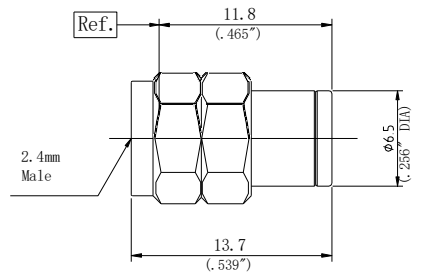

Product	2.4mm(m) Termination
Part No.	T371P1Z01H
Frequency	DC-50GHz
VSWR	1.35:1(max)
Power	≤1W

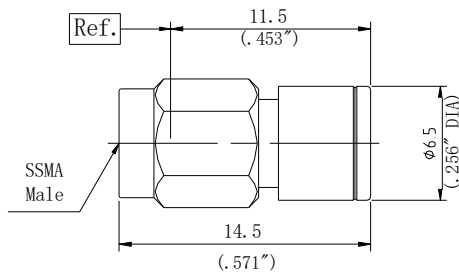

Product	SSMA(m) Termination
Part No.	T571P1Z01
Frequency	DC-40GHz
VSWR	1.30:1(max)
Power	≤1W

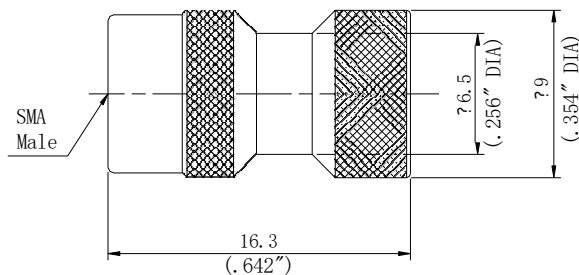

Product	SMA(m) Push-On Termination
Part No.	TK551P1P01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Power	≤1W


Terminations

Technical Performance


Impedance:	50Ω
Cycles:	500 Times
Temp.Range:	-55°C~+165°C

Material /Plating


Body:	Stainless Steel SUS303	Passivated
Center Pin:	BeCu	Gold Plating
Insulator:	PEI&PTFE	

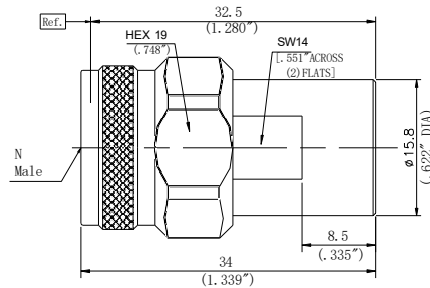


Product	N(m) Termination
Part No.	T341P2Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Power	≤2W

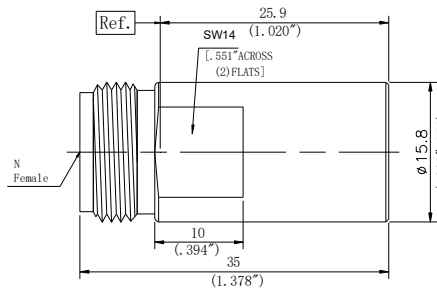


Product	N(f) Termination
Part No.	T340P2Z01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Power	≤2W

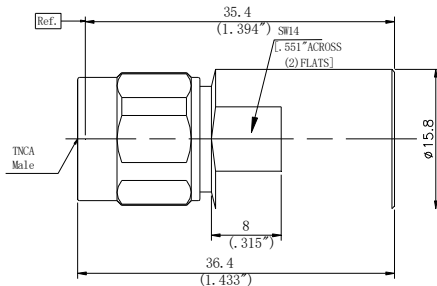

Product	TNCA(m) Termination
Part No.	T541P2Z01
Frequency	DC-18GHz
VSWR	1.25:1(max)
Power	≤2W

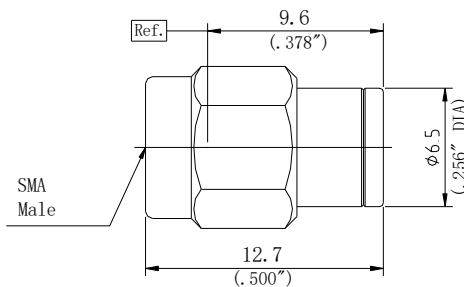


Product	SMA(m) Termination
Part No.	T551P2Z01
Frequency	DC-18GHz
VSWR	1.20:1(max)
Power	≤2W

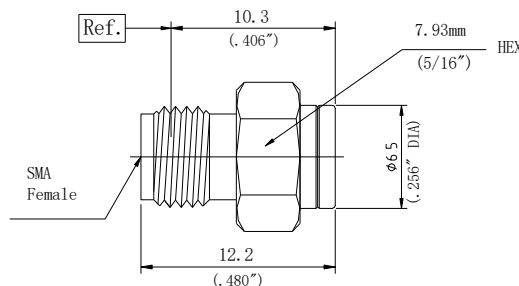


Product	SMA(f) Termination
Part No.	T550P2Z01
Frequency	DC-18GHz
VSWR	1.20:1(max)
Power	≤2W



Terminations

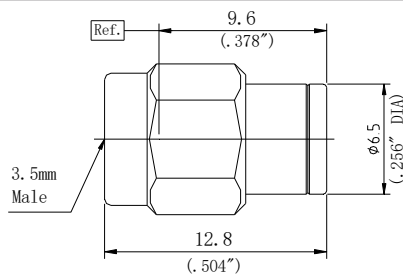

Product	3.5mm(m) Termination
Part No.	T351P2Z01
Frequency	DC-27GHz
VSWR	1.20:1(max)
Power	≤2W

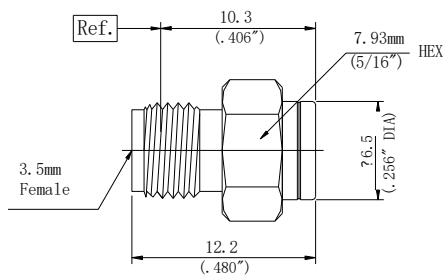

Product	3.5mm(f) Termination
Part No.	T350P2Z01
Frequency	DC-27GHz
VSWR	1.20:1(max)
Power	≤2W

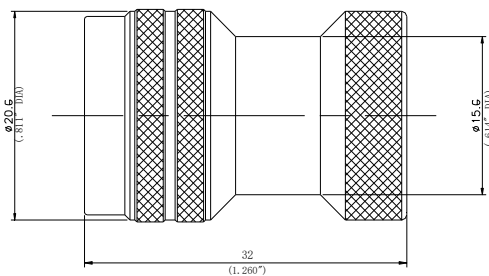

Product	N(m) Push-On Termination
Part No.	TK341P2P01
Frequency	DC-18GHz
VSWR	1.15:1(max)
Power	≤1W