




DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

SkyLine Series LED Back-lit Panel Light

DESCRIPTION

5-Wattages + 5-CCT (35/40/50/57/65K), Damp Rated, 130lm/W,
Dimmable+Smart, With Sensor Receptacle

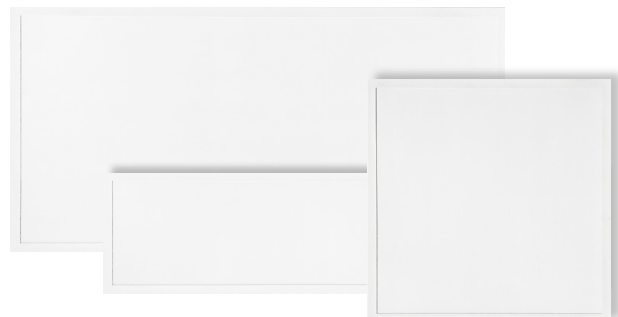

PRODUCT FEATURES

- Extruded aluminum frame, cold-rolled steel housing with matte white coating to resist corrosion, discoloration, and scratching. Damp location rated.
- Built with the highest quality driver that is Universal Voltage (120V-277Vac).
- 0-10V Continuous Dimming.
- Uses long lasting, highly-efficient LED packages.
- Tunable 5-CCT (3500K, 4000K, 5000K, 5700K, 6500K).
- Tunable 5-Wattages.
- Operating temperatures -4°F to 113°F (-20°C to 45°C).
- Recessed T-Bar Ceiling Mount. Optional Flange Kits and Surface Mount Kits available.
- Anti-UV Frosted Polycarbonate Lens.
- Installed 90 Minute Emergency Backup Battery Driver options available.
- With Sensor Receptacle, Quick and Easy in-field installation of sensors.
- DLC Premium listed. ETL certified to meet US and Canadian standards. FCC and RoHS compliant.
- 5 years exclusive limited warranty.

ORDERING INFORMATION

Order Code	DLC Product ID	Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Dimensions
010204	S-FRVCC0	NC-BPL14-M40W-CCT	1x4	(15W, 20W, 25W, 30W, 40W)	120-277V	0.15A@120V,0.08A@277V 0.19A@120V,0.10A@277V 0.23A@120V,0.11A@277V 0.28A@120V,0.13A@277V 0.37A@120V,0.17A@277V	1950 2600 3250 3810 5000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.76"L x 11.93"W x 1.38"H
-	-	NC-BPL14-M40W-CCT-S	1x4	(15W, 20W, 25W, 30W, 40W)	120-277V	0.15A@120V,0.08A@277V 0.19A@120V,0.10A@277V 0.23A@120V,0.11A@277V 0.28A@120V,0.13A@277V 0.37A@120V,0.17A@277V	1950 2600 3250 3810 5000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.76"L x 11.93"W x 1.38"H
010203	S-KK2HX9	NC-BPL22-M40W-CCT	2x2	(15W, 20W, 25W, 30W, 40W)	120-277V	0.14A@120V,0.08A@277V 0.19A@120V,0.09A@277V 0.23A@120V,0.11A@277V 0.27A@120V,0.12A@277V 0.36A@120V,0.15A@277V	1950 2600 3250 3810 5000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	23.74"L x 23.74"W x 1.38"H
-	-	NC-BPL22-M40W-CCT-S	2x2	(15W, 20W, 25W, 30W, 40W)	120-277V	0.14A@120V,0.08A@277V 0.19A@120V,0.09A@277V 0.23A@120V,0.11A@277V 0.27A@120V,0.12A@277V 0.36A@120V,0.15A@277V	1950 2600 3250 3810 5000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	23.74"L x 23.74"W x 1.38"H
010202	-	NC-BPL24-M50W-CCT	2x4	(25W, 30W, 35W, 40W, 50W)	120-277V	0.22A@120V,0.11A@277V 0.26A@120V,0.12A@277V 0.30A@120V,0.14A@277V 0.34A@120V,0.15A@277V 0.43A@120V,0.19A@277V	3250 3900 4550 5080 6250	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.76"L x 23.74"W x 1.38"H
-	-	NC-BPL24-M50W-CCT-S	2x4	(25W, 30W, 35W, 40W, 50W)	120-277V	0.22A@120V,0.11A@277V 0.26A@120V,0.12A@277V 0.30A@120V,0.14A@277V 0.34A@120V,0.15A@277V 0.43A@120V,0.19A@277V	3250 3900 4550 5080 6250	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.76"L x 23.74"W x 1.38"H
010201	S-Q25QKF	NC-BPL24-M72W-CCT	2x4	(30W, 40W, 50W, 60W, 72W)	120-277V	0.25A@120V,0.12A@277V 0.32A@120V,0.15A@277V 0.41A@120V,0.18A@277V 0.48A@120V,0.21A@277V 0.58A@120V,0.24A@277V	3900 5160 6350 7560 9000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.76"L x 23.74"W x 1.38"H
-	-	NC-BPL24-M72W-CCT-S	2x4	(30W, 40W, 50W, 60W, 72W)	120-277V	0.25A@120V,0.12A@277V 0.32A@120V,0.15A@277V 0.41A@120V,0.18A@277V 0.48A@120V,0.21A@277V 0.58A@120V,0.24A@277V	3900 5160 6350 7560 9000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.76"L x 23.74"W x 1.38"H



SkyLine Series LED Back-lit Panel Light

Multiple Sensor Solutions Ready

Quick and Easy in-field installation of sensors.

(The sensor receptacle is pre-embedded in the profile frame.)



Multiple Emergency Solutions Ready



ACCESSORIES(SOLD SEPARATELY)



Surface Mount Kit



Suspension Kit



Junction Box



Emergency LED Driver



Sensor

MOUNT

NC-SM14 Surface Mount Kit 1x4

NC-SM22 Surface Mount Kit 2x2

NC-SM24 Surface Mount Kit 2x4

EMERGENCY


EM9 [INSTALLED] Emergency LED Driver, 9W, 90-Min Battery

EM15 [INSTALLED] Emergency LED Driver, 15W, 90-Min Battery

Sensor

Model Number	Sensor Type	Connector	Controller
HD08VR-M-1	Microwave	Audio Jack	Remote Control HD06R
HD08VR-MB-1 	Microwave		HAISEN BLUE APP
HD08VR-PB-1	PIR		Remote Control HD06R
HD08VR-PB-1 	PIR		HAISEN BLUE APP

DIMENSIONS

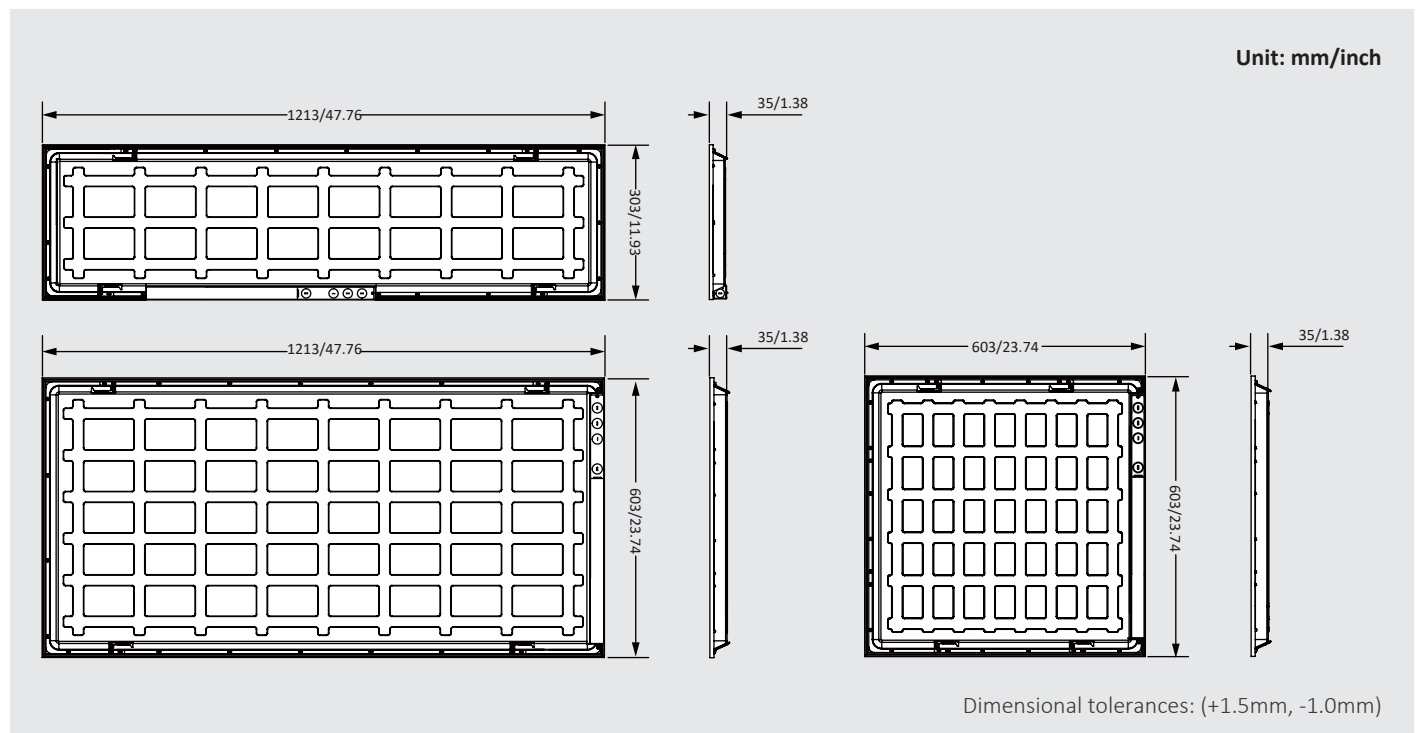




SkyLine Series

LED Back-lit Panel Light



PHOTOMETRIC DATA

Polar Curve


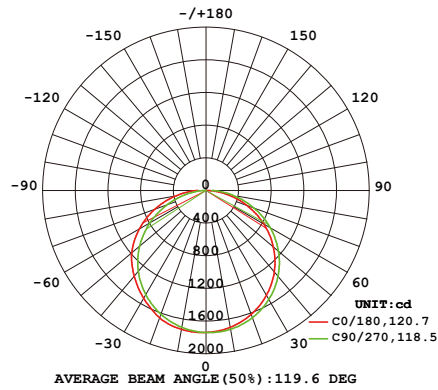


1x4


Cone Chart

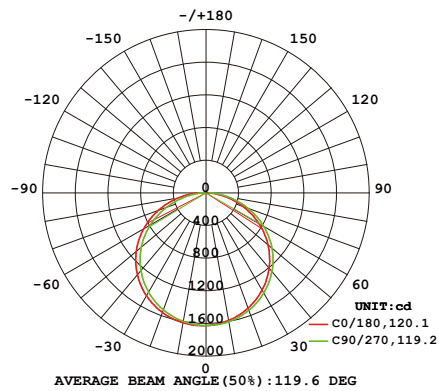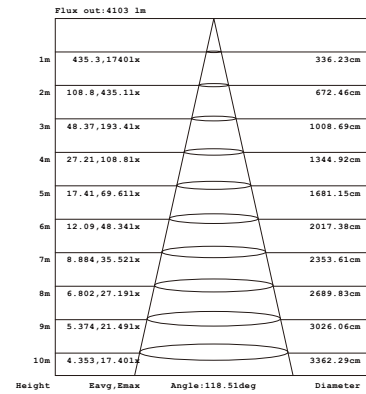

2x2

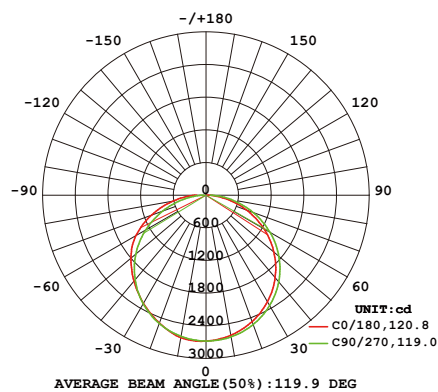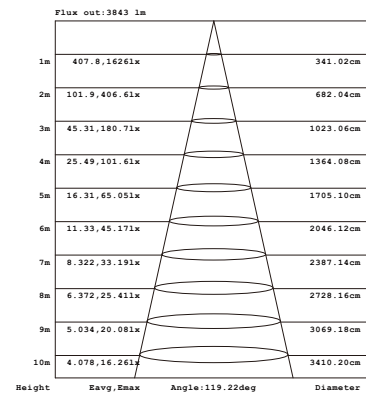

2x4

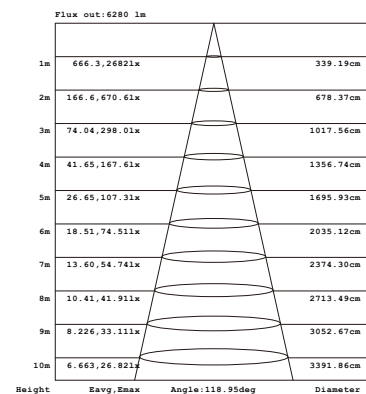

PACKING INFO

Catalog Number	Product Weight (kg) N.W/PC	Package Weight (kg)		Q'ty/CTN (PCS)	Carton Size(mm)	40HQ (PCS)
		N.W/CTN	G.W/CTN			
NC-BPL14-M40W-CCT	1.89	7.56	9.19	4	1240*145*330mm (48.82"*5.71"*13")	3780
NC-BPL22-M40W-CCT	1.7	6.8	7.6	4	630*145*630mm (24.8"*5.71"*24.8")	4320
NC-BPL24-M50W-CCT NC-BPL24-M72W-CCT	3.25	13	15.22	4	1240*145*630mm (48.82"*5.71"*24.8")	2304