



## Option 1: Flush mounting for a 50 mm (1.96") cutout

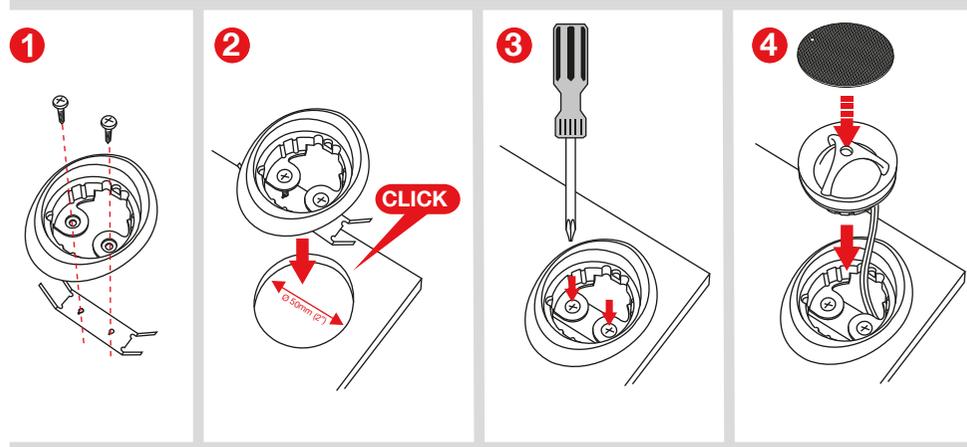

## Option 2: Surface mounting

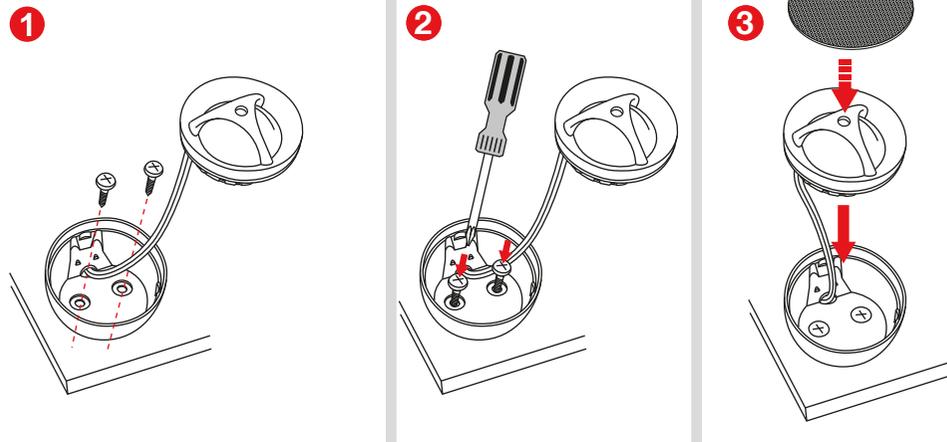


## Specifications

2-Way System		
Nominal Impedance	4 ohm	
Power Handling	90W	
Max. Transient Power Handling	180W	
Sensitivity (2.83V/1M)	94dB	
Frequency Response	60-22,000 Hz	
Voice Coil Diameter	Woofer: 30mm (1.181")	Tweeter: 25mm (1")
Voice Coil Wire	Woofer: CCAW	Tweeter: CCAW
Magnet System	Woofer: Hybrid magnet system	Tweeter: Neodymium
Mounting Depth	Woofer: 63mm (2.5")	Tweeter: 20mm (0.8")

Morel operates a policy of continuous design improvement, consequently specifications are subject to alteration without prior notice.


[www.morelhifi.com](http://www.morelhifi.com)

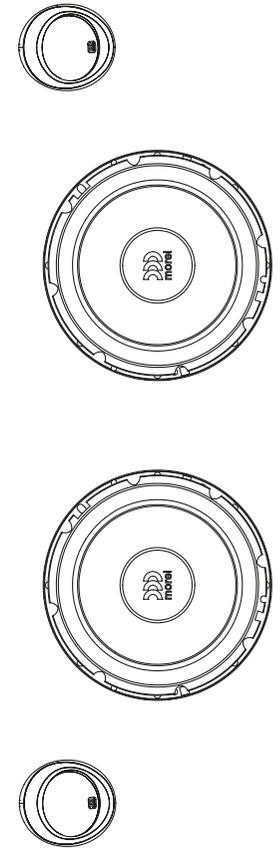


**maximo** ultra 602HE MKII  
Car Audio Component Speaker System




### Content - Tweeter

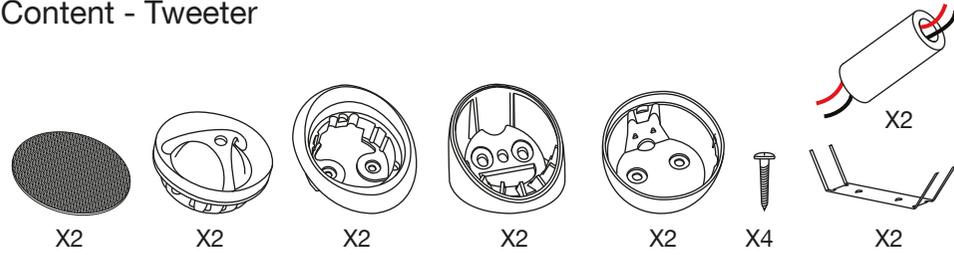


### Content - Woofer

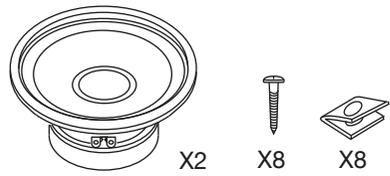

### Woofer mounting

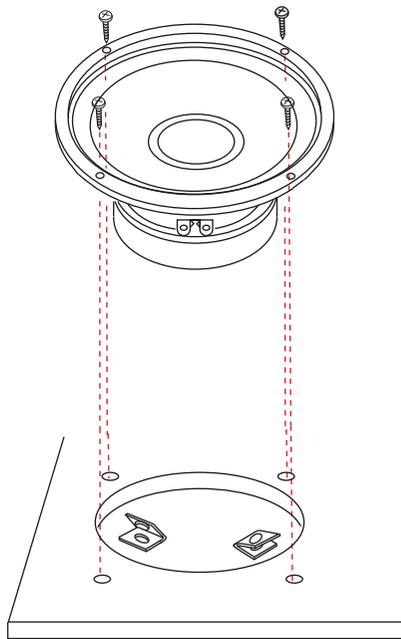

### Crossover Connection

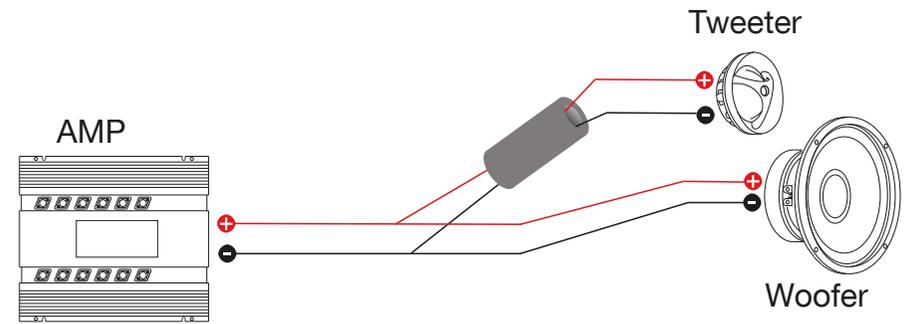

### Tweeter surface mounting

