

SRP-330II

3 inch Thermal POS Printer



Retail



Restaurants
& Bars

Ticketing



Banking

Durable and Cost-Efficient

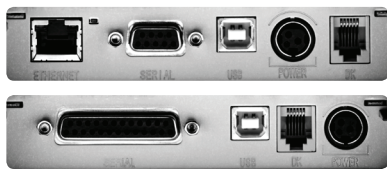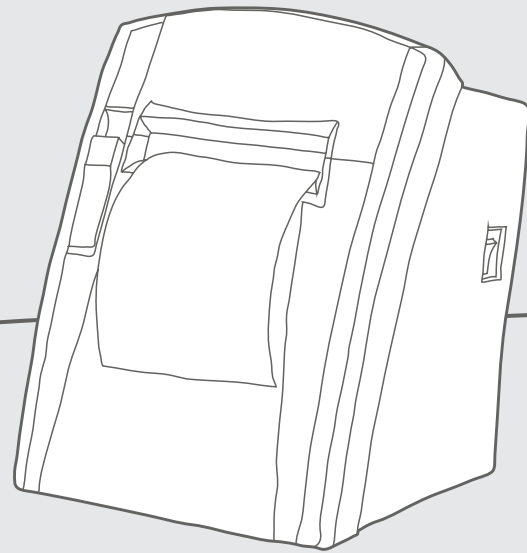

Cost-Efficiency

- All in one Plus™ Interface
 - Triple Interface
USB V2.0 FS + Ethernet + Serial
 - Dual Interface
USB V2.0 FS + Serial
USB V2.0 FS + Parallel
USB V2.0 FS + SD
- Paper saving mode, reducing the length of a receipt up to 25%

220
mm/sec

TPH
150Km



Reliable Printing Performance

- Printing speed up to 220 mm/sec
- High reliability mechanism :
150 km TPH & 1.5 Million cuts Auto Cutter
- 203 dpi supported



Easy Tracking™



User-Friendly Design

- Stand-alone or space-saving wall-mount use
- 2" or 3" paper choice
- 2 inch partition included
- Anti-jam guide
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer

SRP-330II

3 inch Thermal POS Printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

Up to 220 mm/sec

Print Resolution

SRP-330II: 180 dpi

SRP-332II: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm

Optional 58 mm (N type)

Media Roll Diameter

Up to 80 mm

Media Thickness

0.05 ~ 0.08mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

145 x 198 x 146 mm

(5.72 x 7.79 x 5.74 inch)

Weight

1.37 kg (3.02 lbs.)

Power

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

① USB V2.0 FS + Ethernet + Serial

② USB V2.0 FS + Serial

③ USB V2.0 FS + Parallel

④ USB V2.0 FS + SD

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

150 km

Auto Cutter

1.5 Million Cuts

***** Specified Paper**

- TF50KS-E (Paper thickness: 65µm)

: Nippon Paper industries Co., Ltd.

- PD 150R (Paper thickness: 75µm)

: New Oji Paper Mfg. Co., Ltd

- PD 160R (Paper thickness: 75µm)

: New Oji Paper Mfg. Co., Ltd.

- P350 (Paper thickness: 62µm)

: Kansaki Specialty Paper, Inc. (USA)

Software

Emulation

BXL / POS

Driver / Utility

• Windows Driver

• OPOS / JPOS Driver

• Linux / Mac CUPS Driver

• Virtual COM USB / Ethernet Driver

• Utility Program

SDK / Plugin

• Android / iOS / Windows SDK

• Linux SDK

• Xamarin SDK

• Chrome SDK

• Cordova Plugin

Browser / App

• Windows mPrint Browser (All)

• mPrint App (Android, iOS)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-330II: - Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-332II: - Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 33 page

International: 32

Graphics

Supporting user-defined fonts, graphics,

formats, and logos

Barcode Symbologies

1D: Coda Bar, Code39, Code93, Code128,

EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Accessories

Standard Accessories

2 inch Partition (58 mm), USB A-B Cable 1.8m

Optional Accessories

External buzzer, B-Melodist



BR_SRP-330II_EN_JUL19_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co., Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com

