



1D Imager
Barcode Scanner



DuraScan® D700

Linear Barcode Scanner

The DuraScan D700 is a linear Bluetooth® barcode scanner built for mobility and durability. It is IP54 compliant for dust and water resistance, and the long-lasting battery is field replaceable - ideal for warehousing and manufacturing application customers. The scanner is MFi certified and our Capture SDK enables native app support. The D700 is also fully compatible with Android and Windows with Capture SDK versions available.

The D700 reads all linear 1D barcodes from paper and screen. It features great ergonomics and fits perfectly in your hand. It is designed for comfort and extended use; it is lightweight, highly durable and small enough to fit in your pocket. The D700 is fully backwards compatible with prior versions of Socket Mobile's SDK and can be used immediately with any application using native scanning support. To enjoy optimal reliability and performance from the D700 it is recommended that users check with their app provider to ensure they have upgraded to the latest version of Capture SDK.



Features

- **Certified by Apple® for iOS devices (iPad®, iPhone®, iPod Touch®) and compatible with Android, Windows®, Mac and Linux.**
- **Scanning** – Reads all 1D barcodes on paper or screen, quickly and accurately, including most faded and smudged barcodes.
- **Bluetooth Wireless Technology** - Dependable Bluetooth connection to iOS, Android and Windows 10 devices. Auto-reconnection maintains even in different environments.
- **Exceptional Ergonomics** – Small, light and fits perfectly in the hand for comfortable use over extended periods of time.
- **Battery Friendly®** - Long-lasting (over 16 hours), rechargeable, replaceable and field-serviceable batteries.
- **User Indicators** – Intuitive LEDs for Bluetooth connection, battery level and scanning status.
- **User Feedback** - Audible tones and hand pulsation.
- **Rugged Design** – IP54 rating for dust and water splashing; withstands multiple drops.
- **Compatible with Android and Windows devices and applications**
- **Native App Support** – Socket Mobile's Capture SDK enables easy native app integration in your applications to improve business productivity.
- **Wearable** - Wrist strap included. *Optional: Holster and Durable Retractable Clip available.*
- **Designed and made in the USA**
- **1-Year Warranty**
- **Developer Support Available**

Physical Characteristics



- (1) DuraScan D700, 1D Linear Barcode Scanner and Rechargeable Battery (pre-installed)
- (1) Charging Cable
- (1) Wrist Strap
- (1) Get Started insert



**Socket Mobile
Companion App
Download for Free!**

The D700 is available in 4 colors:

- Black(SKU# CX3756-2408)
- Gray (SKU# CX3357-1679)
- Red (SKU# CX3736-2388)
- White(SKU# CX3746-2398)

Optional Accessories

Charging Stand



Great for using AutoScan Mode

Charging Cradle



Perfect for wall mounting

Charging Dock



Ideal as a desktop charger

Durable Retractable Clip



Provides quick access to scanner

Holster



Safe and accessible placement

Scanner & Phone Holder



One-handed solution

Warranty

Scanner:	Standard one year limited warranty for barcode scanners
Accessories:	90 days for batteries, charging cable and wrist strap
Extended Warranty: (sold separately)	www.socketmobile.com/socketcare




Technology: 1D Barcode Linear Imager

Scanning Performance

Default Barcode Symbologies:	Code 39, Code 128, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 Databar Expanded, GS1 DataBar Limited, GS1-128, Interleaved 2 of 5, UPC-A, UPC-E1
Supported Barcode Symbologies:	Bookland EAN, Chinese 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 Databar Expanded, GS1 DataBar Limited, GS1-128, Interleaved 2 of 5, Matrix 2 of 5, UPC-A, UPC-E1
Scan Angle:	53°
Optical Resolution:	5 mil/0.1 mm
Print Contrast:	30% minimum

Reading Distance:

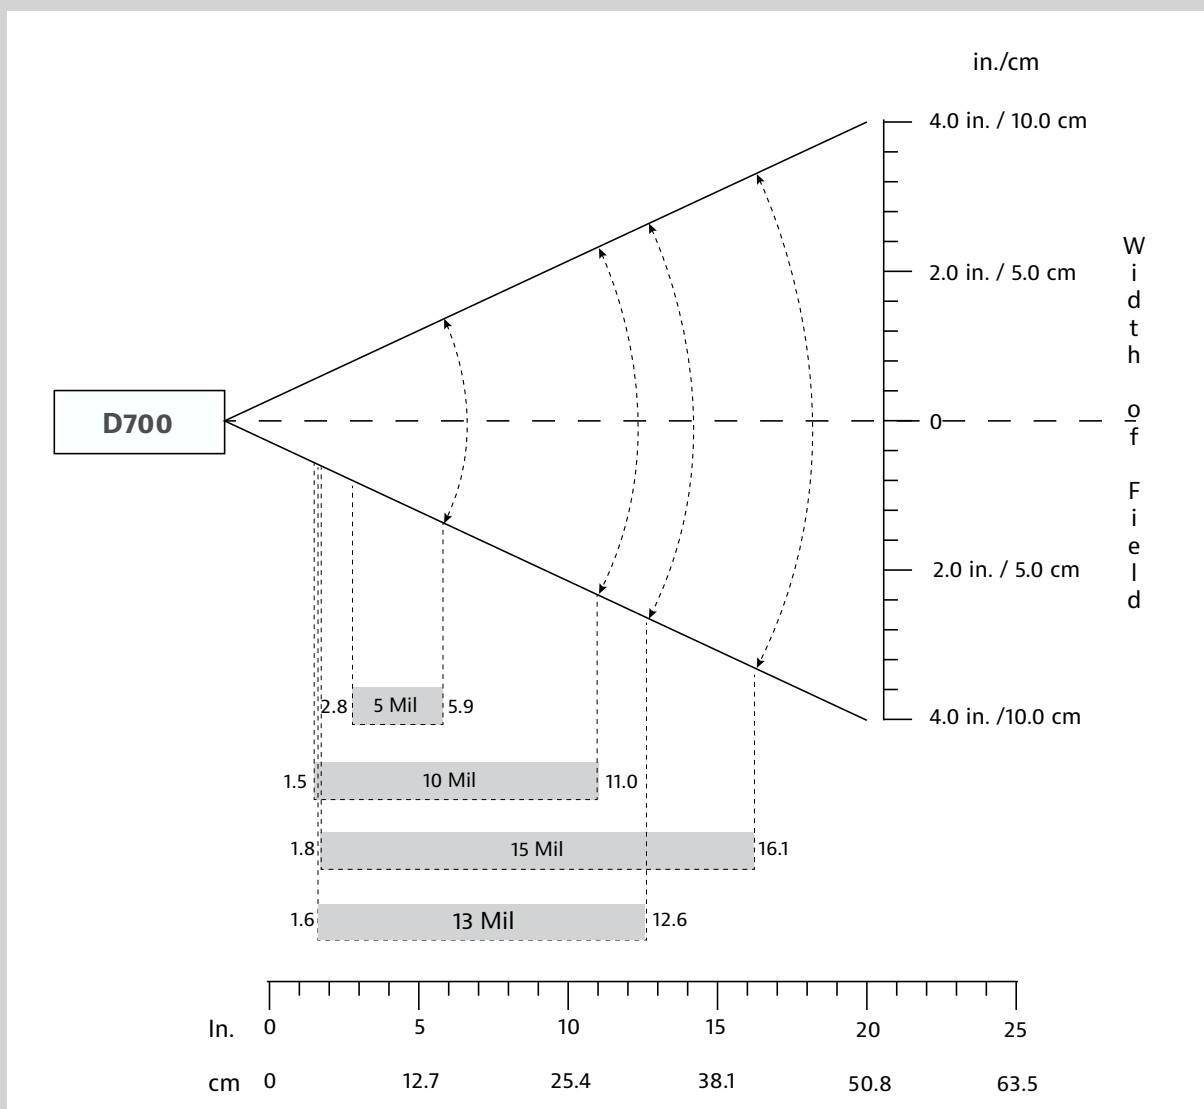

Decode Ranges:

1D codes 3.5 to 41 cm (1.4 to 16.1 in) Resolution Depends on barcode size, symbology, label media.

Resolution	Near	Far
5 Mil	2.8 in./ 7 cm	5.9 in./ 15 cm
10 Mil	1.4 in./ 3.5 cm	11.0 in./ 28 cm
15 Mil	1.8 in./ 4.5 cm	16.1 in./ 41 cm
13 Mil	1.6 in./ 4.0 cm	12.6 in./ 32 cm

Battery Type:	1400 mAh Lithium Ion Polymer (replaceable battery)
Charge Time:	6 Hours
Battery Life:	500 charge-discharge cycles
Battery Life - Per Full Charge:	Battery Friendly with standby time: over 26 hours Active Scan Time: 106,000 scans within 10 hours (based on 2 scans every 1 second) or 17,000 scans within 19 hours (calculation based on 1 scan every 4 seconds)
Note:	Battery life varies depending on ambient temperature, ambient light and age of battery. <i>For more battery information click here.</i>
Number of Batteries Used:	1
Weight of Battery:	35g
Percentage Lithium:	26.5%
Battery mAh:	1400 mAh
Number of Cells Per Battery:	1
Watt Hours Per Battery:	5.55
Type of Cell (ex.AA):	Proprietary
Chemical Composition (ex. Alkaline):	Lithium-polymer
Lithium Content:	9.32g
Battery Voltage:	3.7v
Hazmat UN Number:	UN3481, P.I. 967
ROHS Compliance Indicator:	Yes, included with scanner
Country of Origin:	China
Commodity Code:	8507.60.0000

Bluetooth (wireless connection)

Bluetooth Radio:	Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption
Bluetooth Range:	Typical range is 10 meters (33 ft.) depending on environment, range limit is usually due to the Host Device (phone, tablet or notebook)
Bluetooth Profiles:	Basic Mode - Human Interface Device (HID)*, App Mode - Serial Port Profile (SPP) and App Mode - MFi-SPP. Some Operating Systems or smartphone/tablet models may support only one profile. <i>*By default, the scanner is set to Basic Mode (HID).</i>

Apple, Android and Windows PC with Bluetooth Classic HID are compatible with all Socket Mobile scanners.
*Chromebook and Linux supports HID mode only.

User Environment

Ambient Light:	From 0 to 100 000 lux From pitch black to direct sun light
Operating Temperature:	-20° to 50° C (-4° to 122° F)
Storage Temperature:	-40° to 70° C (-40° to 158° F)
Relative Humidity:	95% at 60° C (140° F) (non-condensing)
Sealing:	IP54 (Ingress Protection rating for dust and water) EN60529
Tumble Specification:	2,500 cycles at 3.3 ft. (1 m) to metal plate, IEC6008-2-31, IEC60068-2-32 3
Drop Specification:	6 drops to concrete - 1 on each side at 6.6 ft. (2 m)

Operating System Compatibility

Android OS: Basic Mode (HID)* and App Mode (SPP)

Mac OS: Basic Mode (HID)* only

Apple iOS: Basic Mode (HID)* and App Mode (MFi-SPP)

Windows OS 10 - Basic Mode (HID)* and App Mode (SPP)

Compatible with devices supporting Basic Mode (HID)* protocol. Supported keyboard languages - ANSI, English UK, English, French, German, Italian, Japanese, Polish, Spanish and Swedish

**By default, the factory settings of the Socket Mobile Scanners are set to Basic Mode (keyboard emulation: HID). In order to use the scanner with an application using Capture SDK, the scanner must be configured in Application Mode (Bluetooth Serial Port Profile: SPP)*

iOS

iPadOS

macOS



Common Uses

Retail/Point of Sale

Warehouse management

Office use

Shipping and Receiving

Healthcare

Field Sales/Service

Mobile Tracking

Manufacturing

Certification & Regulatory

Bluetooth SIG: Declaration ID: D030473 QD ID: 82009

Electrical Safety: Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2

Environmental: Environmental: RoHS EN 50581

EMI / RFI: FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC
FCC ID: LUBD700
IC ID: 2925A-D700

LED Safety: IEC 60825-1, EN 60825-1

ISO 9001 Accreditation



socketmobile.com		sales@socketmobile.com		sales-japan@socketmobile.com	
Worldwide:	+1 510 933 3300	Asia Pacific:	+1 510 933 3122	Japan:	+8190 9808 0518
North America:	+1 800 552 3300	Germany:	+41 62 834 07 80	Japan (Toll Free):	+81 (800) 9190303
EMEA & Russia:	+41 62 834 07 80	Switzerland:	+41 62 834 07 80	Latin America:	+1-510-933-3153
France:	+33 (801) 840504	Switzerland (Toll Free):	+41 (800) 898003	Taiwan (Toll Free)	+886 00801491497
Malaysia (Toll Free)	+60 (1800) 818234	UK/Ireland/South Africa:	+44 (800) 0487363		

©2021 Socket Mobile, Inc. All rights reserved. Socket®, the Socket Mobile logo, SocketScan®, DuraScan®, Battery Friendly® are registered trademarks or trademarks of Socket Mobile, Inc. Microsoft® is a registered trademark of Microsoft Corporation in the United States and other countries. Apple®, iPad®, iPad Air®, iPad mini®, iPad Pro®, iPhone®, iPod touch®, Objective-C®, Swift™, and Xcode® are registered trademarks of Apple, Inc., registered in the U.S. and other countries. The Bluetooth® Technology word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Socket Mobile, Inc. is under license. Other trademarks and trade names are those of their respective owners.