



DuraScan® D760



2D/1D Imager



Passport Reader



OCR-A / OCR-B / MICR E13B

Ultimate Barcode Scanner and Passport Reader

The DuraScan D760 is the latest and improved version of the ultimate Bluetooth® barcode scanner. Built for mobility and redesigned for improved durability, the D760 is IP54 compliant, ideal for travel and POS application customers where durability and indoor/outdoor flexibility is required. Travel merchants only need one device to scan purchased items and passports. In addition, Socket Mobile has added a field-replaceable battery based on customer feedback. The scanner is MFi certified and fully compatible with Android and Windows with different Capture SDK versions available.


The D760 reads OCR fonts, passports, travel IDs, DotCode and 2D/1D barcodes on paper and screen. It features great ergonomics, fits perfectly in your hand and is small enough to fit in your pocket. The D760 is fully backwards compatible with prior versions of Socket Mobile's SDK and can be used immediately with any application using native scanning support. To enjoy optimal reliability and performance from the D760, it is recommended that users check with their app provider to ensure they have upgraded to the latest version of Capture SDK.



Features

- **Certified by Apple® for iOS devices (iPad®, iPhone®, iPod Touch®) and compatible with Android, Windows®, Mac and Linux.**
- **Scanning** – Fast 2D and 1D barcode scanning with highly visible and safe LED aimer and omni-directional ability, allowing intuitive rapid scanning. Scans OCR A&B fonts, OCR USC, OCR passport and OCR MICR (E13B) fonts. Scans on paper or screen.
- **Bluetooth® Wireless Technology** - Compatible with iOS, Android and Windows devices with long-range Bluetooth connection.
- **Exceptional Ergonomics** – Small, light and fits perfectly in the hand for comfortable use over extended periods of time.
- **Long-Lasting, Replaceable, Rechargeable Battery** - Power to last over 16 hours
- **User Indicators** – Intuitive LEDs for Bluetooth connection, battery level and scanning status.
- **User Feedback** - Audible tones and pulsation.
- **Rugged Design** – IP54 rating for dust and water splashing; withstands multiple drops to concrete
- **Compatible with Android and Windows devices and applications**
- **LED Aimer** - Bright, rectangular illumination field with LED pointer for precise aiming.
- **Decoding Ability** - Reads damaged and poorly printed barcodes.
- **Native App Support** – Socket Mobile's Capture SDK enables easy native app integration in your applications to improve business productivity.
- **Wearable** - Wrist strap included. Optional: Holster and Durable Retractable Clip available.
- **Designed and Assembled in the USA**
- **Developer Support Available** - The Capture SDK is available with subscription.
- **1-Year Warranty**
- **Developer Support Available**

Physical Characteristics

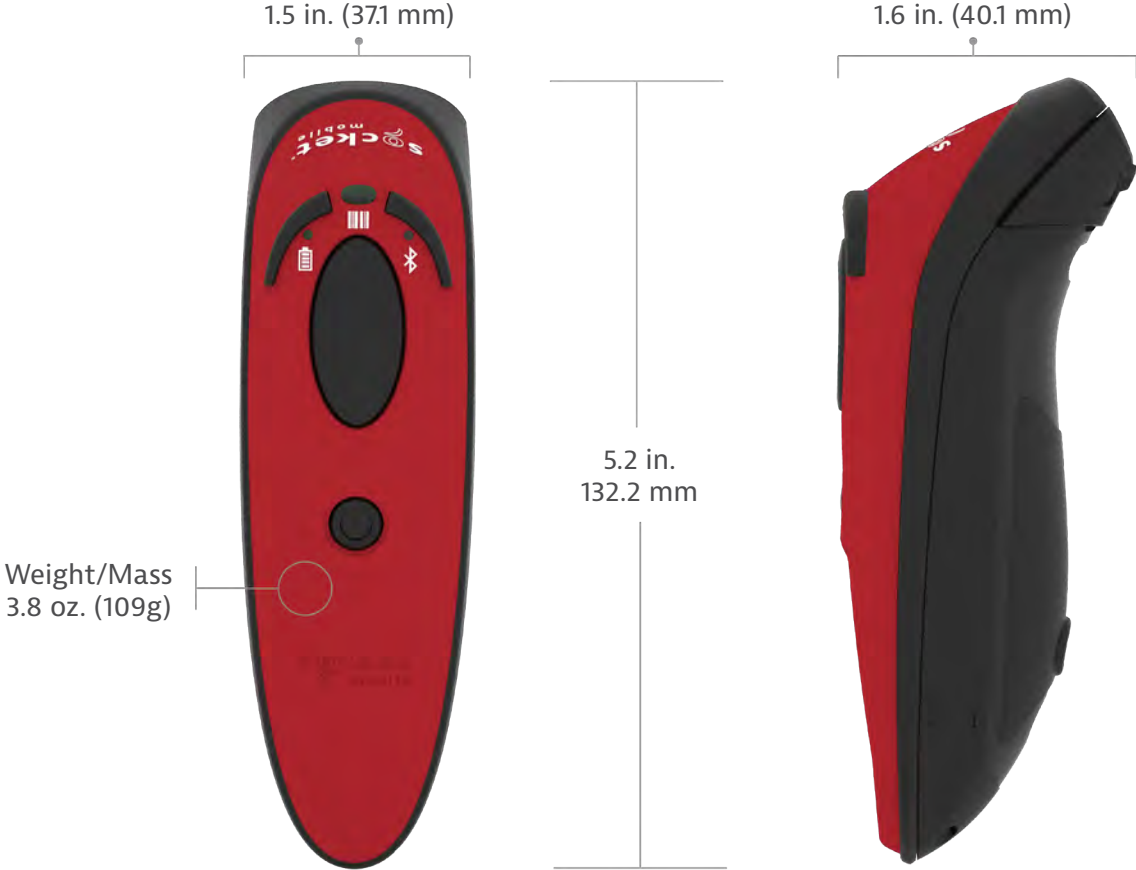

Single Package includes

- (1) DuraScan D760 , 1D Ultimate Barcode Scanner and Rechargeable Battery (pre-installed)
- (1) Charging Cable
- (1) Wrist Strap
- (1) Get Started insert



Socket Mobile Companion
Download for Free!

The D760 is available in 4 colors:

- Black (SKU# CX3764-2416)
- Gray (SKU# CX3435-1890)
- Red (SKU# CX3744-2396)
- White (SKU# CX3754-2406)

Optional Accessories

Charging Stand



Great for using AutoScan Mode

Charging Cradle



Perfect for wall mounting

Charging Dock



Ideal as a desktop charger

Durable Retractable Clip



Provides quick access to scanner

Holster



Safe and accessible placement

Scanner & Phone Holder



One-handed solution

Default Barcode Symbologies:

1D Symbologies: Codabar, Code 39, Code 93, Code 128, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, UPC A, UPC EO

2D Symbologies: Aztec, Data Matrix, Maxicode, Micro PDF417, PDF417

Postal Codes: Australia Post

OCR Typeface: OCR B ICAO Travel Documents

Supported Barcode Symbologies:

1D Symbologies: Bookland EAN, Chinese 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, Composite CC-A/B, Composite CC-C, Composite TLC, Discrete 2 of 5, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, ISSN EAN, Matrix 2 of 5, MSI, UPC/EAN/JAN, UPC A, UPC EO

2D Symbologies: Aztec, Data Matrix, DotCode, Maxicode, Micro PDF417, MicroQR, PDF417, QR Code

Postal Codes: Australia Post, Han Xin, Japan Postal, KIX Code, Maxicode, Netherlands, UPU FICS Posta, US Planet, US Postnet, USPS 4CB/One Code/Intelligent Mail

OCR Typeface: OCR-A, OCR-B, MICR-E13B, US currency serial number

Watermark Symbology: Digimarc

Scan Angle:

42° (Horizontal) -28° (Vertical)


Sensor Resolution:

640 horizontal x 400 vertical pixels

Print Contrast:

Down to 25%-20%

Reading Distance:

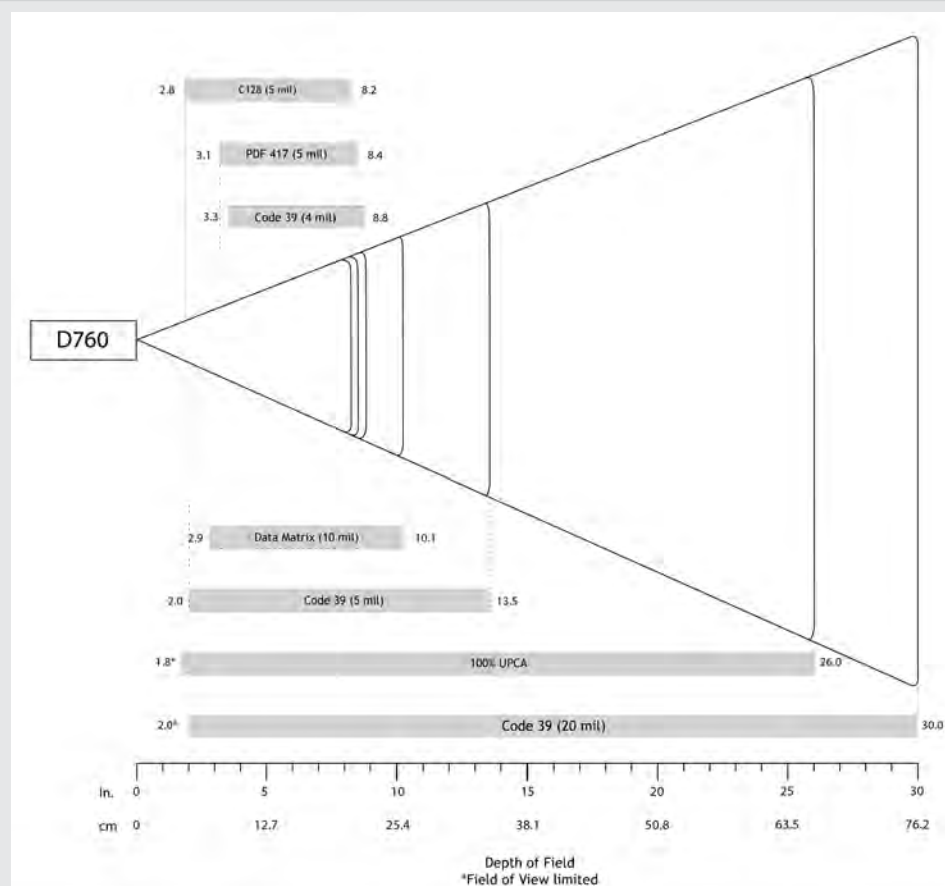

4.6 to 76.2 cm (1.8 to 30.0 in.) Depends on barcode size, symbology, label media

Decode Ranges:

	Near	Far
4 mil Code 39	3.3 in/8.4 cm	8.8 in/22.4 cm
5 mil Code 128	2.8 in/7.1 cm	8.2 in/20.8 cm
5 mil Code 39	2.0 in/5.08 cm	13.5 in/34.3 cm
10 mil Data Matrix	2.9 in/7.4 cm	10.1 in/25.7 cm
100% UPC A	1.8 in/4.6 cm*	26.0 in/66.0 cm
20 mil Code 39	2.0 in/5.08 cm*	30.0 in/76.2 cm

Technology:	2D/1D Barcode Imager and OCR character reader
Light Source:	Hyper Red 660 nm (nanometer) LED
Aimer:	610 nm LED

Battery

Battery Type:	Replaceable 1400 mAh Lithium - Ion Battery
Charge Time:	6 Hours
Battery Life - Per Full Charge:	Standby time: over 20 hours Active Scan Time: 85,000 scans within 9 hours (based on 2 scans every 1 second) 17,000 scans within 19 hours (based on 1 scan every 4 seconds)
Note:	Battery life varies depending on ambient temperature, ambient light and age of battery. <i>For more battery information click here.</i>
Number of Batteries Used:	1
Weight of Battery:	35g
Percentage Lithium:	26.5%
Battery mAh:	1500 mAh
Number of Cells Per Battery:	1
Watt Hours Per Battery:	5.55
Type of Cell (ex. AA):	Proprietary
Chemical Composition (ex. Alkaline):	Lithium-polymer
Lithium Content:	9.32g
Battery Voltage:	3.7v
Hazmat UN Number:	UN3481, P.I. 967
ROHS Compliance Indicator:	Yes, included with scanner
Country of Origin:	China
Commodity Code:	8507.60.0000

Bluetooth (wireless connection)

Bluetooth Radio:	Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption
Bluetooth Range:	Up to 10 meters (33 ft.) depending on environment, range limit is usually due to the Host Device (phone, tablet or notebook)
Bluetooth Profiles:	Basic Mode - Human Interface Device (HID)*, Application Mode - Serial Port Profile (SPP) and Application Mode - MFi-SPP. Some Operating Systems or smartphone/tablet models may support only one profile. <i>*By default, the scanner is set to Basic Mode (HID).</i>

Apple, Android and Windows PC with Bluetooth Classic HID are compatible with all Socket Mobile scanners.

*Chromebook and Linux supports HID mode only.

User Environment

Ambient Light:	From 0 to 100 000 lux, From pitch black to direct sun light
Operating Temperature:	0° to 45° C (32° to 113° F)
Storage Temperature:	-5° to 70° C (-22° to 158° F)
Relative Humidity:	95% at 60° C (140° F) (non-condensing)
Sealing:	IP54 (Ingress Protection rating for dust and water) EN60529
Tumble Specification:	2,500 cycles at 3.3 ft. (1 m) to metal plate, IEC6008-2-31, IEC60068-2-32 3
Drop Specification:	6 drops to concrete - 1 on each side at 6.6 ft. (2 m)

Operating System Compatibility

Android OS - Basic Mode (HID)* and Application Mode (SPP)	Mac OS and Linux - Basic Mode (HID)* only
Apple iOS - Basic Mode (HID)* and Application Mode (MFi-SPP)	Windows OS 10 - Basic Mode (HID)* and Application Mode (SPP)
Compatible with devices supporting Basic Mode (HID)* protocol	Supported Language Setting in Basic Mode (HID): ANSI, English UK, English, French, German, Italian, Japanese, Polish, Spanish and Swedish

*By default the scanner is in Basic Mode (HID). No software installation required.

iOS

iPadOS

macOS



Certification & Regulatory

Bluetooth SIG:	Declaration ID: D030473 QD ID: 82009
Electrical Safety:	Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2
Environmental:	Environmental: RoHS EN 50581
EMI / RFI:	FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC FCC ID: T9J-RN41-3 IC ID: 6514A-RN413 Telec ID: 201-135280
LED Safety:	IEC 62471, EN 62471 (EXEMPT GROUP)



Warranty

Scanner:	Standard one year limited warranty for barcode scanners
Accessories:	90 days for batteries, charging cable and wrist strap
Extended Warranty: (sold separately)	www.socketmobile.com/socketcare



Common Uses

Retail/Point of Sale	Warehouse management	Transportation
Office use	Shipping and Receiving	Gaming
Healthcare	Field Sales/Service	Inventory
Mobile Tracking	Banking	Manufacturing

socketmobile.com

Worldwide: +1 510 933 3000
North America: +1 800 552 3300
EMEA & Russia: +41 62 834 07 80
France: +33 (801) 840504
Malaysia (Toll Free): +60 (1800) 818234

sales@socketmobile.com

Asia Pacific: +1 510 933 3122
Germany: +41 62 834 07 80
Switzerland: +41 62 834 07 80
Switzerland (Toll Free): +41 (800) 898003
UK/Ireland/South Africa: +44 (800) 0487363

sales-japan@socketmobile.com

Japan: +8190 9808 0518
Japan (Toll Free): +81 (800) 9190303
Latin America: +1-510-933-3153
Taiwan (Toll Free): +886 00801491497

©2021 Socket Mobile, Inc. All rights reserved. Socket®, the Socket Mobile logo, SocketScan®, DuraScan®, Battery Friendly® are registered trademarks or trademarks of Socket Mobile, Inc. Microsoft® is a registered trademark of Microsoft Corporation in the United States and other countries. Apple®, iPad®, iPad Air®, iPad mini®, iPad Pro®, iPhone®, iPod touch®, Objective-C®, Swift™, and Xcode® are registered trademarks of Apple, Inc., registered in the U.S. and other countries. The Bluetooth® Technology word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Socket Mobile, Inc. is under license. Other trademarks and trade names are those of their respective owners.