

CUSTOMER		<b>SPECIFICATION</b>	TYPE	ADAPTOR
DESIGNED NO.			PART	

THIS SPECIFICATION SUBJECT TO:

1. ELECTRICAL CHARACTERISTICS:

1.1 INPUT RATED VOLTAGE AND FREQUENCY: / 120 V / 60 Hz.

1.2. EXCITING CURRENT: / 225 mA MAX (AT 1.1 ITM).

1.3. OUTPUT VOLTAGE REGULATION:

LEADS NO.	FULL LOAD RATED VOLT.	RATED CURRENT	UNLOADED VOLT.	RIPPLE VOLT.
	AC24V±5%	2500mA	≤AC30V	


2. HI-POT TEST: P-S 1.5 KV, P-C 1.5 KV, S-C: 0.6 KV(AC 3mA 1MIN).

3. INDUCED VOLTAGE: ALL SECONDARY WINDINGS OPEN, INPUT PRIMARY V Hz. (30S), SHALL WITHSTAND WITHOUT BREAKDOWN.

4. INSULATION TEST: RI-o: 10 MΩ(DC 500V).

5. TEMPERATURE RISE: 75 °C MAX ( RESISTANCE METHOD).

6. APPEARANCE DRAWING:

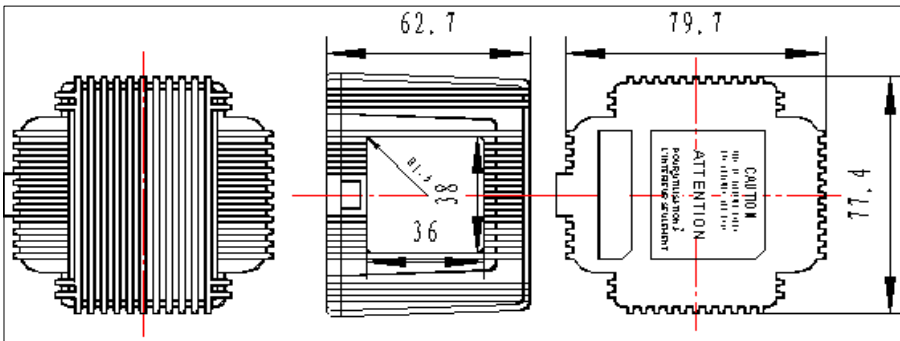


I/P CORD:  
W3ASPT2AWG18#6FT

O/P CORD:  
W45AWG20#300mm

O/P PLUG:  
Connection pole

7. CIRCUIT DIAGRAM:

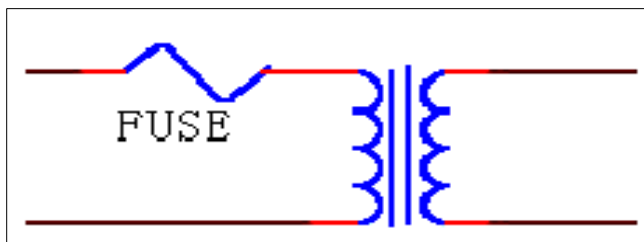

8. OTHERS:

设计	安规	审核	批准	页次/PAGE
				/