

Platinum Professional Level 8 Channel NVR 1U LTN8708K-P8




Key Features:

- Up to 8 network cameras can be connected
- Support live view, storage, and playback of the connected camera with up to the resolution of 8 megapixels
- Up to 8 independent PoE network interfaces for different models
- Up to 2 SATA hard disks can be connected with up to 6TB capacity for each
- Support HDD quota and group mode

Rear Panel:

- | | |
|---|---|
| 1. Audio In | 7. USB 3.0 Interface |
| 2. Audio Out | 8. GND |
| 3. VGA Interface | 9. 100 to 240 VAC power supply |
| 4. HDMI Interface | 10. Power Switch |
| 5. Controller port,
Alarm In/Alarm Out | 11. Network Interfaces with
PoE Function |
| 6. LAN Network Interface | |

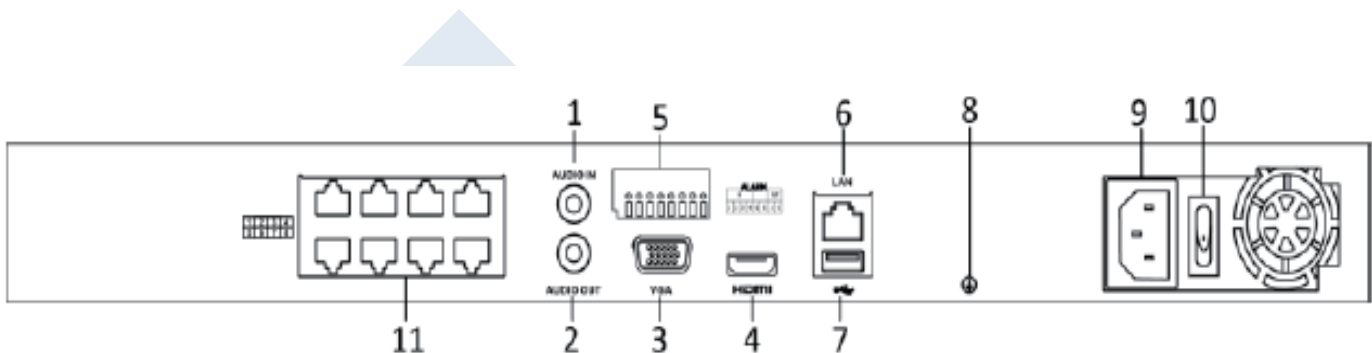

Platinum Professional Level 16 Channel NVR 1U

LTN878K-P8

Video/Audio Input	
IP video Input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	80Mbps
Outgoing bandwidth	160Mbps
Remote connection	128
Video/Audio Output	
Recording resolution	8MP/6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
HDMI output	4K (3840 × 2160)/20Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Decoding format	H.265/H.264/H.264+/MPEG4
Recording resolution	8MP/6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	8-ch
Capability	2-ch @ 4K, or 8-ch @ 1080p
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
U	TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
USB Interface	1 × USB 2.0 and 1 × USB 3.0
Alarm in/out	4/1
PoE	
Interface	8RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Max. Power	≤ 120W
Supported standard	IEEE 802.3 af/at
GENERAL	
Power Supply	100~240V AC
Consumption	≤ 15W
Working Temperature	14° F - 131° F (-10° C ~ +55° C)
Working Humidity	10% - 90%
Casing	19-inch rack-mounted 1U chassis
Dimensions (WxDxH)	445 × 290 × 45mm (17.5 × 11.4 × 1.8 inch)
Weight	≤ 1 kg (2.2 lb)