


SoundPath

TRI-BAND WIRELESS AUDIO
ADAPTER

SVS

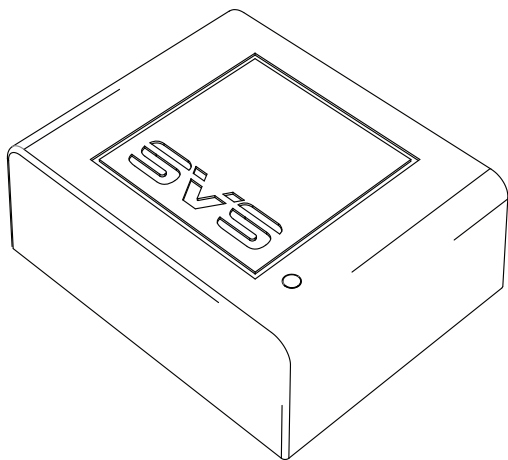

Owner's Manual

(Additional Tri-Band Wireless Receiver)

Thank you for choosing SVS!

The following instructions will help you setup additional Tri-Band wireless Receivers with your **SVS SoundPath Tri-Band Wireless Audio Adapter**. Before proceeding, please complete the setup and pairing instructions for the primary Transmitter/Receiver kit.

Installation requires only a few simple steps. If you have questions about subwoofer or speaker placement, system optimization or installing the SVS SoundPath Tri-Band Wireless Audio Adapter, please contact the SVS Sound Experts tech support 7-days-a-week.

custservice@svsound.com | 877.626.5623 | www.svsound.com

Adding Additional Wireless Receivers

A single SVS SoundPath Tri-Band Wireless Audio Adapter Transmitter can wirelessly connect and transmit a signal to up to six (6) Receivers.



Before Pairing

Confirm the primary SoundPath Tri-Band Wireless Audio Transmitter and Receiver are paired. Successful pairing will be indicated by a steady blue light on both the transmitter and receiver.

Steps for Pairing Additional Receivers with Transmitter

1. Connect additional Receiver to subwoofer or speakers via RCA cable and connect power cord via USB or AC power outlet. A slow flashing light indicates the unit is not paired.
2. Press and hold the PAIR button located on the back of the Receiver until the blue LED light located on the top of the unit flashes quickly.
3. Within 30 seconds, press and hold the PAIR button located on the back of the Transmitter.
4. When your Transmitter and additional Receiver are paired, the wireless status lights on the top of both units will turn solid blue.
5. Repeat steps for any additional Receivers.

