

Non-Contact  
Temperature  
Screening Imager

# The Next Level Of Protection Against COVID-19



Powered by:

**BeMotion** INC

Distributed by :

**MTN SHOP**







# The Problem

After September 11th 2001, security protocols forever changed and the security industry adapted new standards for protecting public spaces and transportation.

The **Coronavirus** is having a similar impact on Health Monitoring as non-contact temperature screening becomes critical in mitigating the potential spread of the virus.

Numerous global epidemiologists predict an increase in frequency of future global pandemics. We need to be prepared to avoid economic shutdowns in the future.

Distributed by :

# MTN SHOP







## The Solution

**BeMotion Inc. – The new standard in Non-Contact Human Temperature Screening Technology:**

- State of the art Intelligent Thermal Imaging Technology.
- Instant automatic detection of elevated body temperature.
- Auto-alarm feature for over-threshold subjects.
- The (AI) Screening Technology can measure temperature even if subject is wearing **sunglasses, hat & mask.**

Distributed by :

**MTN SHOP**







## DUO32

### Individual Smart Non-Contact Temperature Screening:

- 8 inch Hi-Resolution display
- Full view LCD of Human Face
- Auto-alarm within 0.5 seconds
- $\pm 0.8^{\circ}$  F Accuracy
- 99% Accurate
- 30,000 Face Library

Distributed by :







## DUO Video Series Dual Vision Non-Contact

### Temperature Screening Technology:

#### Max screening of People per Minute (PPM)

- DUO 400: Up to 400+ (PPM)
- DUO 650: Up to 500+ (PPM)

#### Measuring distance:

- DUO 400: 3ft to 19.6ft
- DUO 650: 3ft to 24.6ft
- Auto-alarm within 0.5 seconds
- No Blackbody required

- The (AI) Face Detection scans five different points of the face

- The system is 99% Accurate.




Distributed by :

**MTN SHOP**





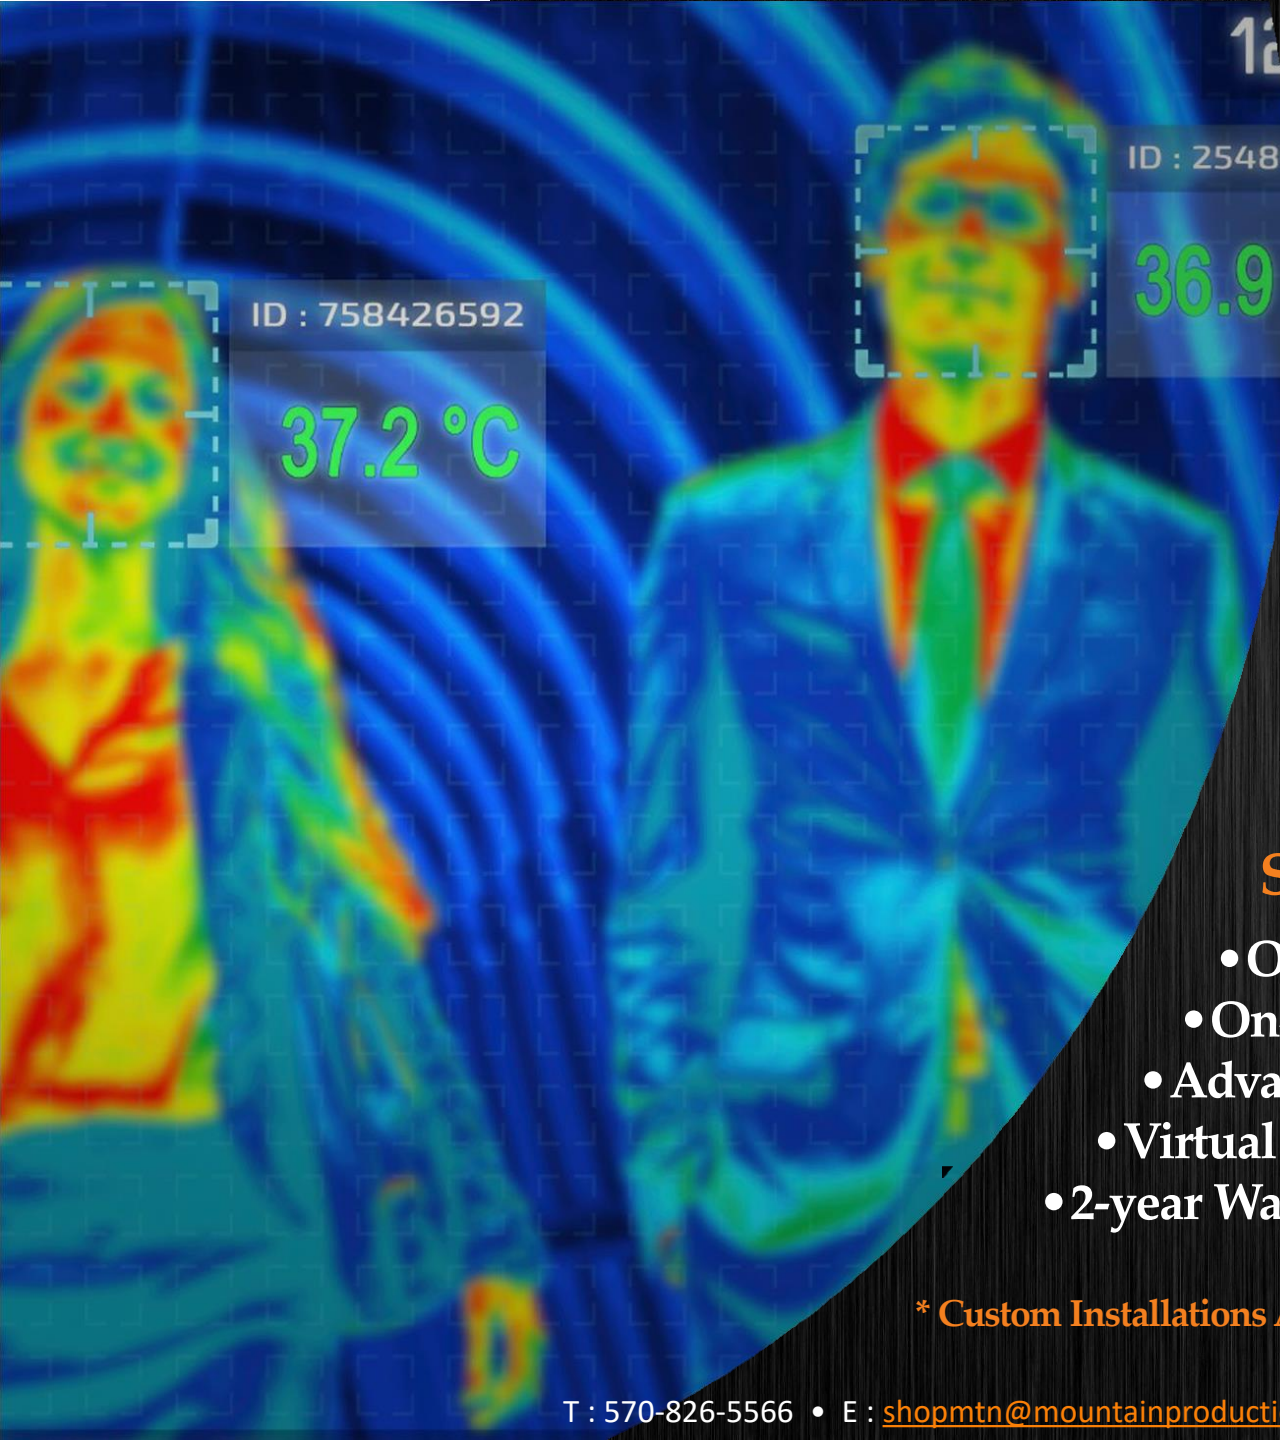

## BeMotion Inc. Solution Includes:

### Hardware:

- Thermal Imaging Scanner
- Laptop (**Optional**)
- Free Standing Tripod or Kiosk Stand
- Technical manual
- USB Drive (Software)
- Portable Protective Case

### Service Contract and Warranty:

- On-Site Set up
- On-Site Training
- Advanced Hardware Exchange Services
- Virtual IT Support
- 2-year Warranty

**\* Custom Installations Available Upon Request**



Distributed by :

**MTN SHOP**





# DUO32 Technical Parameters:

## THERMAL DETECTOR

Detector:	Uncooled
Resolution:	160*260
NETD:	<40mk
Spectrum Range:	8-14um
Pixel Size:	30um
Frequency:	30Hz

## LENS

Focal Length:	0.196 inches
FOV:	37.1° x 28.1°

## VISIBLE LIGHT

Resolution	1920*1080
: Min. Lux:	Color 0.001 Lux
F Value:	F 2.0

## PERFORMANCE

Measurement Range:	32F to 140F
Measurement Accuracy:	±0.8F
Measurement Distance:	3f
High Temperature Alarm:	Pop-up alarm, audio alarm
Preview Mode:	RGB/Thermal
Historical Data:	Yes
Facial Recognition:	Included
Capacity:	One person per scan
Power Supply:	USB x 2 (5V DC)
Face Detection Library:	<b>30,000 People</b>
Recognition efficiency:	> 0.03 sec

## ENVIRONMENTAL

Working Temp:	14F to 122F
Storage Temp:	-4F to 149F

Distributed by :

# MTN SHOP







# DUO400 Technical Components

## THERMAL DETECTOR

Detector:	Uncooled
Resolution:	400*300
NETD:	<40mk
Spectrum Range:	8-14um
Pixel Size:	17um
Frequency:	50Hz

## LENS

Focal Length:	0.385 inches
FOV:	37.1° x 28.1°

## VISIBLE LIGHT

Resolution	1920*1080
: Lens:	0.181mm
FOV:	90°

## PERFORMANCE

Measurement Range:	32F to 140F
Measurement Accuracy:	±0.8F
Measurement Distance:	3ft to 19.4ft
High Temperature Alarm:	Pop-up alarm, audio alarm
Preview Mode:	RGB/Thermal
Historical Data:	Yes
Facial Recognition:	(AI) Smart human face recognition & tracking system
Capacity:	> up to 400 people/minute
Power Supply:	USB x 2 (5V DC)
Date Output:	UVC (USB Video Class)
Control Connector:	USB

## ENVIRONMENTAL

Working Temp:	14F to 122F
Storage Temp:	-4F to 149F

Distributed by :

# MTN SHOP







# DUO650 Technical Parameters

## THERMAL DETECTOR

Detector	Uncooled
Resolution	640*512
NETD	<40mk
Spectrum Range	8-14um
Pixel Size	12um
Frequency	50Hz

## LENS

Focal Length	0.5 inches
FOV	48° x 38°

## VISIBLE LIGHT

Resolution	1920*1080
Lens:	0.236 inches
FOV	48° x 38°

## PERFORMANCE

Measurement Range	32°F to 140°F
Measurement Accuracy	±0.8° F (Without Blackbody)
Measurement Distance	3ft to 24.6ft
High Temperature Alarm	Pop-up alarm, audio alarm
Preview Mode	RGB/ Thermal
Historical Data	Yes
Facial Recognition	(AI) Smart human face recognition & tracking technology.
Capacity	>Up to 500+ people/minute
Power Supply	USB x 2 (5V DC)
Date Output	UVC (USB Video Class)
Control Connector	USB

## ENVIRONMENTAL

Working Temp	14F to 122F
Storage Temp	-4F to 149F

Distributed by :

# MTN SHOP







# DUO Technical Components:

COMPANY	COUNTRY	FUNCTIONS
Cypress Semiconductor:	US	Interface
Corporation Intel:	US	FPGA
Corporation Micron:	US	DDR
Technology,Inc. Winbond:	US	IC
Electronics Corp. Dialog:	Taiwan	IC
Semiconductor PLC Artosyn:	UK	ARM
Ray Technology Co:	China (Option A)	Detector
Ulis:	France (Option B)	Detector
BeMotion Inc.	Canada	Software

Distributed by :

**MTN SHOP**









# DUO400 - DUO650

## Recommended Position:

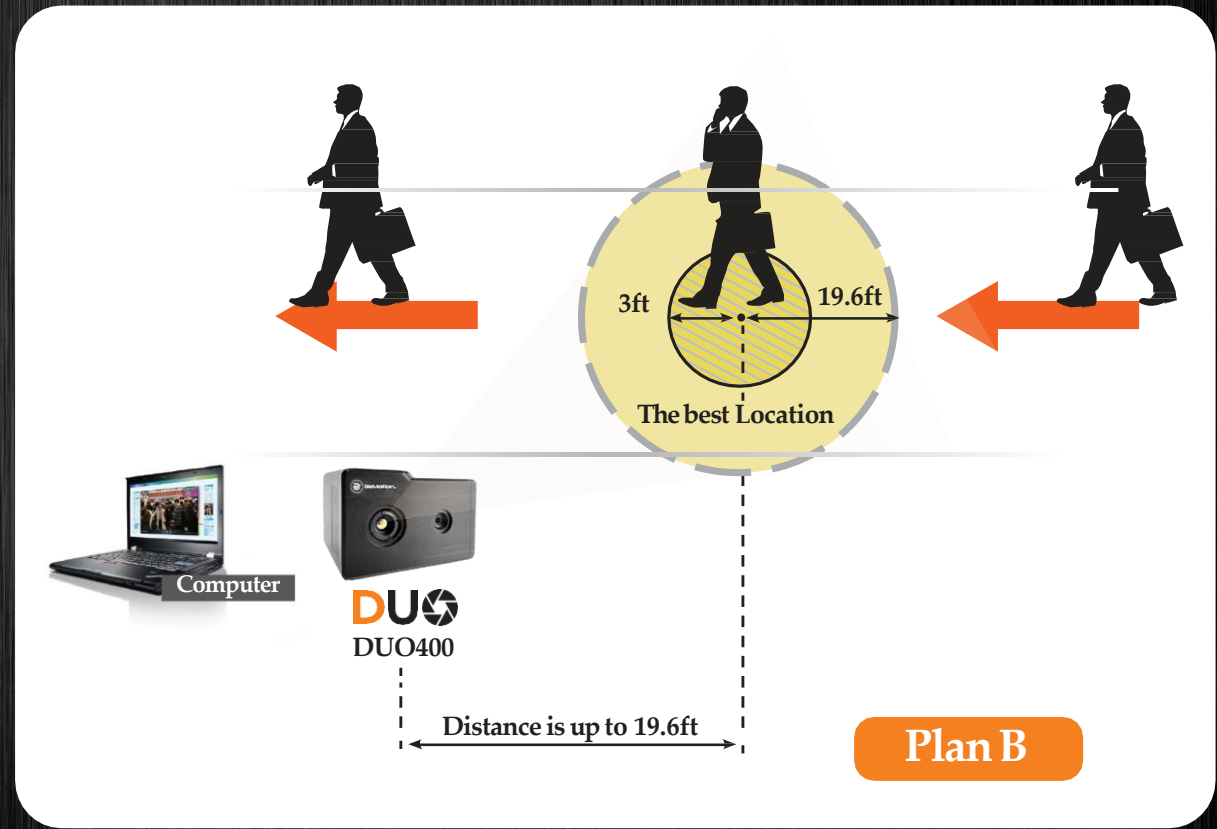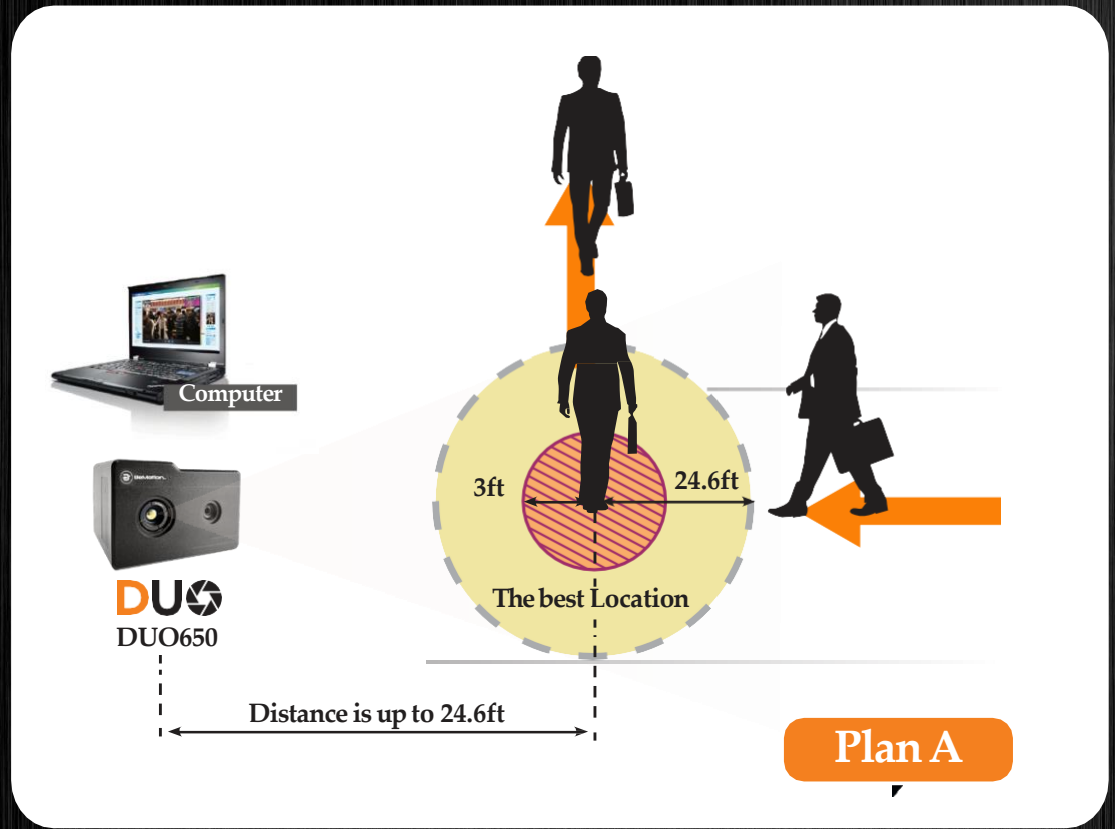

Distributed by :







**BeMotion** INC

For additional information please contact:  
[info@bemotioninc.com](mailto:info@bemotioninc.com), [www.bemotioninc.com](http://www.bemotioninc.com)

Distributed by :

**MTN SHOP**

