

DUAL-RING CABLE TIE-OFF ADAPTER

**COMPATIBLE.  
SECURE.  
SAFE.**

**REPLACE  
YOUR MATERIAL  
HANDLING  
SLINGS WITH  
A FALL ARREST  
RATED ANCHOR.**



TRUSTED, QUALITY FALL PROTECTION

PRODUCT SHEET

# DUAL-RING DESIGN

## EASILY SLIDE OR REPOSITION WITHOUT DISCONNECTING

### Performance, Value and Safety


The Protecta® dual-ring cable tie-off adapter is a lightweight and extremely durable anchor designed to provide an alternative to "choker" style anchors, and is a safe replacement for material handling slings being used for fall protection.

- Reposition without disconnecting or loosening—simply slide
- Portable and reusable design provides added versatility
- Durable ¼" (6.35 mm) galvanized construction for longevity
- Meets the latest OSHA and ANSI standards

The dual-ring design provides a safe, compatible connection that is fall arrest rated for personnel, replacing incompatible "basket" type configurations such as used with some slings, or slings requiring multiple hooks into a single connecting element or connecting combinations of hooks or carabiners together.


#### NOT RECOMMENDED:

Attaching more than one hook into a single connecting element (ref: OSHA & ANSI)

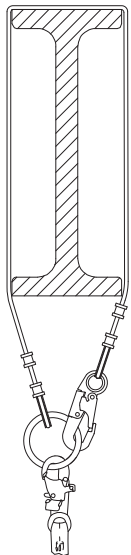

#### NOT RECOMMENDED:

Connecting combinations of hooks or carabiners together (ref: OSHA & ANSI)

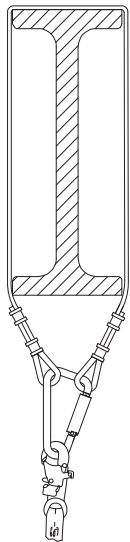

**RECOMMENDED:** Protecta® offers a wide variety of safe, secure and compatible anchors including the dual-ring tie-off adapter and various cable and web choker/pass-thru tie-off adapters.



#### Easily Repositioned

Slide anchor—no need to disconnect or loosen

#### Fall Arrest Rated

For personnel use and peace-of-mind—5,000 lb. (22kN)

#### Extremely Durable

Galvanized steel construction

#### Built-In Saflok™ Carabiner

Self-closing, self-locking one-handed operation

2190100

#### Dual-Ring Design

Provides safe and compatible tie-off point

#### Models Available:

2190100—Dual-ring cable tie-off adapter x 3 ft.

2190101—Dual-ring cable tie-off adapter x 4 ft.

2190102—Dual-ring cable tie-off adapter x 6 ft.

*NOTE: In Canada, add a "C" to the end of the part number.*

#### Specifications:

**Hardware:** Zinc-plated forged alloy steel D-rings and carabiner

**Wire Rope:** ¼" diameter 7x19 galvanized wire rope

**Minimum Breaking Strength:** 5,000 lbs (22 kN)

**Capacity:** 310 lbs. (141 kg) (one person)

**Standards:** Meets ANSI Z359.1 and OSHA requirements

**Weight:** 1.6 lbs. (0.73 kg) for 3 ft. model



Capital Safety - USA: 800 328 6146

Canada: 800 387 7484 | Latin America: +1 651 385 4301

Asia: +65 65587758 | Germany: +49 (0)30 92 03 83 87 00

New Zealand: 0800 212 505 | Australia: 1800 245 002

Europe, Middle East, Africa: +33 (0)4 97 10 00 10

Northern Europe: +44(0)1527 548000

[www.capitalsafety.com](http://www.capitalsafety.com) | [info@capitalsafety.com](mailto:info@capitalsafety.com)