
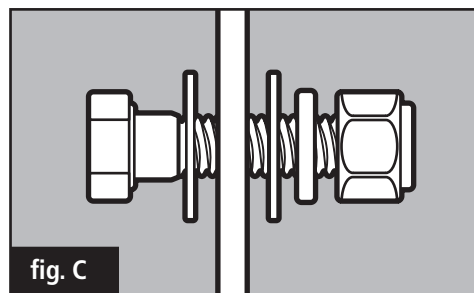
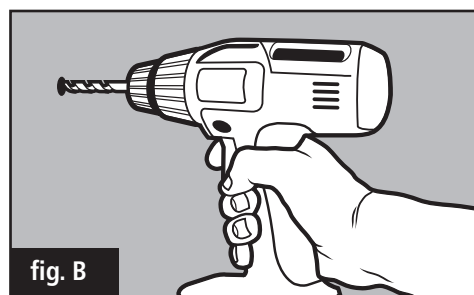


Mounting Bracket for PIG Spill Kit in Bucket

Instructions

Installation

1. Choose desired location for spill kit. Place bracket against the mounting surface, using a level to keep it straight.
2. Holding the bracket in place, mark the two predrilled holes. (fig. A)
3. Remove the bracket and using the marks as guides, drill the mounting holes. Mounting holes should be sized to accept a 1/2" diameter bolt. (Drill bit size may vary depending on mounting surface, desired depth, and width of screws or anchors.) (fig. B)
4. Mount bracket, using appropriate 1/2" hardware. A minimum of two bolts, four flat washers and two lock washers and two nylon nuts should be used. (Hardware not included.) (fig. C)
5. When bracket is secured, drop spill kit bucket into place through the top opening of the bracket. Secure by placing strap over the top of the bucket. (fig. D)

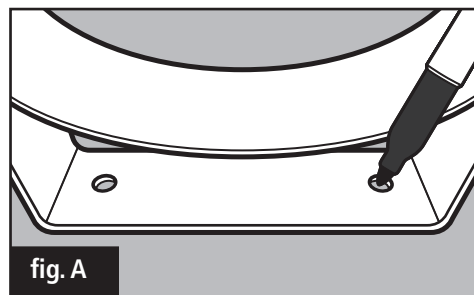

New Pig

One Pork Avenue
Tipton, PA 16684-0304

newpig.com

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**

501853 / 310685