

giftedbaby

Instruction Manual

Item No.: HC02S

Suit for Child Height 76-150cm



Dear parents

Thank you very much for purchasing our product.

The nice function and credible design with accord to somatology would afford the most safety and comfort when your child was in this child restraint.

In order to exert the excellent function, please adjust the child restraint till that is suitable for your child's stature and avoirdupois before using our product and then equip it carefully and steadily.

Research shows that a high number of car safety seats are incorrectly installed. Therefore, please take the time to read through the instruction manual carefully.

Our product offers maximum safety only when it is used in accordance with the instructions.

Continuous research by our development team, user tests and consumer reactions ensure that we are kept fully up to date in the field of child safety.

Therefore, if you have any questions concerning the use of the our product, please do not hesitate to contact us.

You can see our contact information in the service card.

Contents

1. Notice.....	1
2. Important.....	2
3. Product Overview.....	4
4. How to use the child seat.....	6
5. Installation in the vehicle.....	13
6. Installation for child height 76-105cm.....	14
7. Installation for child height 100-150cm.....	17
8. Cleaning.....	19
9. Checklist.....	19
10. Warranty.....	20

1.Notice!!!

This product will reduce the harm of traffic accidents to children, but cannot guarantee the absolute safety of children, so when you driving, please strictly abide the local traffic laws and regulations.

Notice for Child Size Range 76-105cm

- Notice! This is an "i-size" Enhanced Child Restraint System . It is approved to UN Regulation No 129 for use in "i-Size" compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle users' manual.
- If in doubt, consult either the child restraint manufacturer or the retailer.
- IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 MONTHS (Refer to instruction).

Notice for Child Size Range 100-150cm

- Notice! This is an "i-Size booster seat" Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use primarily in "i-Size seating positions" as indicated by vehicle manufacturers in the vehicle user's manual.
- If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.
- Only suitable if the approved vehicles are fitted with lap/3 point/ ~~static~~ with retractor safety-belts, approved to UN/ECE Regulation No.16 or other equivalent standards.

The size range for which this device is intended is as below table:

Seat orientation	Size range	ECRS Installation	Category	Class
Forward	76-105cm ≤ 18kg	ISOFIX with Top tether	i-Size	Integral
Forward	100-150cm	ISOFIX with 3-point Adult safety belt or 3-point Adult safety belt only	i-Size Booster Seat	Non- Integral

2.Important

WARNING

- Read this instruction manual carefully.
 - The correct fitting of the ISOFIX anchoring systems or 3-point belt is of vital importance for the safety of your child.
For the future use of the seat, it is important that you keep the instruction manual carefully. There is a pocket on the side of the base where the instruction can be retained with the child restraint.
 - Never leave your child unattended in the car.
 - Do not use a child safety seat if the vehicle seat is equipped with a front airbags. This can be dangerous. This does not apply to so-called side airbags.
-
- Before use our product, please read the instruction manual carefully, the product is a safety product and is only safe when used in accordance with the instruction manual.
 - The product must only be used on a forward facing seat that is fitted with the ISOFIX and Top Tether anchoring systems or 3-point belt which is approved according to ECE R16 or an equivalent standard.
 - The product may be used on either the front or the back seat. However, we recommend that it is fitted on the back seat.
 - The product has been approved to ECE R129/04, it is suitable for 76-105cm with the ISOFIX and Top tether systems, 100-150cm with ISOFIX+3-point car belt.
 - After an accident the seat may become unsafe due to damage that is not be noticeable immediately. It should therefore be replaced.
 - The safety of the seat can only be guaranteed by the manufacturer if it issued by the original owner.
 - We advise you strongly that not to use a second-hand product, because you are not sure what has happened to it. The harness pads are important for the safety of your child, therefore use them at all the time.
 - Ensure that all luggage and objects likely to cause injury in the event of an accident are properly secured.
 - It is recommended that the car seat should not be used more than 5 years from the date of production. The properties of the products may deteriorate due to, for example, ageing of the plastic and this may not be visible.
 - The moving parts of the car seat should not be lubricated in any way.
 - The baby car seat must not be used without the cover. Please use an original cover, as the cover contributes to the safety of the seat.
 - The seat must be secured with a seat belt or ISOFIX and Top tether, even when it not on use. An unsecured seat may injure other passengers in the

car in an urgent stop.


- The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
- Ensure that the seat is not damaged by the webbing between or underneath heavy luggage, adjustable seats or slamming the car door etc.
- No alterations may be made to the product as this could affect part or the overall safety of the seat.
- In hot weather the plastic and metal parts of the product will be hot. You should cover the seat when the car parked under the sun.
- In order to prevent damage to the cover, do not remove the product's logo.
- Use the seat even in a short journey, as this is when most accidents occur.
- Before the purchase, please check that the seat is properly in your car .
- Take a short break in long journey. So that your child has some time for the relaxation.
- Set a good example yourself and always wear your seat belt.
- Tell your child that he/she should be never play with the harness buckle.

Questions!!!


Contact your supplier or importer if you wish to make a warranty claim or have any other questions.

Your car seat can be fixed safely on almost seats of the cars. However, on some seats the belts are fixed so that proper installation is not possible, in that case, try another seat.

3. Product Overview

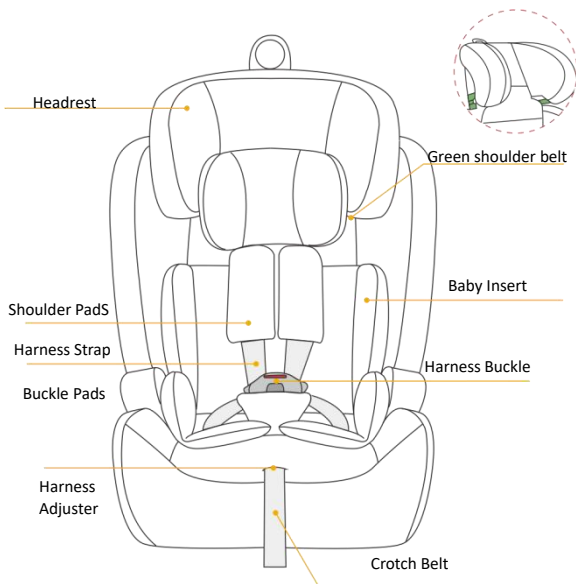

3. Product Overview

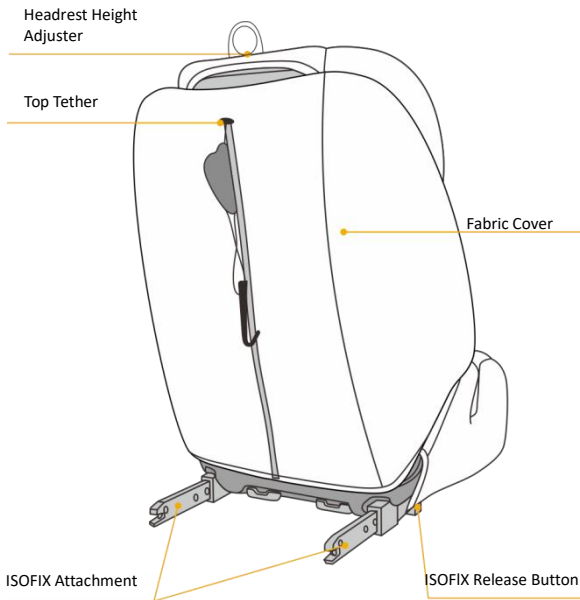

4.How to use the child seat

4.1 use in the vehicle

WARNING



DO NOT use with 2-point belt.
Please install with the 3-point







Please observe the regulations applicable to your particular country.
The safety belt must be approved to ECE R 16 or a comparable standard.
Do not use with 2-point belt.
Can be used if the vehicle seat is equipped with a 3-point belt.

You can use your child car seat as follows:



4. How to use the child seat

● In the direction of travel	Yes
● Against the direction of travel	No
● With 2-point belt	 No
● The use of a 2-point belt substantially increases the risk of injury to your child in the event of an accident.	
● With 3-point belt	 Yes
● The safety belt must be approved to ECE R 16 or a comparable standard (see test label on belt with an "E" or "e" in a circle).	
● with the ISOFIX and Top Tether anchoring systems	Yes
● If there is a front airbag: Slide the passenger seat a long way back and refer to any instructions in vehicle owner's manual.	
● On front passenger seat	 Yes
● Do not use on passenger seats with a front airbag! The front passenger seat may be used with or without ISOFIX, with the same notes as currently given for the ISOFIX (slide the seat back and refer to vehicle instructions)	
● On outer rear seat	Yes
● On centre rear seat	Yes
● Can be used if the vehicle seat is equipped with a 3-point belt.	 Yes

(Please observe the regulations applicable to your particular country).

4. How to use the child seat

4.2 Securing your baby by using the baby insert



For the protection of your baby

CAUTION

Please use the baby insert attached to this car seat when your baby's height is less than 87cm.

The baby insert is used to provide extra comfort for very small babies, and it gives your baby the necessary support while he or she is still small.

Baby Insert



- Always secure your baby in the car seat using the harness.
- Never leave your baby unattended in the car seat when placing it on elevated surfaces (e.g. a table, nappy changing unit, etc.).
- Never allow the strap end to become caught in moving parts (e.g. automatic doors, escalators, etc.).
- **Caution!** The plastic parts of the car seat heat up in the sun, so that your baby may get burnt. Protect your baby and the car seat against intensive solar radiation (e.g. by putting a light cloth over the seat).
- Take your baby out of the car seat as often as possible to relieve its spine. We recommend frequent breaks during long journeys. Even outside of the car, please avoid leaving your baby in the car seat for too long.

4. How to use the child seat

4.3 Adjusting the harness belts


Loosen the harness straps by pressing the release button and pulling the harness straps as far as you can.

Note! Do not pull the shoulder pads.



4.4 Adjusting the headrest and shoulder belt height

The headrest has 11-position adjustment, suit for 100-150cm child height. Pull upwards on the headrest height adjuster, whilst pulling up or pushing down the headrest to the required position.



The shoulder belt height can be adjusted together with the headrest.

NOTE: The shoulder belts must not run behind the back of the child or at ear height or above the ears.



IMPORTANT


The correct harness belt height is attained when the belt disappears into the shell slightly above the shoulder of the child.

Make sure that the shoulder belts fit properly over the shoulders of the child.


4. How to use the child seat

4.5 The use of safety buckle

To unfasten the seat belt, press the red button and the insert will automatically pop out.



Close the left and right inserts of the buckle together. Insert the closed plug into the slot of the buckle at the same time. If you hear a "click" sound, it means the buckle is securely fastened. Do not press the red button, pull the insert upwards and check if the buckle is properly locked.





4.6 Securing the child by using the harness

4.6.1 Loosen the harness straps by pressing the release button and pulling the harness straps as far as you can.

Note! Do not pull the shoulder pads.



4.6.2 Open the harness buckle, then place the harness straps to the sides of the car seat. Put the baby into the car seat.




4.How to use the child seat


4.6.3 The correct belt height of the shoulder pads is attained when the strap disappears into the shell slightly above the shoulder of the child. Make sure that the harness straps fit properly over the shoulders of the child.



4.6.4 Slide buckle tongues together and insert them in the buckle with an audible sound "click".




4.6.5 Pull the straps tight by the harness adjustment strap, and make sure the tightness is comfortable to your kid.



CAUTION

Do not twist or interchange the harness straps.

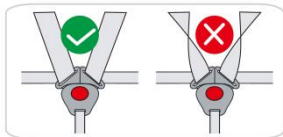


4.How to use the child seat

4.7 Tightening the harness

CAUTION

Pull the straps end straight towards you, not upwards or downwards.

Please pay attention to the strap end. Whilst traveling (especially outside the car) it should always be attached to the cover.




4.8 Checklist to ensure that your baby is buckle up correctly

IMPORTANT



For the safety of your baby please check that...

- The harness straps of the car seat are comfortable but firmly fit around your child.
- The harness straps are adjusted correctly.
- The harness straps are not twisted.
- The buckle tongues are engaged in the harness buckle.



5.Installation in the vehicle



Please do not leave your child unattended in the child safety seat in the vehicle.



For the protection of all vehicle occupants

In the case of an emergency stop or an accident unsecured persons or objects may cause injury to other vehicle occupants. Please always check that...

- The backrests of the vehicle seats are locked (i.e.that a foldable rear seat bench latch is engaged).
- All heavy or sharp-edged objects in the vehicle(e.g. on the parcel shelf) are secured.
- All persons in the vehicle have their seat belts fastened.
- The child safety seat is always secured when it is in the vehicle, even if no child is being transported.

To protect your vehicle

Some vehicle seat covers of sensitive materials(e.g. velour, leather, etc.) may develop wear marks when child seats are used. This can be avoided by placing a blanket or towel under the child seat.

6. Installation for child height 76-105cm

Installation in forward facing with ISOFIX and Top tether, for child height $76-105\text{cm} \leq 18\text{kgs}$


6.1 Installation the isofix

IMPORTANT



First please check if there are 2 ISOFIX anchorage in the perpendicular intersection of the vehicle seat back and seat cushion, and the user-ready tether anchorage behind the vehicle seat.

Tips: The user-ready tether anchorage usually permanently installed on the inner rear luggage shelf or on the vehicle floor. Details you could read your vehicle guidelines or contact the vehicle manufacturer.


- Press the ISOFIX release button and push the ISOFIX connectors forward as far as possible.



- Push the ISOFIX connectors directly into the anchorages until heard an audible sound "click".




- Grasp the seat body to check the seat if it is fastened tightly or shakes. If the seat shakes and the ISOFIX connectors are pulled out, please repeat the above steps and install it again.




6. Installation for child height 76-105cm

6.2 Installation the top tether


- Pull out the top tether and press the tether strap release button to extend the strap until it is long enough to hook the user-ready tether anchorage behind.

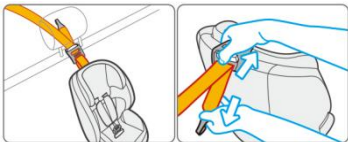

- Hook the tether strap hook onto the user-ready anchorage. Check there maybe are 3 anchorages for the hook, please find one in your favor.

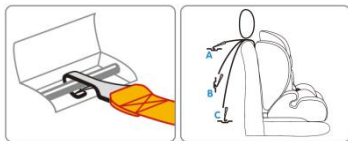


- Pull the tether strap on another end back to tighten the top tether.



CAUTION


If the top tether is tightened favorably and correctly, a green mark will turn up on the other end of the strap release button, please do check it.




6. Installation for child height 76-105cm

6.3 Remove from Top Tether

- Pull out the top tether and press the tether strap release button to extend the strap.



- Remove the tether strap hook from the user-ready anchorages.



6.4 Remove from ISOFIX

- Press the ISOFIX unlock button on the green indicator and simultaneously press the button to remove it from the ISOFIX anchor points.

- Do this for both sides.
- If the ISOFIX mount does not unlock, push the car seat a little further to the back of the bench to more easily disengage the mountings.




7. Installation for child height 100-150cm



Installation in forward facing with ISOFIX and 3-point adult safety belt or 3-point adult safety belt only, for child height 100-150cm

7.1 Remove the 5-point harness system before installation




- Release the zipper on the back of the child seat



- Press the seat belt adjustment button with your forefinger, and pull the shoulder strap outward with the other hand as far as you can. Then remove the belt from the connector on the back of the child seat, then remove the shoulder belt from the fabric cover slot on the front of the child seat, then you can release the shoulder strap.



- Remove the shoulder strap from the buckle, then remove the metal piece connected to the safety buckle and two shoulder straps from the slot on the bottom of the child seat.



CAUTION:


The Baby insert, Harness strap, Harness buckle, Buckle pads& Shoulder pads should be stored away safely for future use.

Steps of installation and removal are completely opposite.


7. Installation for child height 100-150cm

7.2 Install the child seat

- Fix the child seat to the car seat with isofix (see chapter 6.1)
- ISOFIX connector is optional, you can ignore this step if you do not want to use it.



- Place your child on the child seat.
- Adjust the height of the headrest to suit your child. (see chapter 4.4)



- Put the diagonal belt through the shoulder, pass the lap belt through and under the child armrest. Fasten the car belt with an audible sound "click".



- Make sure that the diagonal belt must go through the head belt hook guide as photo shown and the lap belt is stretched as low as possible over the child's hips, and fastened into the buckle. The shoulder belt must cross midway between child's shoulder and neck.



WARNING

Do not to use any load bearing contact points other than those described in the instructions and marked in the child restraint.

The belt must be routed as shown in the instructions.

8. Cleaning

Please be sure to use only original seat covers, as the seat cover is important to the proper functioning of the system. Replacement seat covers are available from your retailer and or at branches.



The child seat must not be used without the seat cover.

- The cover can be removed and washed with a mild detergent using the washing machine's cycle for delicate items (30°C). Please observe the instructions on the washing label of the cover. The colours of the cover may fade if washed at more than 30°C. Do not spin, and never tumble dry in an electric clothes dryer (the fabric may separate from the padding).
- The plastic parts can be cleaned using soapy water. Do not use harsh cleaning agents (such as solvents).
- The harness can be removed and washed in lukewarm soapy water.

Caution! Never remove the buckle tongues from the straps.

9. Checklist

For safety's sake read through this checklist before you set off.

Check that the harness belt system fits properly and tightly around your child and that the shoulder belts are at the correct height.

Check regularly that the belt in the baby car seat is not damaged. If it is damaged do not use your product in any circumstances and contact your supplier or importer (see address list in the service card).

Check that you have secured your baby car seat with the seat belt. If you have any questions, please contact your supplier.

Make sure that you have the following details to hand:

- Serial number underneath on the service card.
- Mark and type of vehicle and seat on which the baby car seat used.
- Height and weight of your child.

10. Warranty

Legal Warranty and Customer Service

This product is covered by a **24-month legal warranty** in accordance with Italian Legislative Decree 206/2005 (Consumer Code) and applicable European regulations. The warranty only covers conformity defects existing at the time of delivery of the product.

The consumer is entitled, free of charge, to the repair or replacement of the defective product. If these remedies are not possible or are excessively burdensome, the consumer may request a price reduction or termination of the contract.

The warranty is valid only upon presentation of proof of purchase (receipt, invoice, or order confirmation) issued by ONEBUY S.R.L. or an authorized reseller.

The warranty does not apply to products without the importer's identification label or that have been tampered with.

Shipping and handling costs related to the warranty are borne by ONEBUY S.R.L., except in cases of misuse, tampering, or expiration of the warranty. In such cases, the product will be returned to the customer at their own expense.

For assistance or claims, please contact:

ONEBUY S.R.L.

Via Formale 12

63078 Spinetoli (AP) – Italy

VAT: IT0257018044

Email: support@onebuy.eu

**Importer and Distributor in the
European Union**

ONEBUY S.R.L.

Via Formale 12 – 63078 Spinetoli (AP) – Italy

VAT: IT02570180444

Manufacturer

Anhui Good Hope Baby Safety Technology Co., Ltd

Manufacturer's Address

Eighth Workshop, Chuangxinchuangye Workshop,
Zhangqiao Road, Economical and Technological
Development, Fuyang City, Anhui Province, China