

MT402 Weighbridge Assembly

Features


- Double Ended Shear beam
- Fully welded
- Tool Steel Construction
- Water Proof
- Electroless Nickel Plated
- High Accuracy
- Easy to Install
- IP68 Protection



Specifications

Capacity	t	10,20,30,40t
Combined Error	(%FS)	$\leq \pm 0.020$
Creep (30 minutes)	%FS/30min	$\leq \pm 0.017$
Temperature effect on sensitivity	(%FS/10C)	$\leq \pm 0.014$
Temperature effect on zero	(%FS/10C)	$\leq \pm 0.017$
Output sensitivity	(mv/v)	2.0 ± 0.005
Input resistance	(Ω)	730+/-30
Output resistance	(Ω)	700 +/-10
Insulation resistance	(M Ω)	≥ 5000 (50VDC)
Zero balance	(%FS)	2.0
Temperature, Compensated	($^{\circ}$ C)	-10 ~ +40
Temperature, Operating	($^{\circ}$ C)	-35 ~ +65
Excitation, Recommended	(V)	5 ~ 12(DC)
Excitation, Max	(V)	18(DC)
Safe overload	(%FS)	120
Ultimate overload	(%FS)	200

MT402 Weighbridge Assembly

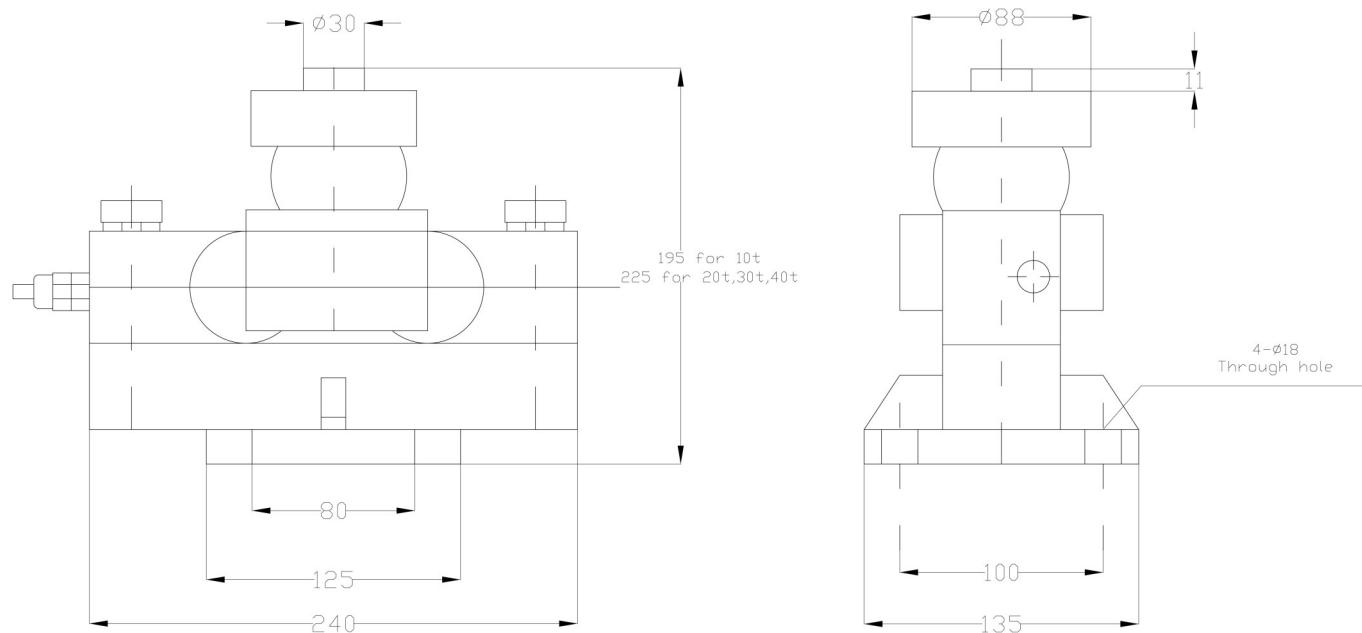

Dimensions (mm)

MT402 Weighbridge Assembly consists of load cell , steel ball , ball seating and base plate as per diagram shown above.

Cable

4 Core, 5.6 mm dia

Cable Length: 16m

Color Code

Exc+ Red, Exc- Black

Sig+ Green, Sig- White

Screen- Transparent

Specifications are subject to change without notice for improvement

MT402T REV01-29012012



Millennium Mechatronics Limited
Email: info@meltrons.com | www.meltrons.com

