## **LED Flood Light Instruction**

#### **Cautions:**

- 1. Do not use the electric generator to test the LED lamp.
- 2. Please abide by related country, regional and local law and regulations when install this fixture.
- 3. Please turn off the power before installation or maintenance.
- 4. Proper grounding is required to ensure safety.

#### Notice:

- 1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
- 2. Please wear gloves to avoid injury before installation.
- 3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.


#### **Attention:**

- 1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
- 2. Please read the installation instruction carefully to check whether all the accessories are available. After confirmation, install the fixture according to installation steps.

#### Instruction:

The installation of this led light with different wattage is different. Please refer to the installation instruction correspondingly.

### Wiring Diagram:

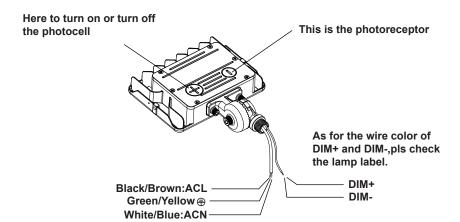

#### Installation 1: Installation with adjustable fitter mount


### 1.1 Adjustable fitter mounting (b=AM suitable for all power of this series)

- Step 1: Take the lamp out of package;
- Step 2: pass the wires through hardware and fix it with screws; (figure 1.1)
- Step 3: Pass the wires through from the other bracket and rubber, fix it with screws.(Watch out not to scratch the wire); (figure 1.2)










## 1.2 Installation of led lamp with adjustable fitter (b=AM suitable for all power of this series)

- Step 1: Take the lamp out of package:
- Step 2: Connect the wires properly according to the right wiring requirements (pay attention to positive wire, negative wire, and ground wire), and then put the wires into lamp pole; (figure
- Step 3: Loosen the screws, adjust the lamp angles as per actual demands and then tighten the screws; (figure 1.5)

Tips: Angles of the lamp is adjustable


(pass the bracket through mounting surface, fix it with screws, then connect the wires as per proper wiring requirements.)

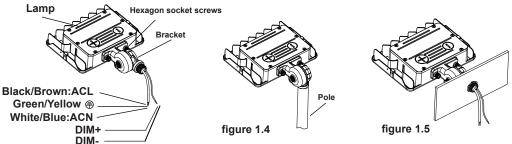

## **Installation 2: Installation with Yoke Mount**

## 2.1 Yoke Mount installation(b=YM suitable for all power of this series)

- Step 1: Take the lamp out of package;
- Step 2: Pass the wires through hole of bracket; (figure 2.1)
- Step 3: Fix the lamp and bracket together with screws; (Watch out not to scratch the wire) (figure 2.2)
- Step 4: Tighten the other bracket with screws (figure 2.3)







figure 2.1 figure 2.2 figure 2.3

## **2.2** Installation of led lamp with Yoke Mount(b=YM suitable for all power of this series)

Step 1: Take the lamp out of package;

Step 2: Connect the wires properly according to the right wiring requirements (pay attention to positive wire, negative wire, and ground wire), and then put the wires into lamp pole; (figure 2.4)

Step 3: Loosen the screws, adjust the lamp angles as per actual demands and then tighten the screws; (figure 2.5)

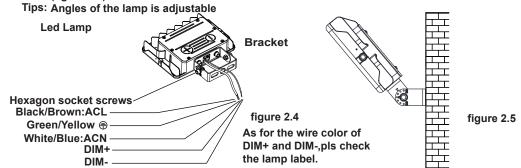

#### **Installation 3: Installation with Flood Mount**

## 3.1 Flood Mount Installation (b=FM suitable for all power of this series)

Step 1: Take the lamp out of package; (figure 3.1) Step 2:Tighten the brackets and screws. (figure 3.2)






figure 3.1


figure 3.2

# 3.2 Installation of led lamp with flood mount(b=FM suitable for all power of this series)


Step 1: Take the lamp out of package;

Step 2: Connect the wires properly according to the right wiring requirements (pay attention to positive wire, negative wire, and ground wire), and then put the wires into lamp pole;(figure 3.3)

Step 3: Loosen the screws, adjust the lamp angles as per actual demands and then tighten the screws; (figure 3.4)

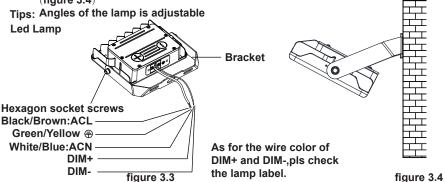





Warning/Avertissement

MIN 75 °C SUPPLY CONDUCTORS.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

LES FILS D'ALIMENTATION 75 °C MIN. CCE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS