



SWP5 Traditional LED Wall Pack Light

OPTICAL

- Wattage: 40W, 60W, 80W, 120W
Lumen efficacy: 130-135LM/W
- CCT: 4000K & 5000K
- CRI: 80+
- Beam Angle: 105°
- Diffuser Type: Glass
- Photocell on by default



ELECTRICAL

- Input Voltage: AC120-277V 50/60Hz
- Driver Surge protection: L-N: 6KV , L&N-E:6KV
- 0-10V Dim to off
- Powerfactor: ≥0.9
- THD: ≤20%
- Operating Temperature: -40°F to 122°F(-40 °C to 50 °C)
- -13°F to 122°F (-25 °C TO 50 °C) with motion sensor
- 32°F to 122°F (0 °C TO 50 °C) with emergency driver



MATERIALS

- LED Brand/Type: LUMILEDS SMD2835
- Housing:Die-cast aluminum
- Waterproof Rating: WET (IP65)
- Housing Color: Brown,White



CERTIFICATIONS

- UL/ DLC-5.1 Premium/FCC/ROHS certificate

OPTIONAL ACCESSORIES

- Emergency driver, Motion sensor, Wire guard, Housing shield

APPLICATION

- Entrance lighting,courtyard lighting;Industrial lighting,Outdoor landscape lighting;Building,The hotel;Wall lighting area and so on.




SWP5 Traditional LED Wall Pack Light

ORDERING GUIDELINES

MPN	Models	Descriptions	QTY/Master box
107-100116	GT-SWP5-40W-LBCG-BR40K-S	40W,AC120-277V, 4000K,Brown, Glass,Photocell on	1 PC
107-100117	GT-SWP5-40W-LBCG-BR50K-S	40W,AC120-277V, 5000K,Brown, Glass,Photocell on	1 PC
107-100118	GT-SWP5-60W-LBCG-BR40K-S	60W,AC120-277V, 4000K,Brown, Glass,Photocell on	1 PC
107-100119	GT-SWP5-60W-LBCG-BR50K-S	60W,AC120-277V, 5000K,Brown, Glass,Photocell on	1 PC
107-100120	GT-SWP5-80W-LBCG-BR40K-S	80W,AC120-277V, 4000K,Brown, Glass,Photocell on	1 PC
107-100121	GT-SWP5-80W-LBCG-BR50K-S	80W,AC120-277V, 5000K,Brown, Glass,Photocell on	1 PC
107-100122	GT-SWP5-120W-LBCG-BR40K-S	120W,AC120-277V, 4000K,Brown, Glass,Photocell on	1 PC
107-100123	GT-SWP5-120W-LBCG-BR50K-S	120W,AC120-277V, 5000K,Brown, Glass,Photocell on	1 PC

DIMENSIONS

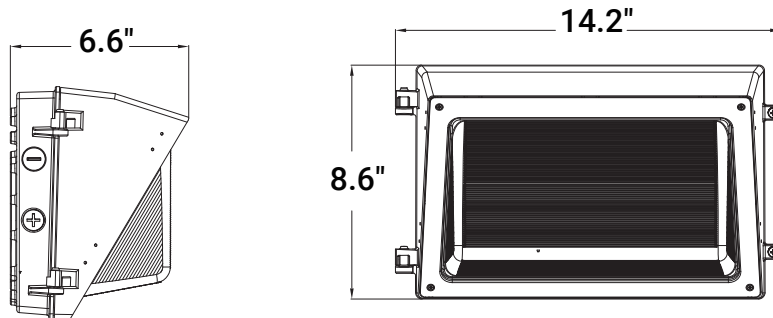

40W & 60W & 80W & 120W