

GT-CAB7 Cabinet Light

PART NO: GT-CAB7

### **FEATURES**


- Seamless joint strip
- High lighting effect, 4014 high brightness LEDs
  Small size, 5m can be connected in maximum
- Magnetic or mount holder, convenient to install
- No light spot design
- 3 yr warranty

### **APPLICATION**

- Cabinets
- Exhibition Frames
- Storage Shelf
- Wardrobe Shelf
- Bookcase





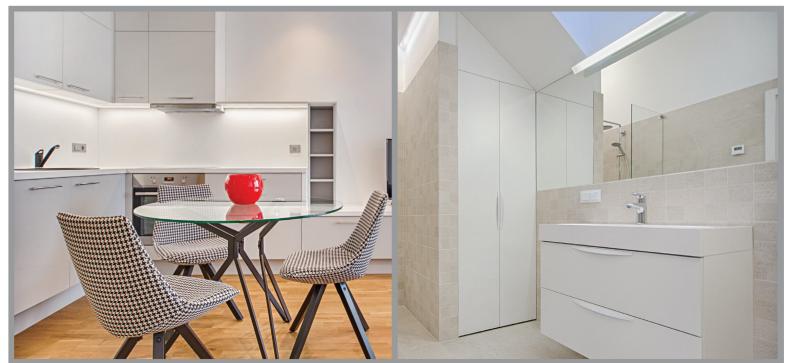






GT-CAB7 Cabinet Light

### **DIMENSIONS**



### **TECHNICAL PARAMETERS**

MODEL	COLOR	LUMEN	LED TYPE	LED QTY	LENGTH	DC VOLTAGE	RATED WATT	RATED CURRENT	BEAM ANGLE
	White	920	4014 84						
	Nuetral White			512	12	7.56	0.63	120°	
	Warm White	820							

### **TECHNICAL PARAMETERS**

NAME	MOUNT HOLDER	SCREW	END CAP	CONNECTION WIRE	MIDDLE CONNECTION WIRE (OPTIONAL)
DRAWING					
QTY	2pcs	2pcs	1pcs	1pcs	





## **GT-CAB7** Cabinet Light


Left Adapter	Optional	Right Adapter	AD B	Optional
left T Adapter	Optional	Right T Adapter		Optional
end T Adapter	Optional	Cross Connector		Optional

### **INSTALLATION DIAGRAM**


### I. Holder Installation

step 1: Pull a parallel string where the LED strip will be installed;

step 2: Fix mounting clamps on the base line, and the distance depend on practical situation;

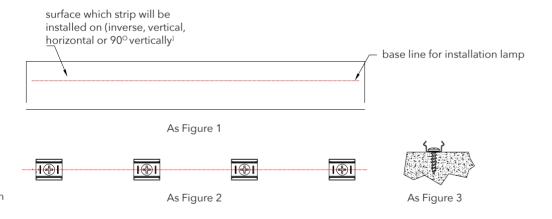

## **GT-CAB7** Cabinet Light




### II. Magnet Adsorption Installation

There is magnet in the LED strip bottom; can be directly adsorbed on the surface of iron products, quick to install.




First confirm the installation position of LED strip, after one has been installeed, joint another. Connecting before installation is not permitted. 5m can be connected in maximum.


## Strip Connection Step



1. Snap the front plug into wire socket from top-down, when connecting another strip, the end cap needs to be removed first;




2. Snap the front plug of the second strip into the first strip, then connected in turn;



3. When connecting to the last strip, cover the components of end cap and connect;




**GT-CAB7** Cabinet Light

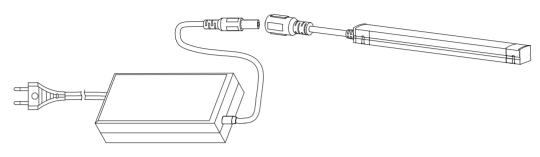

4. Finally connect to power supply, installation finish.

### **PACKING INSTRUCTIONS**

Put the LED strip into electrostatic bag, then put the electrostatic gab into the carton.

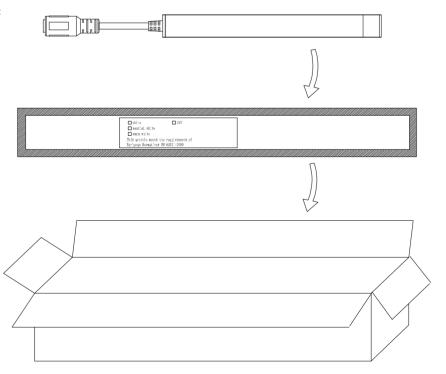



### **GT-CAB7** Cabinet Light

#### **INSTALLATION REQUIREMENTS**

- Please read the product specifications carefully, make sure operating environment conform to conditions in specifications in order to be used.
- 2. Correct electrical polarities need to be observed. Wrong polarity may damage the strip.
- 3. Confirm input voltage before using and power off.
- 4. Pay attention to the standard ESD precautions when installing the strip.
- 5. The length of serial connection can not exceed 5m, LED strip can not exceed 10 pieces.

#### **WARRANTY**

This product has a warranty for a period of 3 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. Greentek Energy Systems does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. Greentek Energy Systems reserves the right to alter specifications without prior notice.

