

LED PANEL BACK LIT PANEL-40W



DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG#:		

ADVANTAGE

- No LGP, therefore there is NO yellowing risk
- Elegantly designed to withstand bending. Light weight for easy installation.
- Slim design at 1.38" thick
- Unique design separating high-volt wire and low-volt wires, for a safer installation
- Unique integrated driver + junction box design (If a larger junction box, emergency ballast, or motion sensor is needed, this can be special ordered

WEIGHT


WT OF PRODUCT (LBS): 4.85lbs

WT OF SHIPPING CARTON (2PC): 12.69lbs (Drop) 11.15lbs (Non-Drop)

DIMENSIONS

DIMENSIONS OF PRODUCT (INCHES) 23.74 x 23.74 x 1.378

DIMENSION OF SHIPPING CARTON 27.55 x 6.29 x 27.55 (Drop) 25.39 x 3.74 x 25.78 (Non-Drop)

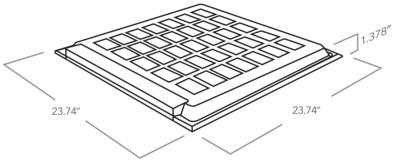

SPECIFICATIONS

PART NUMBER	GT-BP22-40W-50-B0
INPUT POWER	40W (Reported Data)
VIEWING ANGLE	120°
COLOR TEMPERATURE	5000K (Reported Data)
CRI	81.2
MOTION SENSOR	Not Included
SURGE PROTECTOR	1500V surge resistant
LED TYPE	SMD2835
LED BRAND	Lumileds
LED QTY	64PCS
HOUSING MATERIAL	Metal
HOUSING COLOR	White
LUMENS OUTPUT	2560 LM (Reported Data)

INPUT VOLTAGE	120-277V
PF	0.9244
THD	15.2%
DRIVER MODEL	LH Driver -40W
DIMMABLE VOLTAGE	0-10V
MOUNT TYPE	Recessed
LIFETIME HOURS	50,000 Hours
IP RATING	IP20
OPERTAING TEMPERATURE	-4°F to 113°F
CERTIFICATIONS	UL, CE, RoHS
PIECES PER SHIPPING CARTON	2PCS
LENS COVER	PMMA
LUMENS/WATT	125

