

LED Backlit Panel Light

2X2, 2X4, 1X4 RECESSED LED PANELS



SPECIFICATION

Item	LED Backlit Panel Light
LED Type	2835
Housing	Aluminum
Life Time	>50,000 Hrs
THD	<20%
Finish	White
Surge Protection	L-N:1KV LN-PG:2KV
Power Factor	≥0.90
Beam Angle	120°
Operating Temp.	-20 C to +45 C
Frequency	50/60Hz
CRI	>80
Mounting	Recessed

CERTIFICATIONS



DESCRIPTIONS

- The 1x4, 2x2 and 2x4 LED panels come with 3 CCT and 3 Wattage Selectable options which allows one to choose the most suitable solution from the project.
- The Back-lit design is without a LGP film, so there is no risk for yellowing. The PMMA lens offers an uniform light effect. If needed, there are also add additional functions such as motion sensor and emergency battery drivers.

FEATURES

- Field 3 CCT selectable & 3 Watts adjustable
- Flicker free driver
- 12V AUX driver available
- Emergency battery drivers for options
- Motion sensor for options
- Uniform light effect with optic PMMA lens

OPTIONAL ACCESSORIES UPON REQUEST



Motion Sensor



Bluetooth sensor



8W/15W Emergency drivers




Surface mount kit



Suspension kit

DIMENSIONS

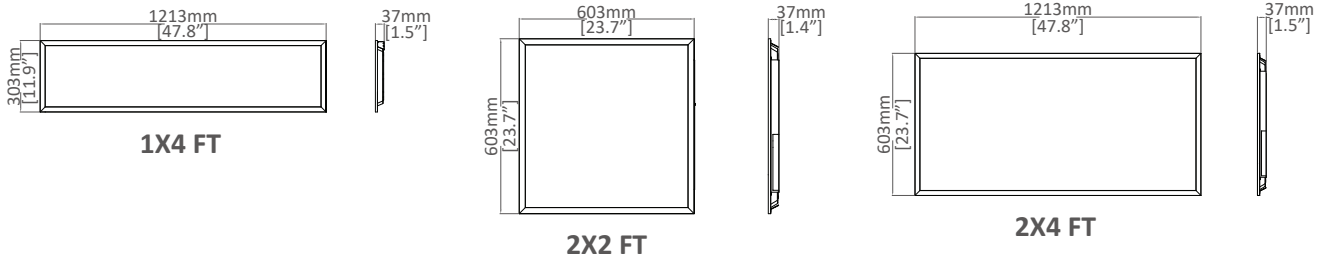

PACKING INFO.

Model	Size(mm)	Product Weight (Kg)		Product Weight (Kg)		Carton Size(mm)	Q'ty/CTN (PCS)	20GP (PCS)	40HQ (PCS)
		N.W/PC	G.W/PC	N.W/CTN	G.W/CTN				
GT-22-40W-X3C3	603*603*37	2.0	4.6	12.0	15.1	68*37*69.5	6	918	2142
GT-14-40W-X3C3	1213*303*37	2.2	5.0	13.2	16.4	129.5*37*39.5	6	750	1944
GT-24-50W-X3C3 GT-24-50W-X3C3	1213*603*37	4.0	9.2	19.6	19.6	129.5*25*69.5	4	456	1092

PERFORMANCE SUMMARY

3CCT & 3 Watts Selectable

Model	Size	Watts	Watts	CCT	Efficacy	Volt	DIM	Sensor	BBU
GT-22-40W-X3C3	2X2	40W	25/30/40W	3 CCT 35K/40K/50K	110LM/W 125LM/W 140LM/W	120-277V 120-347V	0-10V	Yes	Yes
GT-22-40W-X3C3	1X4	40W	25/30/40W						
GT-24-50W-X3C3	2X4	50W	30/40/50W						
GT-24-50W-X3C3	2X4	60W	40/50/60W						