

Braeburn®

7205

**Up to 3 Heat / 2 Cool Heat Pump
Up to 2 Heat / 2 Cool Conventional
Smart Wi-Fi Universal Thermostat**



BlueLink
smart connect



**5 YEAR
LIMITED
WARRANTY**

Phone not included.

Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 3 sq. in. Backlit Display
- Bright Blue Backlight
- Auto or Manual Changeover
- User and Installer Lock Modes
- SmartLimit™ Temperature Limits
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered
- Circulating Fan Mode
- Wi-Fi works without common (C) wire on most systems; requires common on Heat Pump, Heat Only or Cool Only Systems

Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- BlueLink QuickCopy® Allows User to Duplicate Program and Configuration to Other Thermostats
- QuickEdit® Makes Schedule Changes Easy
- BlueLink SmartData® Energy Report Capability
- Monitor and Control Multiple Thermostats
- Easy Access Dealer Information
- Optional Geofencing for Increased Energy Savings

FREE Color Contractor Branding!
Visit braeburnonline.com



Compatible with Amazon Alexa
Amazon Alexa is a trademark of Amazon.com, Inc.





www.bluelinksmartconnect.com

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

BlueLink Smart Connect® Application Screens




Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.

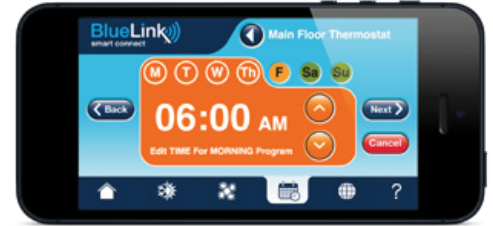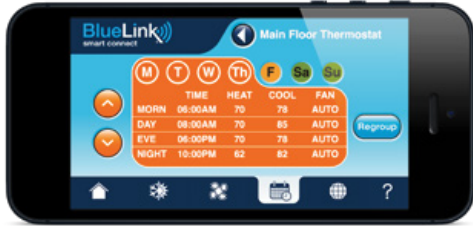

BlueLink SmartData® Energy Reports


Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.

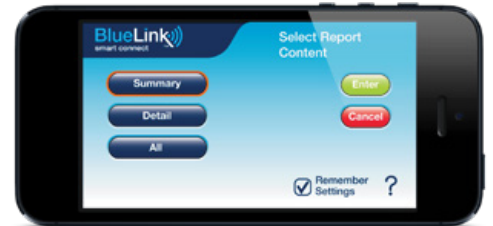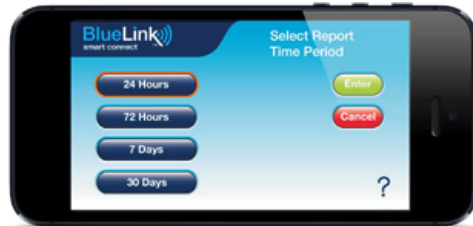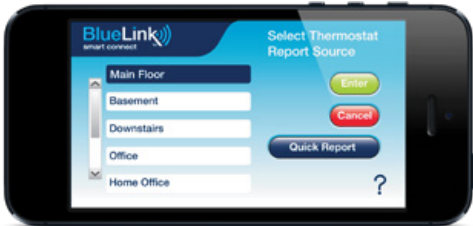

Geofencing



BlueLink QuickCopy® Feature

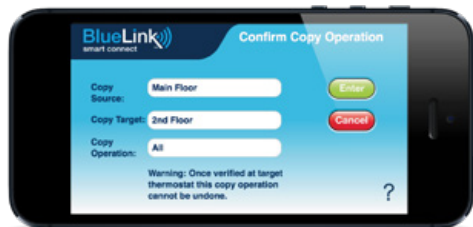

Service and Temperature Alerts



Product Specifications

Dimensions:	3.70" x 5.2" x 1.38"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 5 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
To Use Wi-Fi:	Wi-Fi works without common (C) wire on most systems; requires common on Heat Pump, Heat Only or Cool Only Systems
Compatibility:	Heat pump systems up to 3 heat/2 cool, Conventional systems up to 2 heat/2 cool
Wi-Fi Communication:	802.11
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Terminations:	Rh, Rc, C, W2, W1/E/W3, O/B, G, Y2, Y1, K

Shipping Information

INDIVIDUAL CARTON
Dimensions: 4.5" x 5.75" x 2.25"
Weight: 1.0 lbs.

MASTER CARTON
Quantity: 3
Dimensions: 7.15" x 6" x 4.7"
Cubic Feet: .14
Weight: 3.25 lbs.

Braeburn 7205 Replaces*

Honeywell® TH8732WF, TH6220WF	Pro1® T855i, T701i
Emerson® 1F86U-42WF	Nest® T100577, T200577, T3007ES

*Verify specific application requirements. All trademarks are the property of their respective owners.

Accessories

7340 Share-a-Wire® Module	2920 Vertical J-Box Adapter Wall Plate (6.5" x 5.1")
5970 Universal Thermostat Guard	2950 Universal Wall Plate (6.5" x 6.5")

FREE Contractor Branding Available! Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google and Google Play are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.