




# INSTALLATION GUIDE

# PROTECT for outer rim

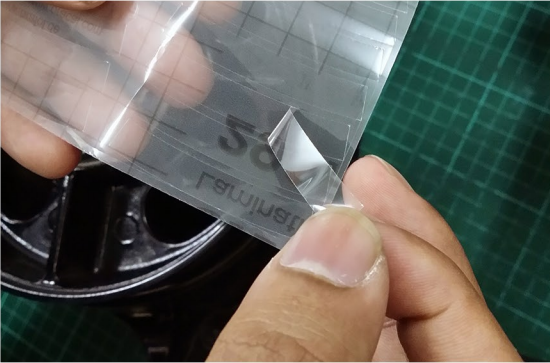

Remove 1 strip from backing paper /plastic (glossy side).



Align Protect sticker to cover total area of sharp edge of outer rim strip attached to rim.



Firmly squigee or press down sticker against rim to ensure complete adhesion to rim.



Remove any bubbles by pricking it with a sharp needle and pushing the air out from the resulting pinprick hole.

## ADDITIONAL INFO

**For Rapid/Vector/Rapid Tricolore/Rapid Mod 1 and 2**

- a) Use 2 units of protect sticker on each strip
- b) Total number of protect sticker used on each side of rim : 6

**For Swift**

- a) Use 1 unit of protect sticker to cover the joint between 2 strips
- b) Total number of protect sticker used each side of rim : 5