


**CYGNETT®**

# ChargeUp Auto 7.5K

**7,500mAh  
Portable Powerbank**

User Manual

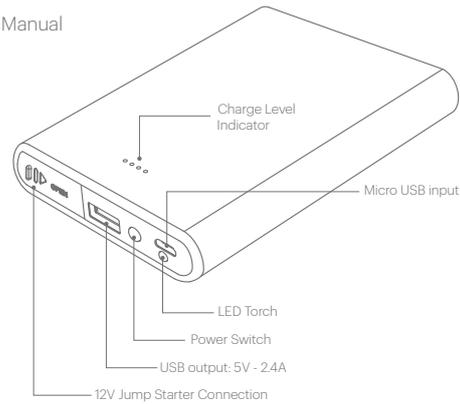

Jump Starter



High Security



PowerBank




Emergency lighting





Mini

Mini &amp; easy


④




1. Connect the jumper cable to the Jump Starter

2. Red clamp connect "+"  
Black clamp connect "-"

3. Start the vehicle



4. Remove the clamps from the battery



5. Remove the cable from the Jump Starter

- Before use make sure the device is charged to at least 75% (3 solid lights) on the charge level indicator.
- Connect the Jumper cable to the 12V connector of the ChargeUpAuto by removing the rubber cover
- Connect the red clip to the positive terminal of the battery, and the back clip to the negative terminal
- Once the light has turned green the vehicle is ready to start
- Once the vehicle has started, disconnect the ChargeUp from the battery cable, and then disconnect the cable from the battery

## Package Contents

No.	Parts	QTY
1	Cygnett ChargeUp Auto 7.5K	1
2	Micro USB Charge Cable	1
3	Battery Connector	1
4	Instruction Manual	1

## Product Specifications

- Dimensions 137.5 x 82.5 x 19.5mm
- Battery Capacity 7,500mAh
- Start Current: 12V/200A (Peak 400A)
- USB input: 5V 2.0A (Max)
- Operating Temperature: -20°-60°C

## The ChargeUp Auto 7.5K can jump start vehicles up to below configuration

Supported Engine Type	Size
Petrol Engine	3.0L
Diesel Engine	2.0L


⑤

- ⚠ Do not expose to liquid or moisture
- ⚠ Do not attempt to open or tamper with the device
- ⚠ Warranty void if device is tampered with
- ⚠ Not suitable for children
- ⚠ Do not connect the positive and negative clips together
- ⚠ Do not expose the device to temperatures above 40°C
- ⚠ Do not overcharge the device
- ⚠ Do not expose to fire, or sources of latent heat
- ⚠ Do not use the device if damaged from impact or drop
- ⚠ Follow the instruction carefully before use
- ⚠ Contact Cygnett in case of faulty device or warranty claim
- ⚠ Charge the device every 3 months if not in use
- ⚠ Remove the device within 30 secs of starting vehicle
- ⚠ Do not touch device if any liquid leaks from battery



Standard: GB/T 18287-2000



③

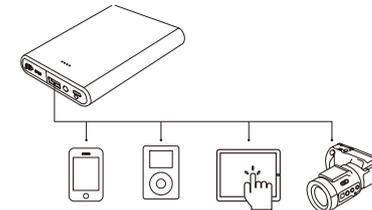

- The ChargeUp can power your smart phone or tablet from the 5V USB connection.
- Using the charge cable for your device, connect to the 5V USB connector on the ChargeUp, and connect the other end to your device.
- Then press the power button on the ChargeUp to begin charging your device.

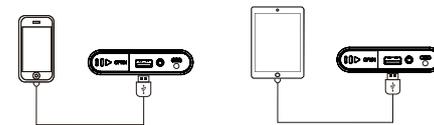

G10英文版说明书3140000000056  
 规格: 75\*105mm 双面印刷风琴3折页  
 材质: 光面127g白色铜版纸  
 折叠整齐: 折叠时第一页在最上面

※ If the product into the hibernation status (press with no display), please active it with charging 1 min; If still not work after activation, please contact the vendor.