



## **GoGun® Gas Pedal®** Grip Installation Instructions

- 1) The Gas Pedal® Grip is intended for mount by professional gunsmith because it requires Drill and tap into frame 5-40 pattern. (Dust Cover). See diagram for recommended position. For optimum results plane of pedal should pass behind axis of slide stop (aft or towards shooter). However shooter preference may override this position which is why multiple holes are drilled in Gas Pedal® piece.
- 2) If your Scope already has C-More type spacing AND it is already drilled and tapped for 5-40, you can remove those screws and use the supplied screws thru the Pedal and scope mount to frame. But make sure there is purchase of screws all the way to frame not just to scope mount.
- 3) Whether you drill and tap new holes or use existing holes PLEASE use the supplied 5-40 screws. They are tested over time and have never failed. However some substituted screws has failed. The supplied screws are mated to the chamfered holes to allow just a bit of play so as to render risk of failure minimal to none and to ease taking on off without stress to gun or Pedal.
- 4) It is likely you will have to trim excess length of screws on inner surface of frame (Dust Cover). Dremel works well for trimming. Once trimmed save screws if you ever remove them later and use same screws again.
- 5) Please do NOT use Loctite as shooter will likely want to remove or reposition Pedal later. If Loctite is used, don't use anything more than blue Loctite. Shooter should check tension of screws before each match.
- 6) The spacing of holes is .375 Inches on center or .750 over two holes.
- 7) It is recommend that at least three screws be used for maximum stiffness. Two screws may be used but some shooters will notice minute flexion of pedal with two screws. If only two holes are used it is best to make dedicated holes between scope mount screws so Pedal may be removed without having to re zero the scope. It is ok to start with two screws and see if shooter requires third one later after position has been established.
- 8) The Racer Cut has flush base and will clear slide when mounted over scope mount.
- 9) When shooting limited or without a scope use Duster Model.because it has flange on base so slide will clear the pedal. The Duster Model will fit standard and wide modular frames like STI, but is not wide enough for 1911 without a custom gunsmith made spacer.
- 10) See diagram, following page

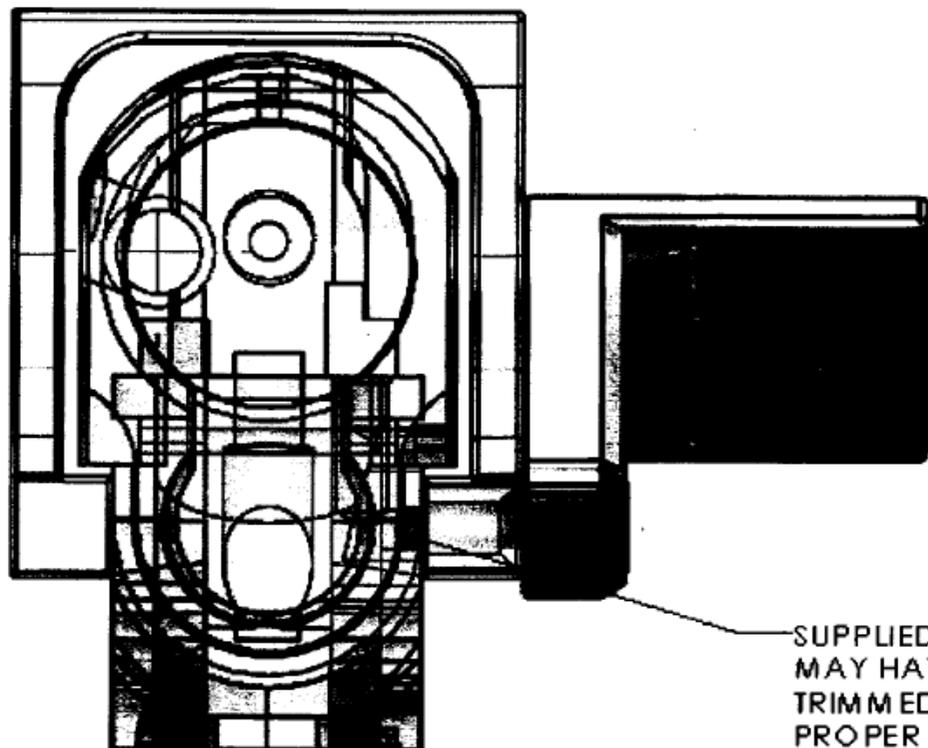

SUPPLIED SCREWS  
MAY HAVE TO BE  
TRIMMED FOR  
PROPER FIT

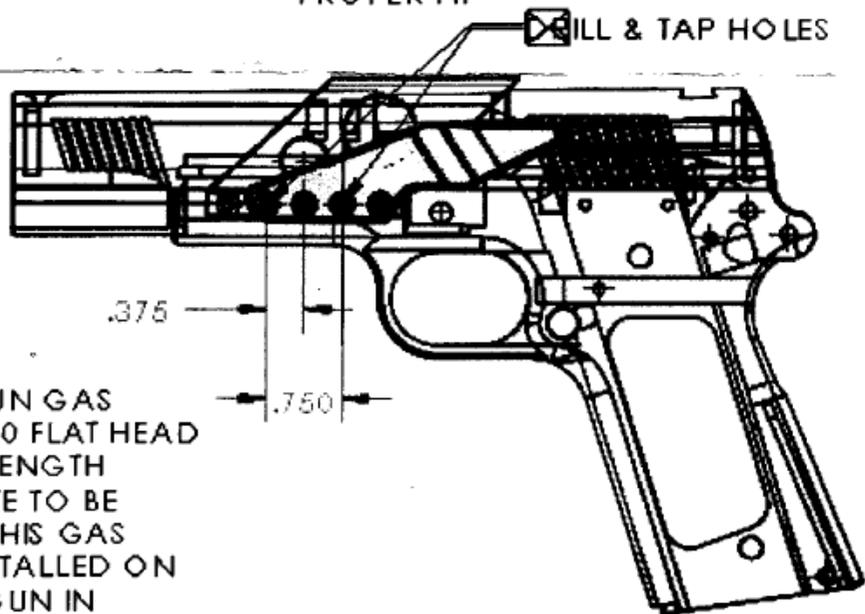

GUNSMITH INSTALLATION  
RECOMMENDED. THE GOGUN GAS  
PEDAL IS SUPPLIED WITH 4 5-40 FLAT HEAD  
CAPS SCREWS, 5/8 INCH IN LENGTH  
(SUPPLIED SCREWS MAY HAVE TO BE  
TRIMMED FOR PROPER FIT). THIS GAS  
PEDAL IS INTENDED TO BE INSTALLED ON  
THE LEFT HAND SIDE OF THE GUN IN  
CONJUNCTION WITH A C-MORE SCOPE.  
THE GAS PEDAL IS PRE-DRILLED WITH  
IDENTICAL HOLE SPACING TO THE C-  
MORE, BUT WITH 2 EXTRA HOLES. HOLE  
SPACING IS .375" CENTER TO CENTER.