



8123HAQ-ES

6" IC Airtight Fluorescent Housing



Royal Pacific Ltd.
 4931 Paseo Del Norte NE
 Albuquerque, NM 87113
 Ph: 1-800-937-6925
 Fax: 1-888-207-9509

FLUORESCENT HOUSING

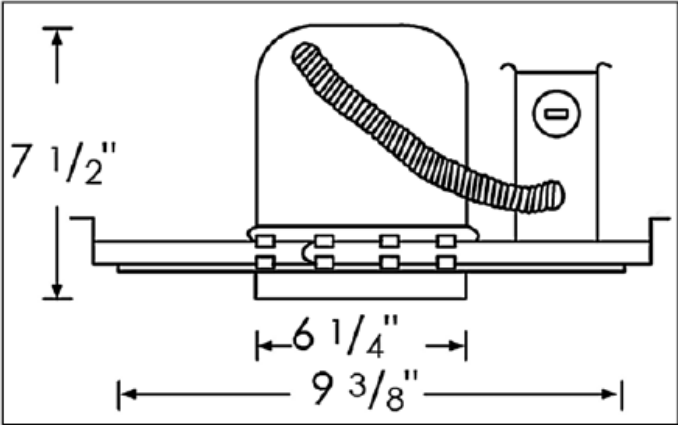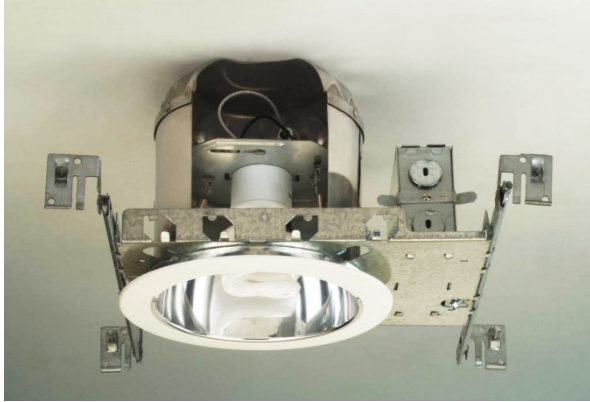

GENERAL DESCRIPTION

Designed for use where housing will be in direct contact with insulation.

MAIN FEATURES

Standards Conformance

- IC Rated for direct contact with Non-Cellulose type insulation.
- Thermally protected against improper lamping.
- Meets Washington State energy code for restricted airflow requirements.

Listing

- ETL & cETL listed for damp location and feed-through wiring.
- Energy Star- [8123HAQ-2327](#)

Fit

- Adjusts to accommodate up to 1" ceiling thickness.
- 7 1/2" height allows use in 2"x8" joist construction.

Lamps

- Compact Fluorescent
- 8123HAQ-E1327- 13W GU24-2700K
- 8123HAQ-E1341- 13W GU24- 4100K
- 8123HAQ-E1827- 18W GU24- 2700K
- 8123HAQ-E1841- 18W GU24- 4100K
- 8123HAQ-E2327- 23W GU24- 2700K (ES)
- 8123HAQ-E2341 -23W GU24- 4100K



Junction Box

- Listed for through-branch circuit wiring (4 in-4 out) and seven 1/2" knockouts and four non-metallic cable knockouts with strain clamps.
- 3-port quick connectors pre-installed in J-Box.

Bar Hangers

- Pre-Installed bar hangers allow the housing to be positioned at any point within the 24" joist span.
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers.

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks