



Installation Instructions

Installation Warning


If you feel uncomfortable installing this product, we recommend having a professional complete the installation. Eagle Lights LLC is not liable for any damage to the product or vehicle due to an improper installation. If you have questions about the installation, please feel free to call us at 1-800-921-3162 or email us at Support@EagleLights.com.




WARNING!




- To prevent possible electrical shock, disconnect the negative battery terminal before installing this product.
- Confirm the Ignition Switch is in the OFF position. If not, switch the bike to the off position.
- Park the bike on a level surface.
- Install the small bracket on the mounting bracket as shown below:

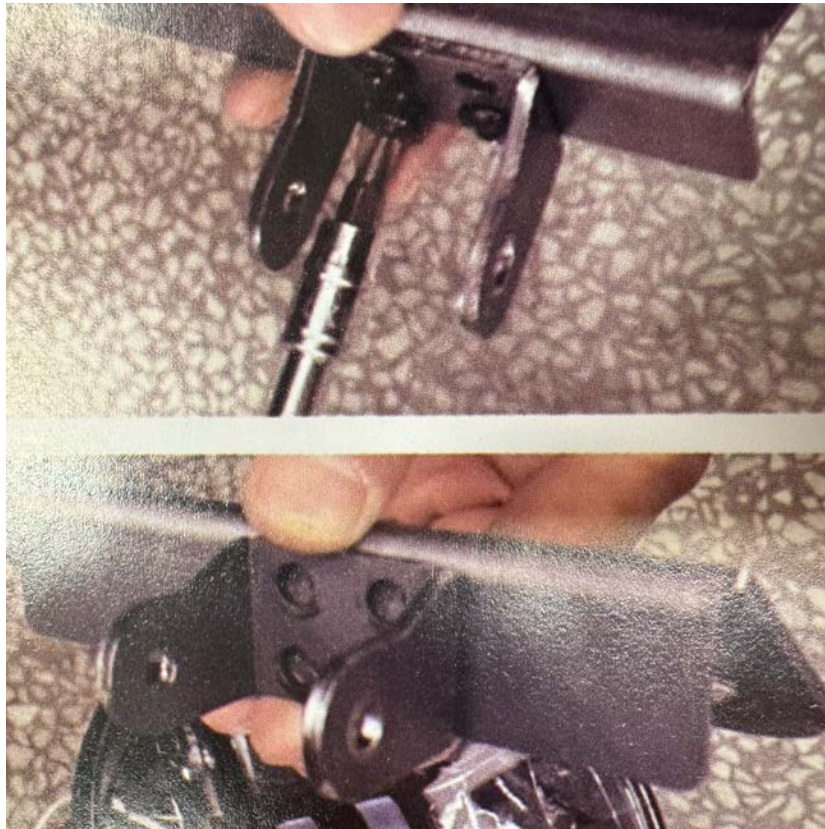


- Remove the seat and the bolt below the fuel tank. The bolt does not have to be completely undone. You will find the original headlight plug there. Disconnect the plug as shown below:

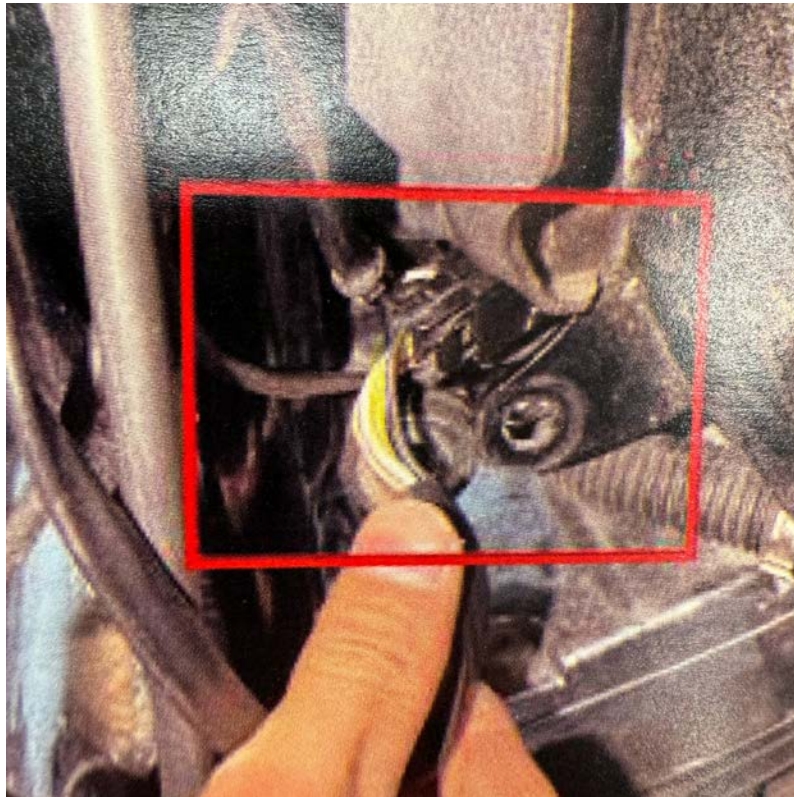

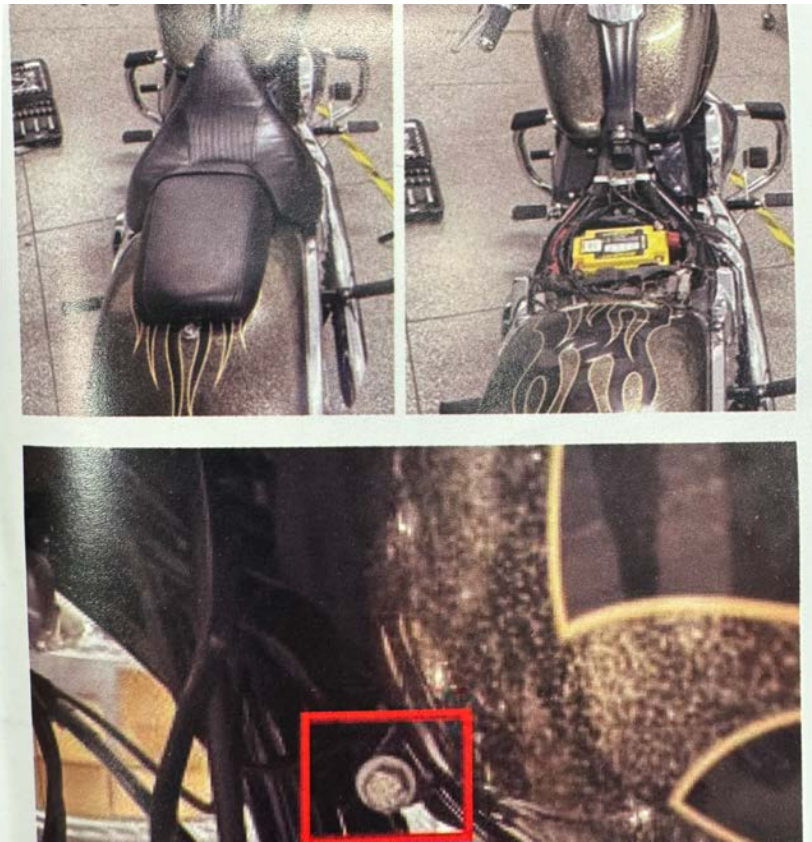

- Unbolt the original headlight. The bolt is located on the bottom of the triple tree as seen in the picture below:

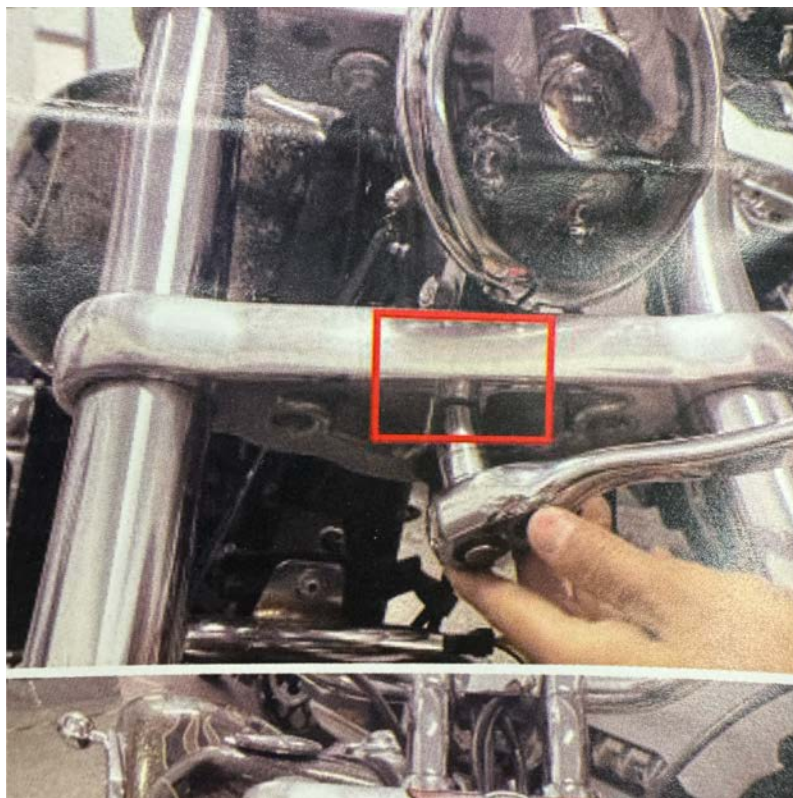



- Undo the two bolts underneath the handlebars. The bracket will connect with these bolts. As shown below:





- Attach the headlight to the bracket with the provided hardware. Then connect the wiring to the headlight.

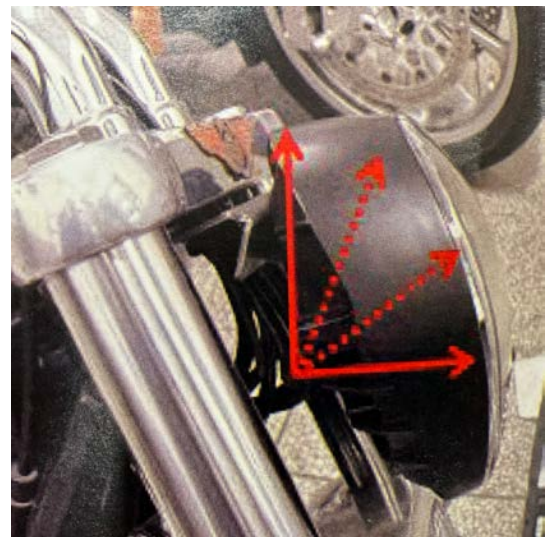

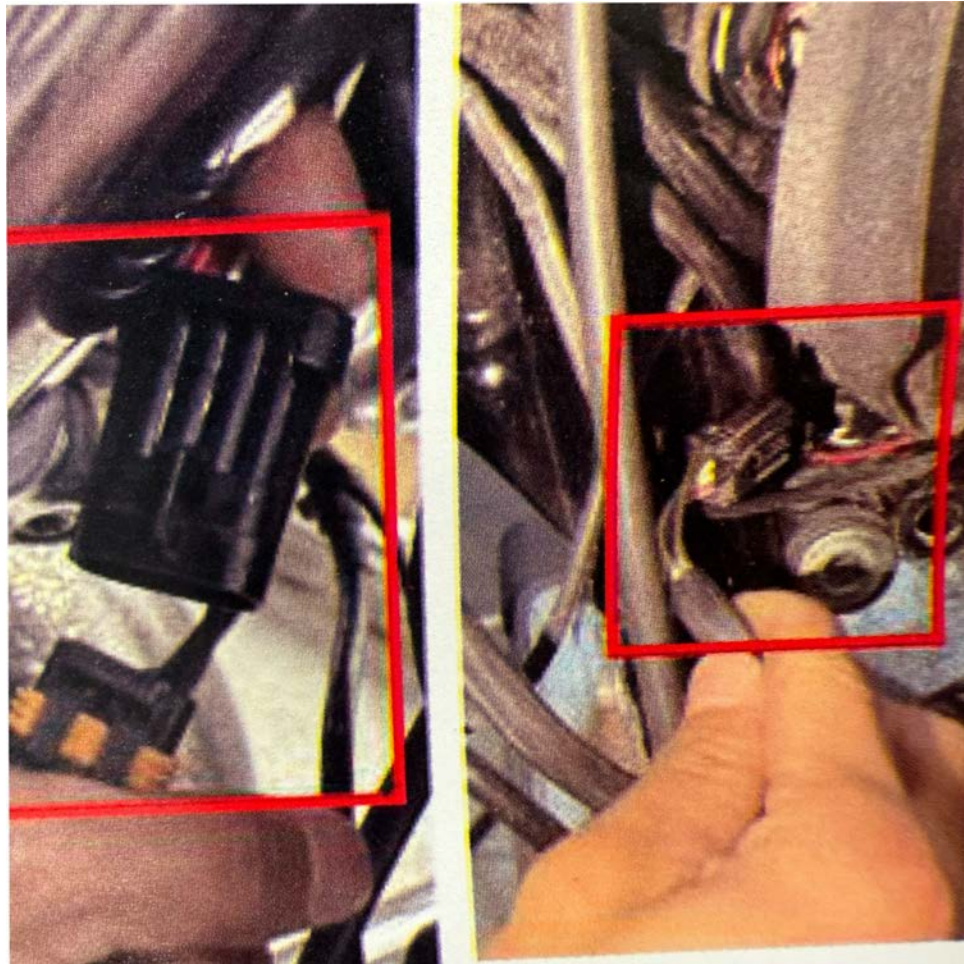

- Test headlights high and low beam functions.