

8700-BCKT Installation Instructions

Product Overview:

The Eagle Lights 7" bucket accepts all Eagle Lights 7" 8700 series LED headlights. Made to be used when the standard headlight bucket does not accept LED headlights such has Honda VTX, Yamaha Strykers and many more. Can fit on any motorcycles with 32 to 40mm fork tubes. Easy two clamp installation. Available in both black and chrome to match your bike.



Typical Installation

Normal installation requires only a few tools, takes less than 15 minutes.

Required Tools

Philips-Head Screwdriver

Installation Warning

If you feel uncomfortable installing this product, we recommend having a professional complete the installation. Eagle Lights LLC is not liable for any damage to the product or vehicle due to an improper installation. If you have questions about the installation, please feel free to call us at 1-800-921-3162 or email us at Support@EagleLights.com.

Installation:

Below are steps for a typical installation. Steps may be different depending on the make and model of motorcycle. Please ensure you have read through the instructions and




understand them clearly before attempting the installation.

WARNING!

 To prevent possible electrical shock, disconnect the negative battery terminal before installing this product.

- Remove the smallest ring from the package. Place the headlight over the ring. There will be three notches that will align the headlight on the back. It can only fit in one

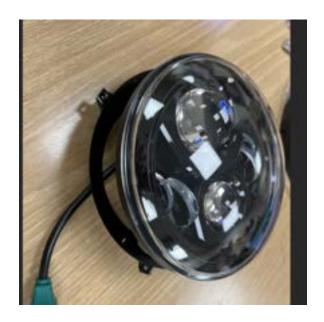

- Take the 2nd smallest ring from the package. Place the ring over the light. Ensure the slot goes through the alignment hole on the ring.




• Using the provided screws, attach the outer ring to the inner ring.





- Take the largest ring out of the package.
 Place the adjustment bolt from the hardware kit through the hole on the front and then place the spring over it.
 Place it through the hole on the smallest
- Use a square nut from the hardware kit to secure the spring bolt.



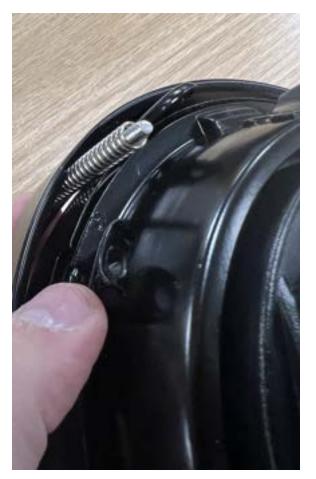

Using 2 of the square nuts and two standard bolts (not the bolts with the collar), connect the rings together at the top and bottom.



- Snap the headlight into the main bucket. Make sure to align the holes in the headlight to the bottom.
- Spin the headlight if the holes are not aligned Use the tapered screws to hold the headlight into the bucket.

