



9500B-FTS Installation Instructions

Installation Warning

If you feel uncomfortable installing this product, we recommend having a professional complete the installation. Eagle Lights LLC is not liable for any damage to the product or vehicle due to an improper installation. If you have questions about the installation, please feel free to call us at 1-800-921-3162 or email us at Support@EagleLights.com.

Installation:

Please ensure you have read through the instructions and understand them clearly before attempting the installation.

WARNING!

- To prevent possible electrical shock, disconnect the negative battery terminal before installing this product. Park the bike on a level surface.

Remove bolts from the wind shield. Remove wind shield and place to the side.



Remove the dash cover. Place it to the side.



2

Remove the speaker covers.



Remove the bolts holding on the fairing and the bolts to the turn signal bracket.



3

Remove screws holding in the headlight. Unplug the headlight and place it to the side. Remove side bolt.



Place foam on the inside of the new fork LED light. Align on to the forks. Using the bolt removed from the previous step, attach the fork LED light to the bike.




Route the wiring from the fork LED light up into the space for the headlight.



Connect the larger plug to the headlight plug.




Disconnect the turn signal wiring. Leave disconnected for now

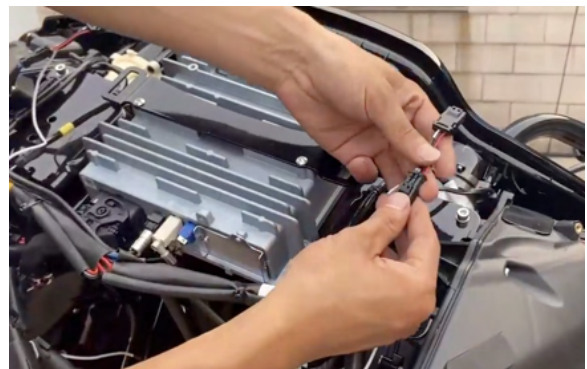

5

Replug in the headlight.

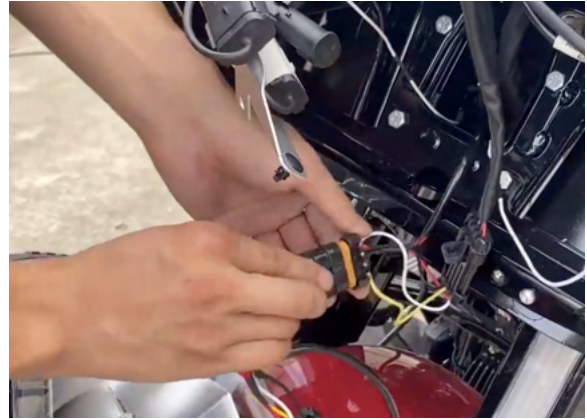

Reinstall the headlight.



Connect the turn signals from the fork turn signal to the turn signal wiring on the bike.



6

Test turn signal and running light functions



Reinstall the fairing, dash cover and windshield.