

AIRSHIELD Air Cleaner Instructions.

Product Overview:

Below are steps for a typical installation on most harley models. Steps may be different depending on the model and year of your motorcycle. Ensure you have read through the instructions and understand them clearly before attempting the installation.

Installation Warning

If you feel uncomfortable installing this product, we recommend having a professional complete the installation. Eagle Lights LLC is not liable for any damage to the product or vehicle due to an improper installation.

If you have questions about the installation, please feel free to call us at 1-800-921-3162 or email us at Support@EagleLights.com.

Installation:

.

WARNING!



- To prevent possible electrical shock, disconnect the negative battery terminal before installing this
 product.
- Wear eye protection.

1. Remove stock cleaner cover.



2. Remove the stock air filter. Remove any bolts holding in the air filter.



3. Remove air filter tube




4. Remove original air filter backing



5. Remove original air filter bracket



6. Place new air filter gasket on the throttle body.

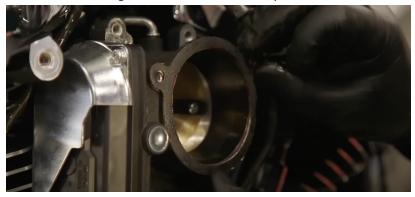

7. Place gaskets onto bolt holes on either side of the new air filter backing plate.





8. Install backing plate on the throttle body with provided bolts.



9. Reinstall bolts into filter backing plate.



10. Install bolt vanity covers.



11. Reinstall new air filter with cover.