



Eagle Lights

JEEP WRANGLER LED HEADLIGHT INSTALLATION INSTRUCTIONS:

Warning!

If you **do not** feel comfortable with the installation process, it is recommended to have a professional complete the installation.

These instructions are a general overview of how to remove the headlight grill and prepare your Jeep for an LED conversion.

Tools Required:

- T15 Torx
- Flat Head Screwdriver

Installation

Read and understand all steps in the instructions before starting the installation.

Step 1: Unfasten the grill

To remove the grill, there are 6 pull-tabs located on the top.

Using the flat head screwdriver, pull up the center portion of the pull tab and then remove it from the grill. Repeat this for all 6 pull tabs. Do not pull the grill off the Jeep

yet.



Step 2: Unplug the turn signal wiring

The wiring for the left and right turn signals needs to be removed prior to removing the grill. Unplug the turn signal wiring on the left and right sides.



Step 3: Remove the grill

On the bottom are a few tabs that secure the grill. Firmly pull on the bottom left side of the grill towards you. Then firmly pull on the bottom right side of the grill towards you.





Eagle Lights

Step 4: Remove the original headlight

Using the T15 Torx Wrench, unscrew the screws that fasten the trim ring to the Jeep.



Unplug the headlight from the Jeep.




Step 5: Connect the LED Headlight

Install the new headlight into your Jeep utilizing the harnesses in the kit.


Step 6: Install headlight trim ring

Reinstall the headlight trim ring on the new LED headlight. Use the T15 torx screwdriver to drive the screws in.

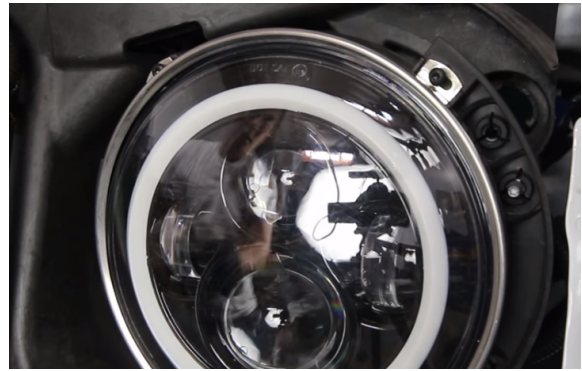

Step 7: Reinstall the grill

Starting at the bottom, realign the headlight with the guiding pin on the bottom. Then apply pressure to reseat the clips.

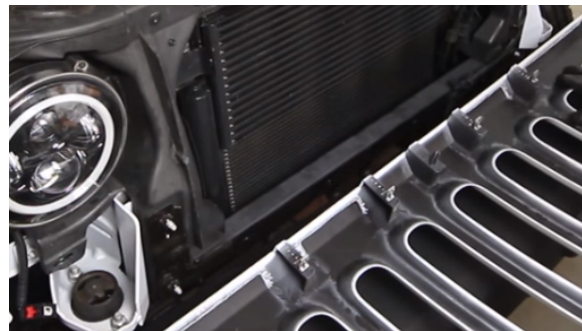

Step 8: Reinstall the top clips.

Reinstall the top clips to the grill. Push the clip down to relock it. Repeat for all 6 clips.