

HIBLOW HP-80W

Product Details:

- Pumps equipped with thermal overload protection
- Includes pressure tap location for external alarm sensor
- Dual Port
- Will support an airlift style skimmer
- 6' power cord




Rated Voltage (VAC)	120
Power Consumption (Watts)	80
Rated Pressure (PSI)	2.13
Rated Air Flow (lpm @ Rated Pressures)	80
Maximum Airflow (lpm @ 0 PSI)	120
Max. Cont. Operating Pressure (PSI)	3.6
Noise Level (dBA)	39
Weight (lb.)	15.4

SPECIFICATIONS FOR HIBLOW HP-80W

- 4.2 cfm / 120 lpm maximum air flow (@ 0 PSI)
- 80 lpm (Liters Per Minute) @ 2.13 PSI
- 3.6 maximum continuous operating pressure
- 120 VAC, 60 Hz, 1.7 A, 80 W
- 36 dBA measured at one meter
- Dimensions Approximately 11'' x 8'' x 8''
- 16 pounds



PERFORMANCE CURVES

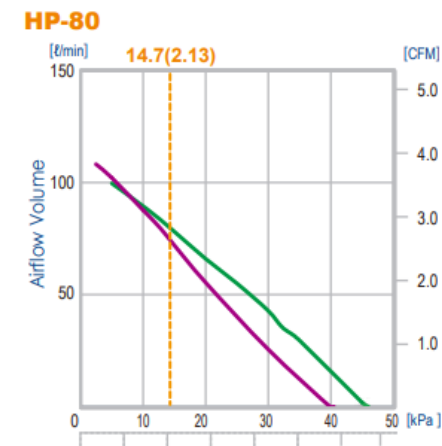

Performance Curves

--- Rated Loading Pressure [kPa(PSI)]
 --- 50Hz --- 60Hz