

LED 6 inch Slim Ultra-Thin Square, Black Finish, Selectable CCT

ITEM	P-5158
DESCRIPTION	S6/18W/SQ/LED/5CCT
COLOR TEMP	27, 30, 35, 41, 50k
OUTPUT LUMEN	1400
BEAM ANGLE	100
INPUT VOLTS	120V
WATTAGE	18W
EQUIV. WATTAGE	150W
CRI	>90
DIMMABLE	Yes
CUTOUT	6.20
OD	7.20
HEIGHT	2.00
mA	390mA
OUTPUT VOLTS	38v



P-5158

- **SOFT WHITE** 2700K
- **WARM WHITE** 3000K
- **NEUTRAL WHITE** 3500K
- **COOL WHITE** 4100K
- **SUPER WHITE** 5000K




- 6.20 inch Ceiling Space Required
- 50,000 Hours Rated Average Life
- ETL Listed & 3-Year Warranty
- 90+ CRI Models Provide Superior Color

Accessories




Emergency LED Driver
15W P-5262
30W P-5263




New Construction Plate
P-5265 (2 Punch Outs)



120-277V Driver
P-5258 (0-10 Dimming)



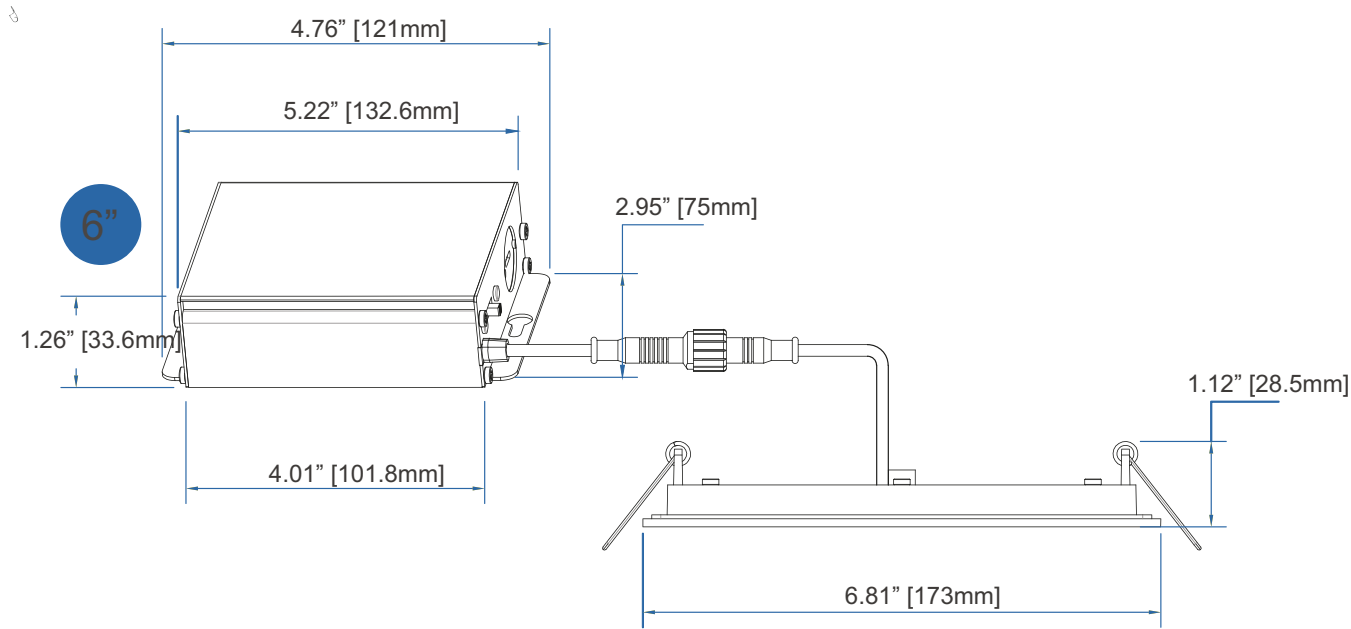

DimmerList

BRAND	SERIES	MODEL	LOAD	BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W		SURESLIDE	6674	150W
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W