

LED 4" Square White Baffle, 15W=120W, Soft White 2700k, (Luminaire)

ITEM	P-5757
DESCRIPTION	M4/15W/LED/27k
COLOR TEMP	2700k
OUTPUT LUMEN	1100
BEAM ANGLE	40°
INPUT VOLTS	120V
WATTAGE	15W
EQUIV. WATTAGE	120W
CRI	>90
DIMMABLE	Yes
CUTOUT	3.75
OD	4.50
HEIGHT	3.15
mA	230mA
OUTPUT VOLTAGE	36v



P-5757

● SOFT WHITE 2700K


Module: P-5063



Accessories



Emergency LED Driver
15W P-5262
30W P-5263



New Construction Plate
P-5266 (2 Punches)



120-277V Driver
15W P-5253


Dimmable:
5%

Lifetime:
50,000 hours

Warranty:
3 years



Cut Out 3 3/4" [200mm]

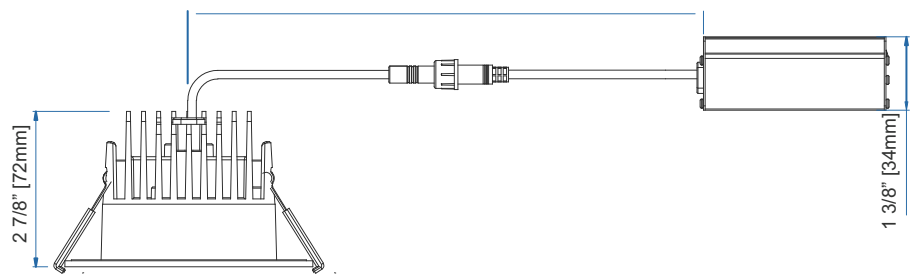

DimmerList

BRAND	SERIES	MODEL	LOAD	DIMMABILITY	BRAND	SERIES	MODEL	LOAD	DIMMABILITY
LUTRON	ARIADNI	AYCL-153P	150W	OK	LUTRON	TOGGLER	TG-600P	600W	OK
	DIVA	DV-600PR	600W	OK		TOGGLER	TGCL-153P	150W	OK
	DIVA	DVCL-153P	150W	OK		CASETA	WIRELESS DIMMER	150W	OK
	MAESTRO	MACL-153MH	600W	OK		SURESLIDE	6633	600W	OK
	MAESTRO WIRELESS	MRF2-6CL	150W	OK	LEVITON	SURESLIDE DECORA	6674	600W	20-100%
	ROTARY	D-600P	600W	OK		TRIMATRON	6602	600W	20-100%
	ELECTRONIC	NTELV-300P	600W	OK		ILLVMATECH	IPL06	600W	OK
	SKYLARK	S-600P	600W	OK	LEGRAND	ADORNE	ADTP703TU	700W	20-100%
	SKYLARK CONTOUR	CT-600P	600W	OK		HARMONY	H703PTW	700W	OK
	SKYLARK CONTOUR	CLCL-153P	153W	OK	COOPER	ASPIRE	9540	1000W	OK
						DEVINE	DAL06P	300W	OK