

LED 4" Engine Downlight High Lumens, 60° Flood, Selectable CCT, (Luminaire)

ITEM	P-6139
DESCRIPTION	M4/23W/LED/5CCT 60°
COLOR TEMP	27, 30, 35, 41, 50k
OUTPUT LUMEN	1800
BEAM ANGLE	60°
INPUT VOLTS	120V
WATTAGE	23W
EQUIV. WATTAGE	175W
CRI	>90
DIMMABLE	Yes
CUTOUT	3.75
OD	4.50
HEIGHT	4.85
mA	550mA
OUTPUT VOLTAGE	36v



P-6139


- SOFT WHITE 2700K
- WARM WHITE 3000K
- NEUTRAL WHITE 3500K
- COOL WHITE 4100K
- SUPER WHITE 5000K



Accessories




Emergency LED Driver
15W P-5262
30W P-5263




New Construction Plate
P-5266 (2 Punches)



120-227V Driver
15W P-5253



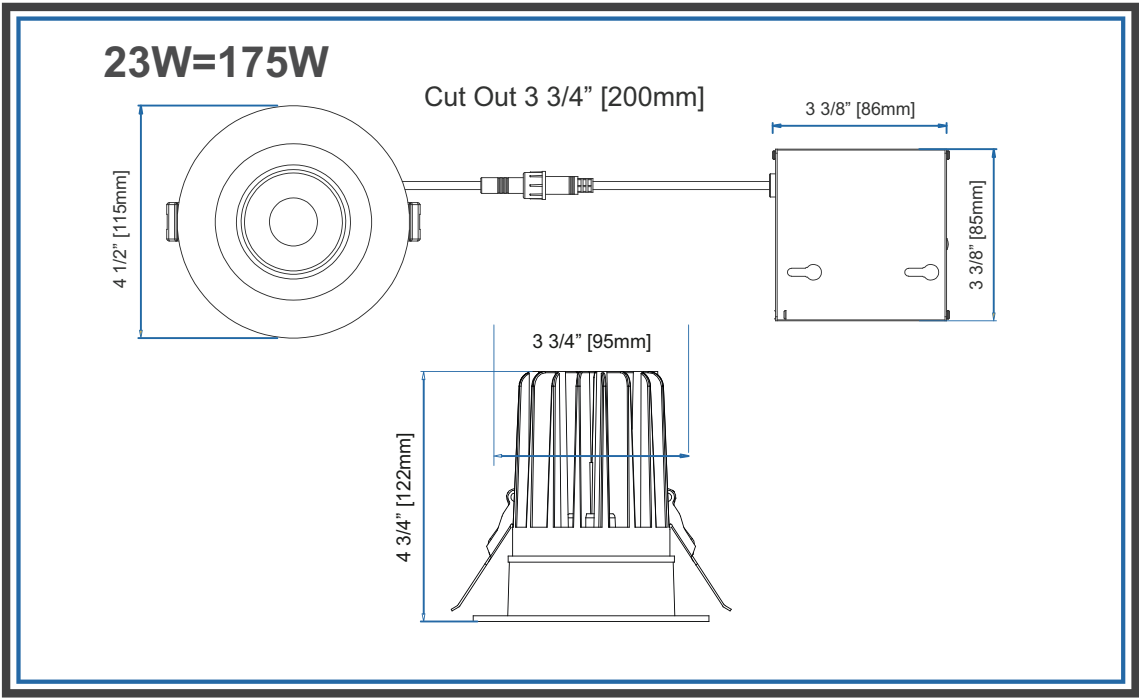

DimmerList

BRAND	SERIES	MODEL	LOAD	DIMMABILITY	BRAND	SERIES	MODEL	LOAD	DIMMABILITY
LUTRON	ARIADNI	AYCL-153P	150W	OK	LUTRON	TOGGLER	TG-600P	600W	OK
	DIVA	DV-600PR	600W	OK		TOGGLER	TGCL-153P	150W	OK
	DIVA	DVCL-153P	150W	OK		CASETA	WIRELESS DIMMER	150W	OK
	MAESTRO	MACL-153MH	600W	OK	LEVITON	SURESLIDE	6633	600W	OK
	MAESTRO WIRELESS	MRF2-6CL	150W	OK		SURESLIDE DECORA	6674	600W	20-100%
	ROTARY	D-600P	600W	OK		TRIMATRON	6602	600W	20-100%
	ELECTRONIC	NTELV-300P	600W	OK		ILLVMATECH	IPL06	600W	OK
	SKYLARK	S-600P	600W	OK	LEGRAND	ADORNE	ADTP703TU	700W	20-100%
	SKYLARK CONTOUR	CT-600P	600W	OK		HARMONY	H703PTW	700W	OK
	SKYLARK CONTOUR	CLCL-153P	153W	OK	COOPER	ASPIRE	9540	1000W	OK
						DEVINE	DAL06P	300W	OK